


VIEW ON MATING SIDE

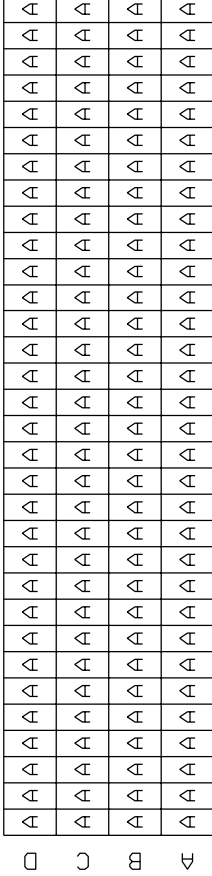

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

A = 128 STANDARD CONTACTS L=9.3

Marking	Standard
Performance level	G2/0 = Contact area perform.level2 / Termination tin
Flux proof	no
Fixing clip	no
Dimensions	SDA-85015-0001
Technical Data	PS-85013-0002

A	G2/0	a1-32	b1-32	c1-32	d1-32
Contact symbol	Perform. level	Contact position number			

ECN No. MG1998-2790 first release	REVISIONS		FOR PREVIOUS REVISIONS SEE MRI LIST	
	LTR			
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 2° INCH METRIC		DRWG BY Ca	SIGN	
3 PLACE ± .	±	CHK'D BY KN	SIGN	
2 PLACE ± .	±	APP'D BY FB	SIGN	
1 PLACE ± .	±	SCALE		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		DESIGN DIMENSION	<input type="checkbox"/> MM	<input type="checkbox"/> IN.
		EQUIVALENT DIMENSION	<input type="checkbox"/> MM	<input type="checkbox"/> IN.
IF TWO DIMENSIONS ARE SHOWN, THE UPPER IS THE DESIGN DIMENSION, LOWER IS SECONDARY				
REVISE ONLY ON CAD SYSTEM		SH. REV.		
CAD/CAM PROJECT NAME S8501500 S21		THIS DRAWING CONTAINS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
TITLE 128 pos. Male connector acc. DIN 41612 style R contacts arrangement		SHEET NO. DATE 1 OF 1 98/04/28		
PART NO. 85015-0024		DWG NO. SDA-85015-0024		SIZE A