

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 6 circuits
- Plating options available (contact Molex)

Reference Information

Packaging: Bag
 UL File No.: E29179
 CSA File No.: LR19980
 Mates With: 5195-N and 5239-N housings
 Designed In: Millimeters

Electrical


Voltage: 250V
 Current: 7.0A
 Contact Resistance: 10mΩ max.
 Dielectric Withstanding Voltage: 1500V AC/1 min.
 Insulation Resistance: 1000 MΩ min.

Physical


Housing: 6/6 nylon, UL 94V-2
 Contact: Brass, 1.14mm (.045") square
 Plating: Tin
 Operating Temperature: -40 to +105°C

molex® **3.96mm (.156") Pitch**
SPOX™
Header

5274-NA
Right Angle
Friction Lock

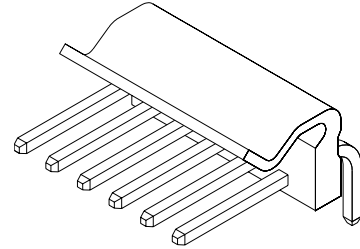

CATALOG DRAWING (FOR REFERENCE ONLY)

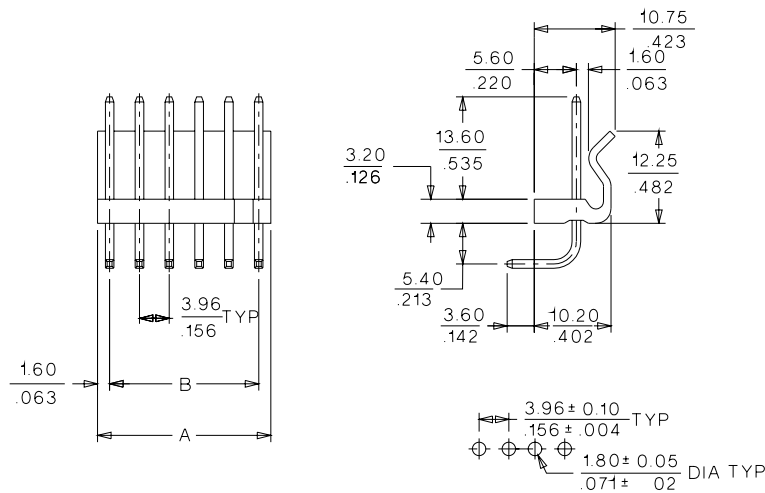

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	09-75-2024	7.16 (.282)	3.96 (.156)
3	09-75-2034	11.12 (.437)	7.92 (.312)
4	09-75-2044	15.08 (.593)	11.88 (.467)
5	09-75-2054	19.04 (.749)	15.84 (.623)
6	09-75-2064	23.00 (.906)	19.80 (.779)

D

3.00 to 7.92mm (.118 to .312") Pitch