

FEATURES AND SPECIFICATIONS

Features and Benefits

- Dual opposing beam contact
- Flux-proof option
- Solder tails for 1.6mm (.062") PCBs

Reference Information

Product Specification: PS-85052-0001
 Packaging: Box
 UL File No.: E29179
 CSA File No.: LR19980-390
 Mates With: [85011](#)—Straight male style Q/3

Electrical

Electrical Current: 1.5A
 Contact Resistance: 20mΩ max.

Mechanical

Mating Force: 0.93N max.

Physical


Housing: Glass-filled polyester, UL 94V-0
 Contact: Copper Alloy
 Operating Temperature: -55 to +125°C




2.54mm (.100") Pitch DIN 41612/IEC 603-2 Connector

85050

Female Style Q/3



CATALOG DRAWING (FOR REFERENCE ONLY)

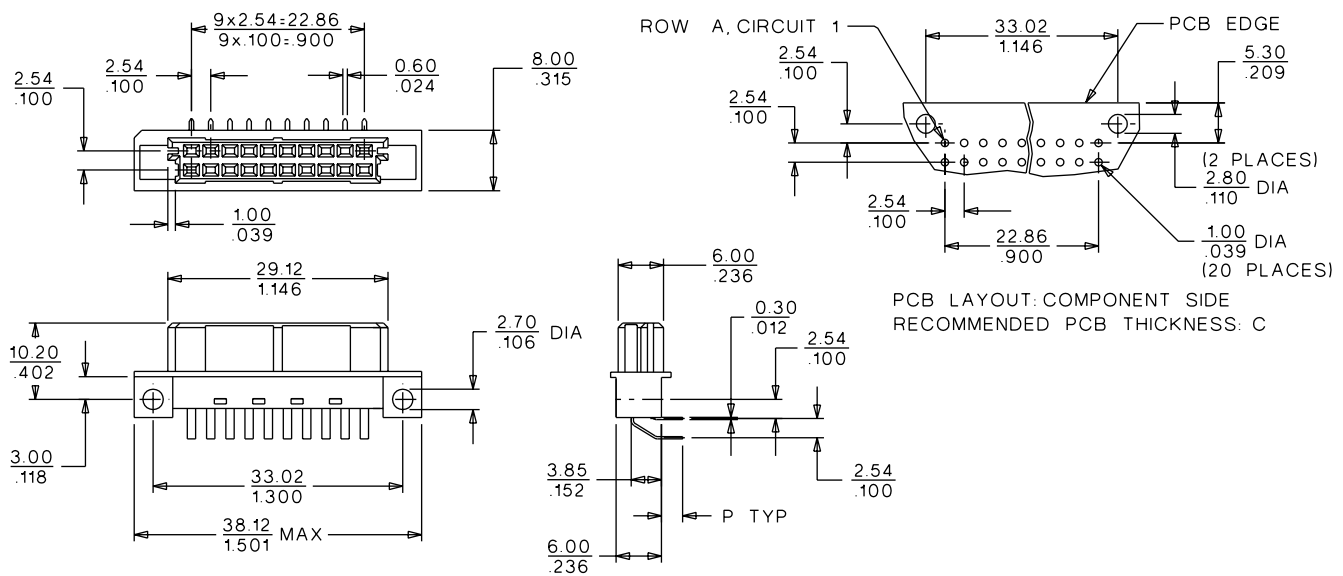

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.		Contact Loading	Rows	Solder Tail Dimension P
	Performance Level*				
	1	2			
20	85050-0050	85050-0086	Full	a, b	3.0 (.118)

For other versions contact Molex

* Performance levels based on test conditions per DIN 41612, part 5:

1: >500 mating cycles. 10 day industrial environment (S02)

2: >400 mating cycles. 4 day industrial environment (S02)

Backplane Connector Systems

