

Specifications

Current Rating: 1Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 300V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C





Materials

Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 注：此塑膠用於SMT型態的26~50PIN塑膠材質用LCP料生產，02~25PIN塑膠材質用PA6T料生產。

YA-V46X-2Xxx-LF
 LEADFREE

RoHS Compliant

Recommended P.C.Board
 Layout

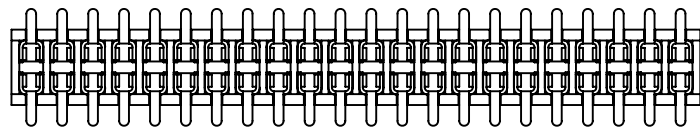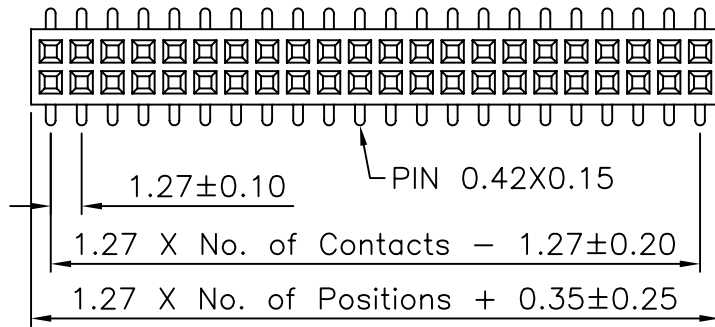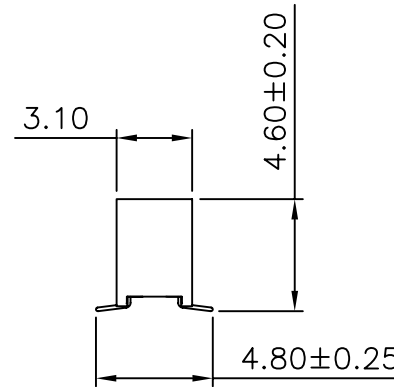

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. YA-V46X-2Xxx

DWG NO. YA-V46X-2Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 AWG

DESCRIPTION:

1.27 FEMALE HEADER DUAL ROWS SMT TYPE BASE 4.40H

AREA

REVISIONS

HK

DATE

焜倫股份有限公司