



NAIS

POWER PhotoMOS RELAYS 1-channel (Form A) Type


PhotoMOS RELAYS



mm inch



AC/DC type



DC type

FEATURES

1. High capacity PhotoMOS Relay in a compact and slim 4-pin SIL
2. Extremely low ON resistance
3. Control low-level signal
Power Photo MOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
4. Low-level off state leakage current
5. High I/O isolation voltage 2,500 V
6. Eliminates the need for a counter electromotive protection diode in the drive circuit on the input side
7. Eliminate the need for a power supply to drive the power MOSFET
8. PC board layout is simplified
9. No restriction on mounting direction
10. Varistor incorporated type is also available.

TYPICAL APPLICATIONS

- High-speed inspection machines
- IC checker
- NC machine, Robots
- Office machines
- Telecommunication
- Automotive
- Industrial control

TYPES

1. AC/DC type

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	3.0 A	AQZ202	25 pcs.	500 pcs.
100 V	2.0 A	AQZ205		
200 V	1.0 A	AQZ207		
400 V	0.5 A	AQZ204		

2. DC type

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	4.0 A	AQZ102	25 pcs.	500 pcs.
100 V	2.6 A	AQZ105		
200 V	1.3 A	AQZ107		
400 V	0.7 A	AQZ104		

Notes: Load voltage and current of AC/DC type: Peak AC/DC.
Load voltage and current of DC type: DC

RATING

1. AC/DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ202	AQZ205	AQZ207	AQZ204	Remarks
Input	LED forward current	I_F	50 mA				
	LED reverse voltage	V_R	3 V				
	Peak forward current	I_{FP}	1 A				$f = 100$ Hz, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW				
Output	Load voltage (Peak AC)	V_L	60 V	100 V	200 V	400 V	
	Continuous load current	I_L	3.0 A	2.0 A	1.0 A	0.5 A	
	Peak load current	I_{peak}	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), $V_L = DC$
	Power dissipation	P_{out}	1.6 W				
Total power dissipation		P_T	1.6 W				
I/O isolation voltage		V_{iso}	2,500 V AC				
Temperature limits	Operating	T_{opr}	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
	Storage	T_{stg}	-40°C to +100°C -40°F to +212°F				


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQZ202	AQZ205	AQZ207	AQZ204	Condition		
Input	LED operate current	Typical	I _{Fon}	1.0 mA				I _L = 100 mA		
		Maximum		3.0 mA				V _L = 10 V		
	LED turn off current	Minimum	I _{Foff}	0.4 mA				I _L = 100 mA		
		Typical		0.9 mA				V _L = 10 V		
	LED dropout voltage	Typical	V _F	1.16 V (1.25 V at I _F = 50 mA)				I _F = 10 mA		
		Maximum		1.5 V						
Output	On resistance	Typical	R _{on}	0.11 Ω	0.23 Ω	0.7 Ω	2.1 Ω	I _F = 10 mA I _L =Max. Within 1 s on time		
		Maximum		0.18 Ω	0.34 Ω	1.1 Ω	3.2 Ω			
	Off state leakage current	Maximum	—	10 μA				I _F = 0 V _L = Max.		
Transfer characteristics	Switching speed	Turn on time*	Typical	T _{on}	2.46 ms	2.40 ms	1.12 ms	1.65 ms	I _F = 10 mA I _L = 100 mA V _L = 10 V	
			Maximum		5.0 ms					
			Typical		5.64 ms	5.65 ms	2.57 ms	3.88 ms	I _F = 5 mA I _L = 100 mA V _L = 10 V	
			Maximum		10.0 ms					
		Turn off time*	Typical	T _{off}	0.22 ms	0.21 ms	0.10 ms	0.08 ms	I _F = 5 mA or 10 mA I _L = 100 mA V _L = 10 V	
			Maximum		3.0 ms					
		I/O capacitance		Typical	C _{iso}	0.8 pF				f = 1 MHz V _B = 0
				Maximum		1.5 pF				
	Initial I/O isolation resistance		Minimum	R _{iso}	1,000 MΩ				500 V DC	
	Maximum operating speed		Maximum	—	0.5 cps				I _F = 10 mA Duty factor = 50% I _L = Max., V _L = Max.	
	Vibration resistance		Minimum	—	10 to 55 Hz at double amplitude of 3 mm				2 hours for 3 axes	
Shock resistance		Minimum	—	4,900 m/s ² {500 G} 1 ms				3 times for 3 axes		

Note: Recommendable LED forward current $I_F = 5$ to 10 mA.

For type of connection, see page 35.

*Turn on/off time

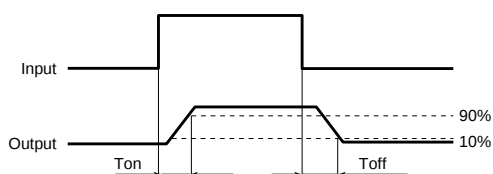

AQZ10○, 20○

2. DC type

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item		Symbol	AQZ102	AQZ105	AQZ107	AQZ104	Remarks
Input	LED forward current	I_F	50 mA				
	LED reverse voltage	V_R	3 V				
	Peak forward current	I_{FP}	1 A				$f = 100 \text{ Hz}$, Duty factor = 0.1%
	Power dissipation	P_{in}	75 mW				
Output	Load voltage (DC)	V_L	60 V	100 V	200 V	400 V	
	Continuous load current (DC)	I_L	4.0 A	2.6 A	1.3 A	0.7 A	
	Peak load current	I_{peak}	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), $V_L = \text{DC}$
	Power dissipation	P_{out}	1.35 W				
	Total power dissipation	P_T	1.35 W				
I/O isolation voltage		V_{iso}	2,500 V AC				
Temperature limits	Operating	T_{opr}	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
	Storage	T_{stg}	-40°C to +100°C -40°F to +212°F				


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQZ102	AQZ105	AQZ107	AQZ104	Condition		
Input	LED operate current	Typical	I _{Fon}	1.0 mA				I _L = 100 mA V _L = 10 V		
		Maximum		3.0 mA						
	LED turn off current	Minimum	I _{Off}	0.4 mA				I _L = 100 mA V _L = 10 V		
		Typical		0.9 mA						
	LED dropout voltage	Typical	V _F	1.16 V (1.25 V at I _F = 50 mA)				I _F = 10 mA		
		Maximum		1.5 V						
Output	On resistance	Typical	R _{on}	0.05 Ω	0.081 Ω	0.34 Ω	1.06 Ω	I _F = 10 mA I _L =Max. Within 1 s on time		
		Maximum		0.09 Ω	0.17 Ω	0.55 Ω	1.6 Ω			
	Off state leakage current	Maximum	—	10 μA				I _F = 0 V _L = Max.		
Transfer characteristics	Switching speed	Turn on time*	Typical	T _{on}	1.66 ms	1.89 ms	0.83 ms	1.01 ms	I _F = 10 mA I _L = 100 mA V _L = 10 V	
			Maximum		5.0 ms					
			Typical		3.79 ms	4.50 ms	1.75 ms	2.34 ms		I _F = 5 mA I _L = 100 mA V _L = 10 V
			Maximum		10.0 ms					
	Turn off time*	Typical	T _{off}	0.15 ms	0.19 ms	0.08 ms	0.08 ms	I _F = 5 mA or 10 mA I _L = 100 mA V _L = 10 V		
		Maximum		3.0 ms						
	I/O capacitance	Typical	C _{iso}	0.8 pF				f = 1 MHz V _B = 0		
		Maximum		1.5 pF						
	Initial I/O isolation resistance		Minimum	R _{iso}	1,000 MΩ				500 V DC	
	Maximum operating speed		Maximum	—	0.5 cps				I _F = 10 mA Duty factor = 50% I _L ×V _L = 200 (VA)	
Vibration resistance		Minimum	—	10 to 55 Hz at double amplitude of 3 mm				2 hours for 3 axes		
Shock resistance		Minimum	—	4,900 m/s ² {500 G} 1 ms				3 times for 3 axes		

Note: Recommendable LED forward current $I_F = 5$ to 10 mA.

For type of connection, see page 35.

*Turn on/off time

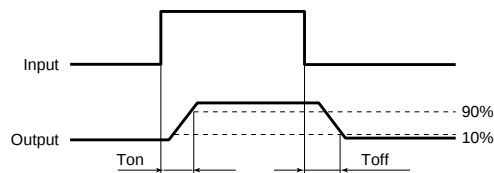


- For Dimensions, see Page 29.
- For Schematic and Wiring Diagrams, see Page 35.
- For Cautions for Use, see Page 40.

REFERENCE DATA


1.-(1) Load current vs. ambient temperature characteristics (AC/DC type)

Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

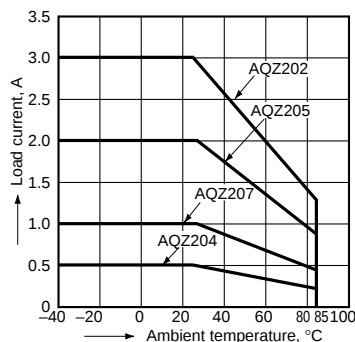


1.-(2) Load current vs. ambient temperature characteristics (DC type)

Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

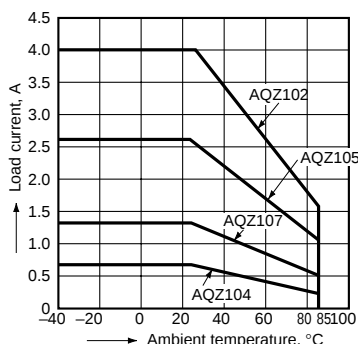


2. Load current vs. ambient temperature characteristics in adjacent mounting

I_L : Load current;
 $I_L(\text{max.})$: Maximum continuous load current

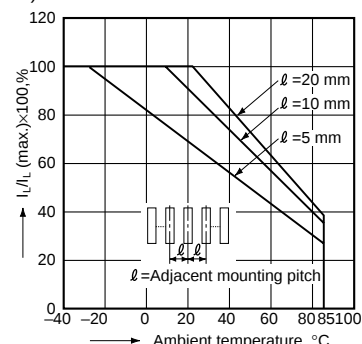


3.-(1) On resistance vs. ambient temperature characteristics

LED current: 10 mA;
 Continuous load current: 1.2 A (DC) (AQZ202),
 0.8 A (DC) (AQZ205),
 1.6 A (DC) (AQZ102),
 1.04 A (DC) (AQZ105)

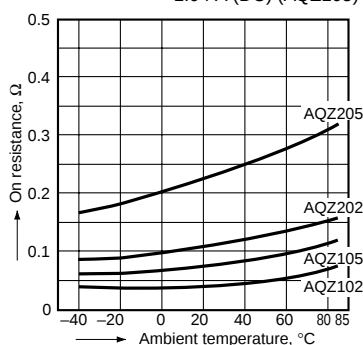


3.-(2) On resistance vs. ambient temperature characteristics

LED current: 10 mA;
 Continuous load current: 0.4 A (DC) (AQZ207),
 0.2 A (DC) (AQZ204),
 0.52 A (DC) (AQZ107),
 0.28 A (DC) (AQZ104)

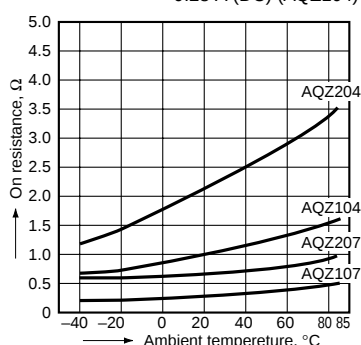


4.-(1) Turn on time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

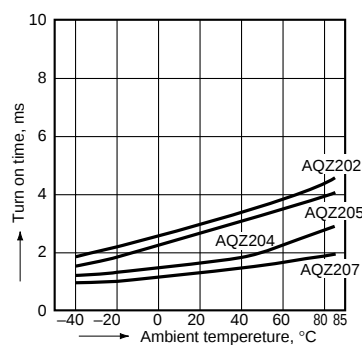


4.-(2) Turn on time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)




5.-(1) Turn off time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

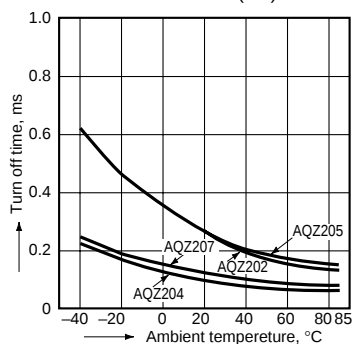


5.-(2) Turn off time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;
 Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

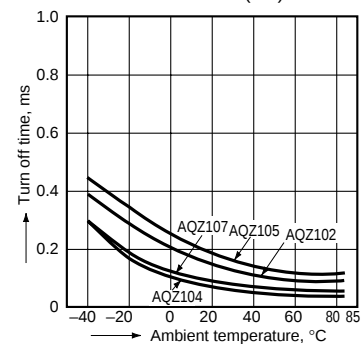


6.-(1) LED operate vs. ambient temperature characteristics (AC/DC type)

Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

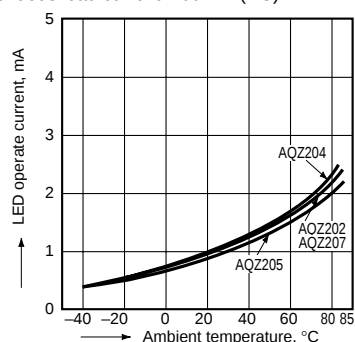


6.-(2) LED operate vs. ambient temperature characteristics (DC type)

Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

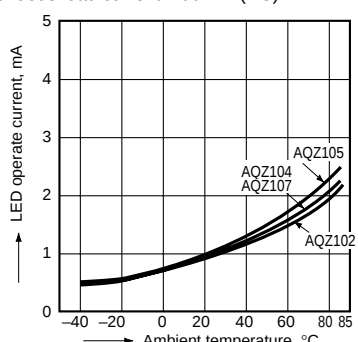

7.-(1) LED turn off current vs. ambient temperature characteristics (AC/DC type)


Load voltage: 10 V (DC);
 Continuous load current: 100 mA (DC)

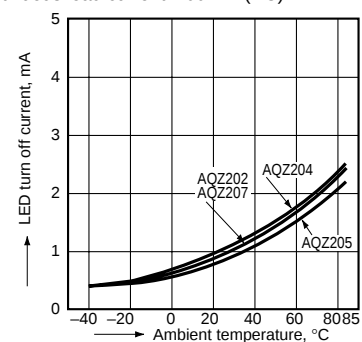

AQZ10○, 20○


7.-(2) LED turn off current vs. ambient temperature characteristics (DC type)

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC)




8. LED dropout voltage vs. ambient temperature characteristics

Sample: all types; LED current: 5 to 50 mA

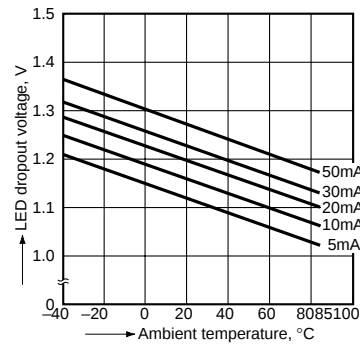


9.-(1) Voltage vs. current characteristics of output at MOS portion (AC/DC type)

Ambient temperature: 25°C 77°F




9.-(2) Voltage vs. current characteristics of output at MOS portion (DC type)

Ambient temperature: 25°C 77°F




10. Off state leakage current

Ambient temperature: 25°C 77°F

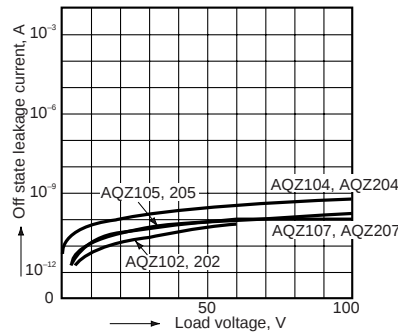


11.-(1) LED forward current vs. turn on time characteristics (AC/DC type)

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

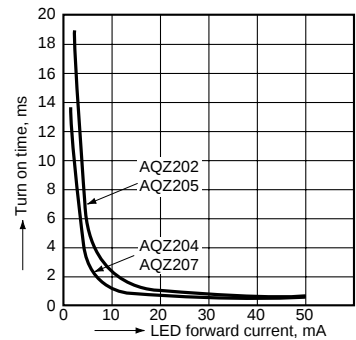


11.-(2) LED forward current vs. turn on time characteristics (DC type)

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F




12.-(1) LED forward current vs. turn off time characteristics (AC/DC type)

Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

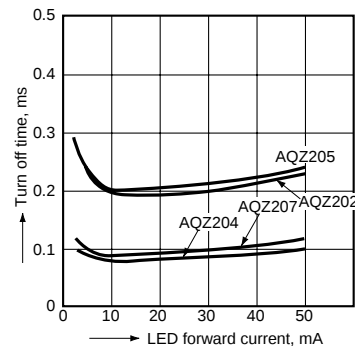


12.-(2) LED forward current vs. turn off time characteristics (DC type)

Measured portion: between terminals 4 and 6;
Load voltage: 10 V (DC);
Continuous load current: 100 mA (DC);
Ambient temperature: 25°C 77°F

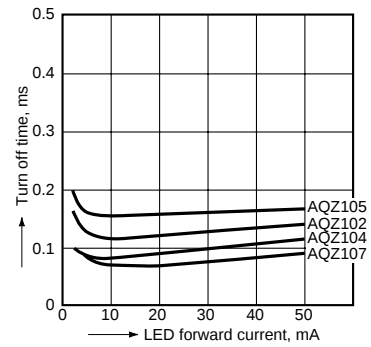


13.-(1) Load voltage vs. turn on time characteristics (Load voltage: 60, 100 V type)

LED current: 10 mA;
Continuous load current: 100 mA;
Ambient temperature: 25°C 77°F

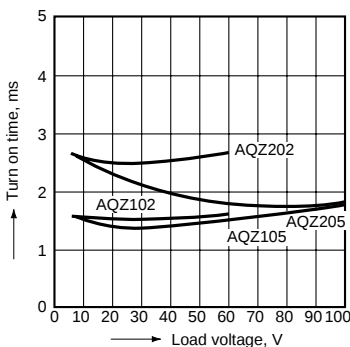


13.-(2) Load voltage vs. turn on time characteristics (Load voltage: 200, 400 V type)

LED current: 10 mA;
Continuous load current: 100 mA;
Ambient temperature: 25°C 77°F

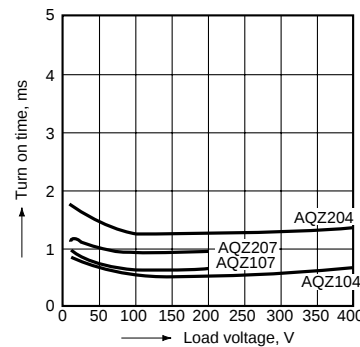


14.-(1) Load current vs. turn on time characteristics (Load voltage: 60, 100 V type)

LED current: 10 mA;
Load voltage: 10 V (DC);
Ambient temperature: 25°C 77°F

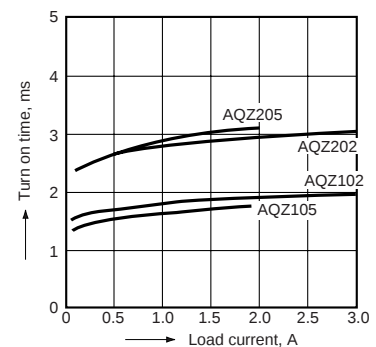


14.-(2) Load current vs. turn on time characteristics (Load voltage: 200, 400 V type)

LED current: 10 mA;
Load voltage: 10 V (DC);
Ambient temperature: 25°C 77°F

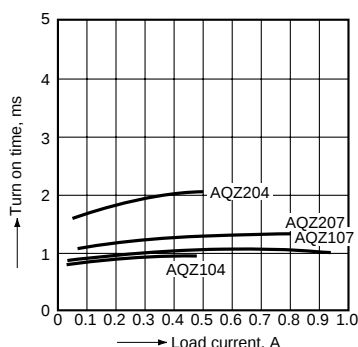


15.-(1) Load voltage vs. turn off time characteristics (Load voltage: 60, 100 V type)

LED current: 10 mA;
Continuous load current: 100 mA;
Ambient temperature: 25°C 77°F

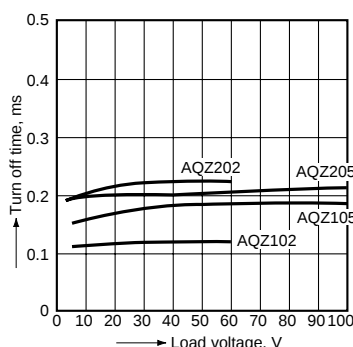


15.-(2) Load voltage vs. turn off time characteristics (Load voltage: 200, 400 V type)

LED current: 10 mA;
Continuous load current: 100 mA;
Ambient temperature: 25°C 77°F

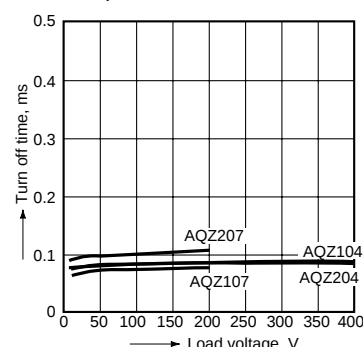


16.-(1) Load current vs. turn off time characteristics (Load voltage: 60, 100 V type)

LED current: 10 mA;
Load voltage: 10 V (DC);
Ambient temperature: 25°C 77°F

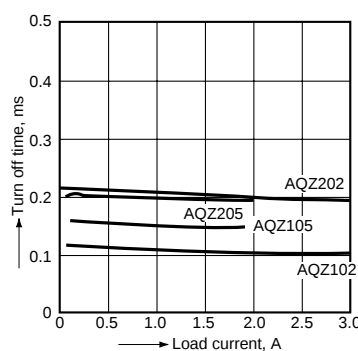


16.-(2) Load current vs. turn off time characteristics (Load voltage: 200, 400 V type)

LED current: 10 mA;
Load voltage: 10 V (DC);
Ambient temperature: 25°C 77°F

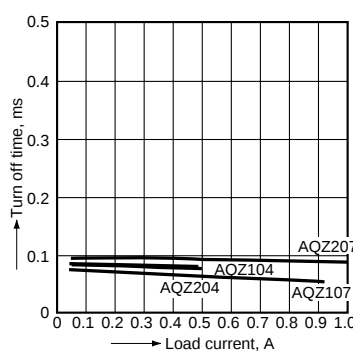


17. Maximum operating frequency vs. load voltage/current characteristics

LED current: 10 mA;
Ambient temperature: 25°C 77°F

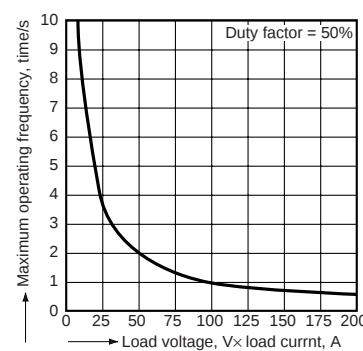


18.-(1) Applied voltage vs. output capacitance characteristics (AC/DC type)

Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

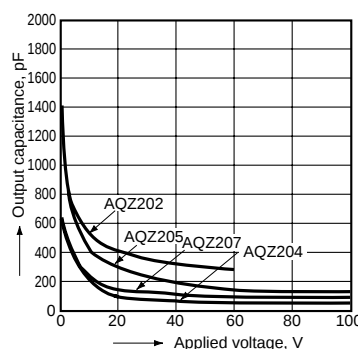



18.-(2) Applied voltage vs. output capacitance characteristics (DC type)

Frequency: 1 MHz;
Ambient temperature: 25°C 77°F


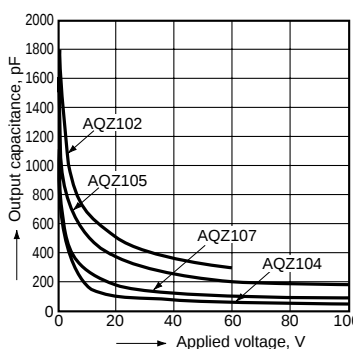


ACCESSORY

Socket




PA1a-PS




PA1a-PS-H

PC board pattern (BOTTOM VIEW) Standard type



Self clinching type



Tolerance: $\pm 0.1 \pm .004$