



NESSCAP® Ultracapacitor Products 48V MODULES

Features

- 48V modules with rated capacitance of 36F, 66F, 88F, 111F and 166F
- Highest power performance with ultra-low internal resistance
- Integrated UMU (Ultracapacitor Management Unit) for:
 - Individual cell balancing
 - Voltage and temperature diagnosis by logic output
 - Optional CAN or RS communication interface
- Rugged design for harsh environments
- Typical applications:
 - Transportation and automotive
 - Industrial, UPS, DVR, and telecommunications



Specifications

Rated Capacitance (F)	Internal Resistance (mΩ)		Max Current ¹ (A)	Leakage Current (mA)	Stored Energy (Wh)	Specific Energy (Wh/kg)	Nominal Weight (kg)	Part Number
Discharge with constant current at 25°C	AC (100Hz)	DC	1 sec discharge rate to 1/2V _R	72 hours at 25°C	at V _R	Gravimetric		
36	< 10.8	< 13.0	580	< 1.5	11.8	1.38	8.5	EMHSR-0036C0-048R0S
66	< 8.6	< 10.4	920	< 2.7	21.7	2.17	10.0	EMHSR-0066C0-048R0S
88	< 7.3	< 8.9	1,160	< 3.0	28.9	2.51	11.5	EMHSR-0088C0-048R0S
111	< 6.0	< 7.1	1,460	< 4.2	36.4	2.91	12.5	EMHSR-0111C0-048R0S
166	< 4.8	< 5.6	2,030	< 5.2	54.5	3.63	15.0	EMHSR-0166C0-048R0S

Rated Voltage, V _R		48.6V DC	
Surge Voltage		51.3V DC	
Capacitance Tolerance		0% / +20%	
Operating Temperature Range		-40 ~ 65°C	ΔCAP < 5% and ΔESR < 150% of initial value measured at 25°C
Storage Temperature Range		-40 ~ 70°C	
Lifetime	Endurance	1,500 hours at V _R and 65°C	ΔCAP < 20% and ΔESR < 60% of specified value
	At Room Temperature	10 years ² at V _R	ΔCAP < 30% and ΔESR < 150% of specified value
Cycle Life		1,000,000 cycles between V _R and 1/2V _R using constant current charge and discharge at 25°C	ΔCAP < 30% and ΔESR < 150% of specified value
Electronics (Ultracapacitor Management Unit)	Balancing	Active Balancing	
	Monitoring	Over Voltage : High and Low signal Temperature : NTC	Requires external 5V DC input, configurable to user specific requirements
	Communications	High/Low Logic signal Optional CAN 2.0B, J1939 or RS485 interface	
	Signal Output	4 pin connector	
Enclosure	Output Terminals	M8 screw holes	
	Insulation Coordination	Rated insulation voltage : 1kV DC Or 2.8kV AC (50Hz, 10sec) Rated impulse withstand voltage : 6kV DC	IEC 61287-1 (Cat. : OV II)
	Protection Degree	IP 65 (Dust-tight and protected against water jets)	IEC 60529
	Vibration & Shock Resistance	SAE J2380 : Vibration SAE J2464 : Shock	
	Mounting	8 locations, M8 holes on top and bottom covers	

1 – Warning: this value should not be used as continuous current


2 – Lifetime at room temperature is a provisional value

© NESSCAP 2010. All rights reserved. Design and specifications subject to change without notice.

Nesscap, Co., Ltd.
 (446-901) 750-8 Gomae-dong, Giheung-gu, Yongin-si, Gyeonggi-do, South Korea
 Tel: +82-31-289-0721 Fax: +82-31-286-6767 E-mail: marketing@nesscap.com
 Web: www.nesscap.com

ISO 9001, 14001, and TS 16949 certified

Dimensions

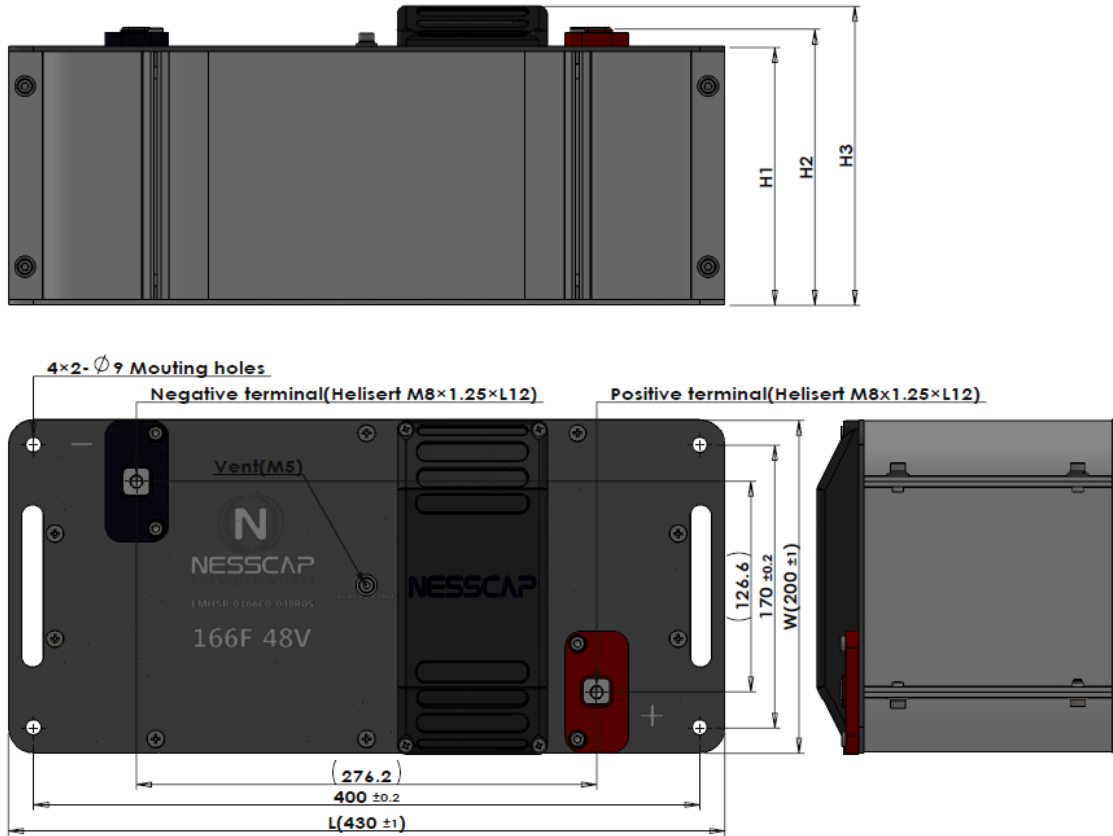

Part Number	Capacitance (F)	Dimensions (mm)				
		L(± 2.0)	W(± 1.0)	H1(Max)	H2(Max)	H3(Max)
EMHSR-0036C0-048R0S	36	430	200	68.5	80.5	93.5
EMHSR-0066C0-048R0S	66	430	200	91	103	116
EMHSR-0088C0-048R0S	88	430	200	102	114	127
EMHSR-0111C0-028R0S	111	430	200	119	131	144
EMHSR-0166C0-048R0S	166	430	200	155	168	180