
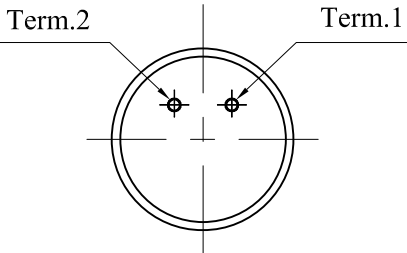

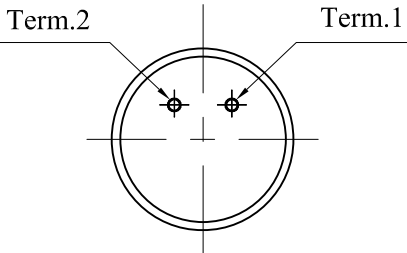

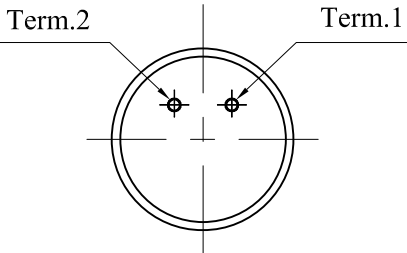
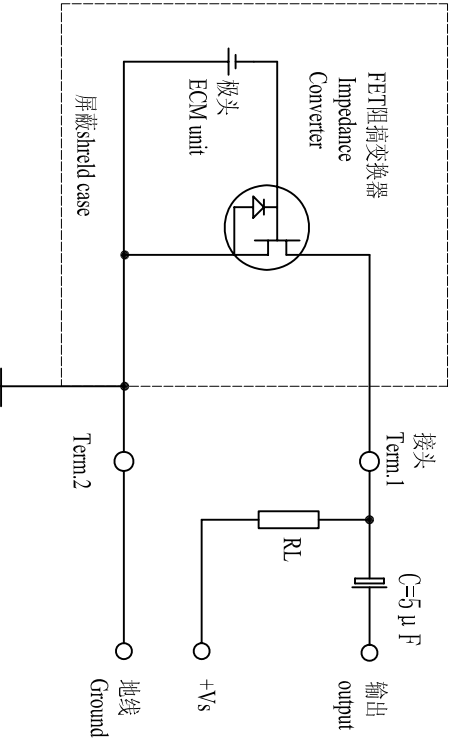


	1	2	3	4	5	6	7	8																																																																																
A	<table><tr><td>编号 NO.</td><td>项目 Items</td><td>规格 Specifications</td></tr><tr><td>1</td><td>额定电压 Rated Voltage</td><td>4.5V</td></tr><tr><td>2</td><td>工作电压 Operating Voltage</td><td>1.5V~10V</td></tr><tr><td>3</td><td>灵敏度 Sensitivity</td><td>-42±2dB at 1KHz(0dB=1V/μPa) -62±2dB at 1KHz(0dB=1V/μbar)</td></tr><tr><td>4</td><td>消耗电流 Current Consumption</td><td>0.5mA Max</td></tr><tr><td>5</td><td>频率范围 Frequency</td><td>100~16,000Hz</td></tr><tr><td>6</td><td>信噪比 S/N Ratio</td><td>≥60dB</td></tr><tr><td>7</td><td>灵敏度减低 Sensitivity Reduction</td><td>within-3dB at 1.5V</td></tr><tr><td>8</td><td>方向性 Directivity</td><td>Omnidirectional</td></tr><tr><td>9</td><td>测试条件 Testing Condition</td><td>1000Hz, Vs=4.5V, RL=2.2K Ω</td></tr><tr><td>10</td><td>壳体材料/颜色 Shell Material/Color</td><td>AL/Silver</td></tr><tr><td>11</td><td>工作温度 Operating Temperature</td><td>-25~+55 °C</td></tr><tr><td>12</td><td>贮存温度 Store Temperature</td><td>-25~+55 °C</td></tr><tr><td>13</td><td>重量 Weight</td><td>0.1g</td></tr><tr><td>备注 Note:</td><td colspan="2"></td></tr></table>								编号 NO.	项目 Items	规格 Specifications	1	额定电压 Rated Voltage	4.5V	2	工作电压 Operating Voltage	1.5V~10V	3	灵敏度 Sensitivity	-42±2dB at 1KHz(0dB=1V/μPa) -62±2dB at 1KHz(0dB=1V/μbar)	4	消耗电流 Current Consumption	0.5mA Max	5	频率范围 Frequency	100~16,000Hz	6	信噪比 S/N Ratio	≥60dB	7	灵敏度减低 Sensitivity Reduction	within-3dB at 1.5V	8	方向性 Directivity	Omnidirectional	9	测试条件 Testing Condition	1000Hz, Vs=4.5V, RL=2.2K Ω	10	壳体材料/颜色 Shell Material/Color	AL/Silver	11	工作温度 Operating Temperature	-25~+55 °C	12	贮存温度 Store Temperature	-25~+55 °C	13	重量 Weight	0.1g	备注 Note:																																					
编号 NO.	项目 Items	规格 Specifications																																																																																						
1	额定电压 Rated Voltage	4.5V																																																																																						
2	工作电压 Operating Voltage	1.5V~10V																																																																																						
3	灵敏度 Sensitivity	-42±2dB at 1KHz(0dB=1V/μPa) -62±2dB at 1KHz(0dB=1V/μbar)																																																																																						
4	消耗电流 Current Consumption	0.5mA Max																																																																																						
5	频率范围 Frequency	100~16,000Hz																																																																																						
6	信噪比 S/N Ratio	≥60dB																																																																																						
7	灵敏度减低 Sensitivity Reduction	within-3dB at 1.5V																																																																																						
8	方向性 Directivity	Omnidirectional																																																																																						
9	测试条件 Testing Condition	1000Hz, Vs=4.5V, RL=2.2K Ω																																																																																						
10	壳体材料/颜色 Shell Material/Color	AL/Silver																																																																																						
11	工作温度 Operating Temperature	-25~+55 °C																																																																																						
12	贮存温度 Store Temperature	-25~+55 °C																																																																																						
13	重量 Weight	0.1g																																																																																						
备注 Note:																																																																																								
B	<table><tr><td></td><td></td></tr></table>																																																																																							
																																																																																								
C	原理图																																																																																							
D																																																																																								
E																																																																																								
F	<table><tr><td>△</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>△</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>NO.</td><td>DATE</td><td>REVISION</td><td>REFERENCE DWG</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>1</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>								△									△									△									△									NO.	DATE	REVISION	REFERENCE DWG						1																																		
△																																																																																								
△																																																																																								
△																																																																																								
△																																																																																								
NO.	DATE	REVISION	REFERENCE DWG																																																																																					
1																																																																																								
	<table><tr><td colspan="4">TOLERANCES UNLESS NOTED OTHERWISE</td><td colspan="4">CUSTOMER</td></tr><tr><td colspan="2">DRAWN</td><td colspan="2"></td><td colspan="2">KEPO MODEL NO.</td><td colspan="2"></td></tr><tr><td colspan="2">DESIGN</td><td colspan="2"></td><td colspan="2">KPCM-60H22P-2V4.5</td><td colspan="2">CUSTOMER NO.</td></tr><tr><td colspan="2">CHECKED</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2">APPROVED</td><td colspan="2"></td><td colspan="2">DWG NO.</td><td colspan="2"></td></tr><tr><td colspan="2">DATE</td><td colspan="2">05.11.08</td><td colspan="2"></td><td colspan="2">VER</td></tr><tr><td colspan="2">CONTRACT NO.</td><td colspan="2"></td><td colspan="2">KF3.002.013</td><td colspan="2">UNIT</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">mm</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2">SHEET</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr></table>								TOLERANCES UNLESS NOTED OTHERWISE				CUSTOMER				DRAWN				KEPO MODEL NO.				DESIGN				KPCM-60H22P-2V4.5		CUSTOMER NO.		CHECKED								APPROVED				DWG NO.				DATE		05.11.08				VER		CONTRACT NO.				KF3.002.013		UNIT								mm								SHEET									
TOLERANCES UNLESS NOTED OTHERWISE				CUSTOMER																																																																																				
DRAWN				KEPO MODEL NO.																																																																																				
DESIGN				KPCM-60H22P-2V4.5		CUSTOMER NO.																																																																																		
CHECKED																																																																																								
APPROVED				DWG NO.																																																																																				
DATE		05.11.08				VER																																																																																		
CONTRACT NO.				KF3.002.013		UNIT																																																																																		
						mm																																																																																		
						SHEET																																																																																		
	<table><tr><td colspan="4">FIRST ANGLE PROJECTION</td><td colspan="4">KEPO CO., LTD.</td></tr><tr><td colspan="4"></td><td colspan="4">TEL: (+86)574-88570330</td></tr><tr><td colspan="4">AGENCY APPROVAL</td><td colspan="4">FAX: (+86)574-88570329</td></tr></table>								FIRST ANGLE PROJECTION				KEPO CO., LTD.								TEL: (+86)574-88570330				AGENCY APPROVAL				FAX: (+86)574-88570329																																																											
FIRST ANGLE PROJECTION				KEPO CO., LTD.																																																																																				
				TEL: (+86)574-88570330																																																																																				
AGENCY APPROVAL				FAX: (+86)574-88570329																																																																																				