# SPECIFICATION

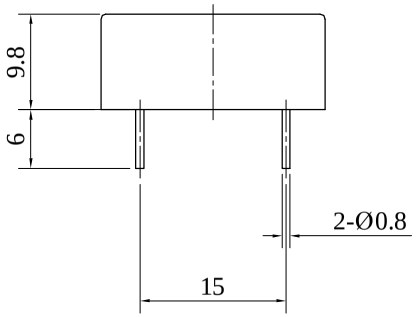


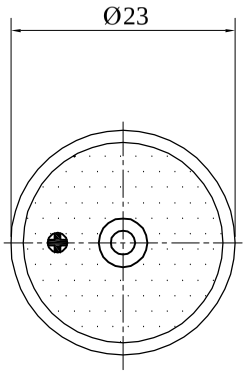


1.Rated Voltage .....12VDC
2.Operating Voltage .....3~24VDC
3.Max.Rated Current .....10mA/12VDC
4.Resonant Frequency .....3.5±0.5KHz
5.Min.Sound Pressure Level.....85dB12VDC/30cm
6.Tone Nature .....Continuous
7.Case Material .....PC
8.Operating Temperature .....-20～+70℃
9.Store Temperature .....-30～+80℃
10.Weight .....4g

| No. | DESCRIPTION | APPROVED | DATE |
|---|---|---|---|
| | | | |
| | | | |
| | | | |

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2.° ANGLES -1.°
FIRST ANGLE PROJECTION

| APPROVALS | DATE |
|---|---|
| DRAWN | |
| CHECKED | |
| APPROVED | 05.01.05 |

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Piezo Buzzer
KPI-2610

| UNIT | DWG NO. | |
|---|---|---|
| mm | KP3.840.013 | |
| SCALE NOT TO SCALE | SHEET | VER 1.0 |