
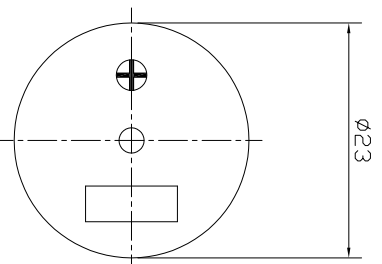
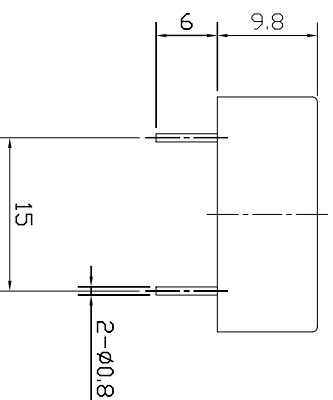


SPECIFICATION

- 1. Rated Voltage 24VDC
- 2. Operating Voltage 15~30VDC
- 3. Max. Rated Current 18mA at 24VDC
- 4. Resonant Frequency 3.5±0.5KHz
- 5. Min. Sound Pressure Level..... 80dB at 24VDC/30cm
- 6. Tone Nature Continuous
- 7. Case Material ABS
- 8. Operating Temperature -20~+60°C
- 9. Store Temperature -30~+70°C
- 10. Weight 4g



Compliance with ROHS			
KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
No.	DESCRIPTION	APPROVED	DATE
NINGBO KEPO ELECTRONIC CO.,LTD X XX # 90° FORMED ±2° FIRST ANGLE PROJECTION		DRAWN	
		CHECKED	
		APPROVED	07.12.17
		SCALE	NOT TO SCALE
		UNIT	mm
		DWG NO.	KP3.840.013.08R
		SHEET	VER. 1.0
		Piezo Buzzer	KPI-G2610A-24