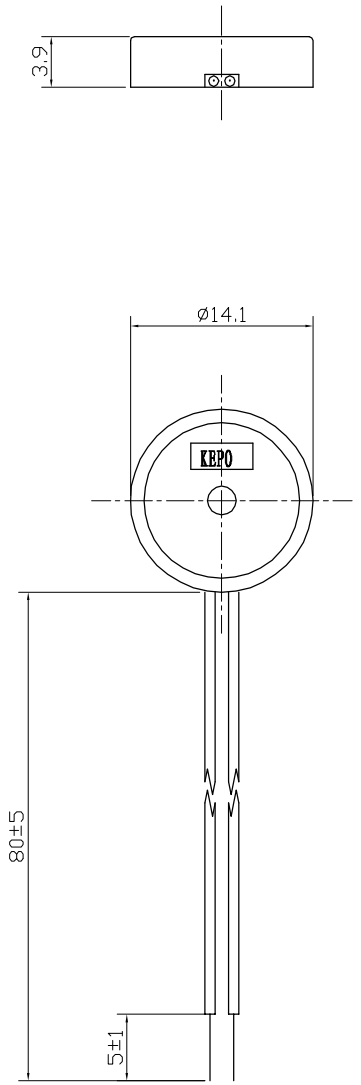

SPECIFICATION

1.Rated Voltage .....12Vp-p Square Wave
2.Max.Allowable Voltage .....25Vp-p Square Wave
3.Max.Rated Current .....2mA at 4.0KHz/12Vp-p Square Wave
4.Resonant Frequency .....4.0±0.5KHz
5.Min.Sound Pressure Level.....75dB at 4.0KHz/12Vp-p Square Wave/10cm
6.Capacitance at 120Hz .....15000pF±30%
7.Case Material .....ABS
8.Operating Temperature .....-20 ~ +60℃
9.Store Temperature .....-30 ~ +70℃
10.Weight 1.3g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED ±2.°
ANGLES ±1.°
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	05.01.28

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Piezo Transducer
KPR-1440

UNIT	DWG NO.	
mm	KP3.840.303	
SCALE	SHEET	VER 1.0