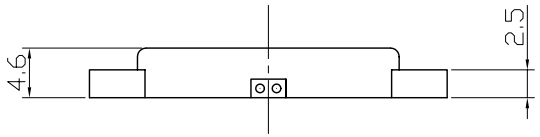

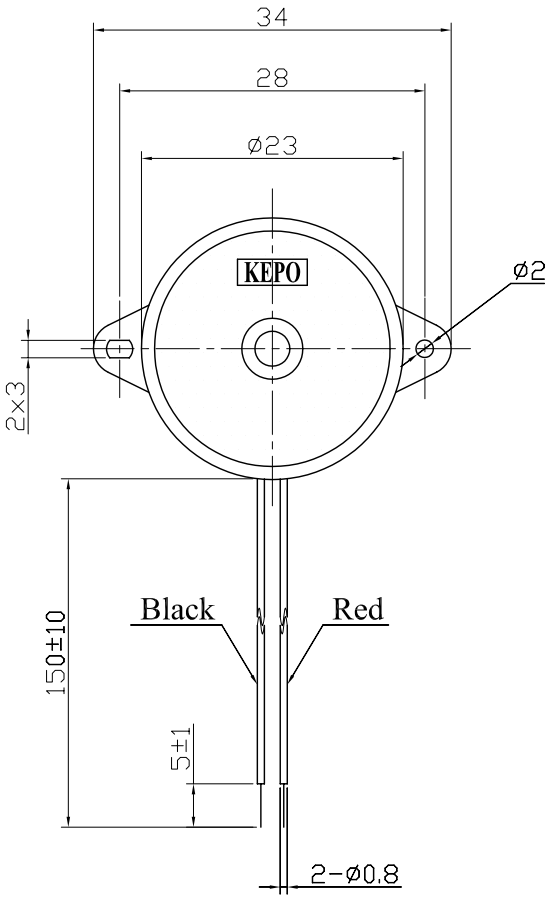

SPECIFICATION

1.Rated Voltage .....12Vp-p Square Wave
2.Max.Allowbale Voltage .....30Vp-p Square Wave
3.Max.Rated Current .....3mA at4.0KHz/12Vp-p Square Wave
4.Min.Sound Pressure Level.....80dB at 4.0KHz/12Vp-p Square Wave/30cm
5.Capacitance at 120Hz .....24000pF±30%
6.Resonant Frequency .....4.0±0.5KHz.
7.Case Material.....ABS
8.Operating Temperature .....-20～+60℃
9.Store Temperature .....-30～+70℃
10.Weight 1g

No.	DESCRIPTION	APPROVED	DATE

TOLERANCES UNLESS NOTED OTHERWISE
.X ±
.XX ±
.XXX ±
90° FORMED +2° -1° ANGLES
FIRST ANGLE PROJECTION

APPROVALS	DATE
DRAWN	
CHECKED	
APPROVED	03.04.22

KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Piezo Transducer
KPR-2310

UNIT	DWG NO.	
mm	KP3.840.310	
SCALE NOT TO SCALE	SHEET	VER 1.0