
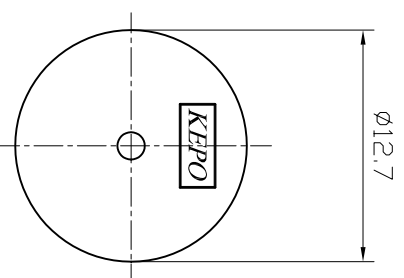


SPECIFICATIONS

1. Rated Voltage.....12Vp-p Square Wave
2. Operating Voltage.....3~30Vp-p Square Wave
3. Max. Rated Current.....4mA
4. Min. Sound Pressure Level.....80dB/10cm
5. Capacitance at 100Hz9500 ±30%/pF
6. Resonant Frequency.....4.0±0.5KHz
7. Shell Material/Color.....PC/Black
8. Operating Temperature.....-20~+80°C
9. Store Temperature.....-30~+100°C
10. Weight.....1.5g

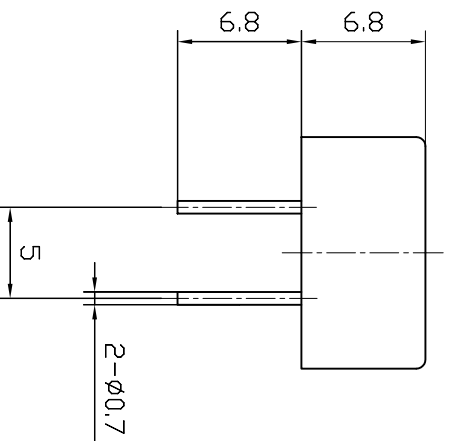

No.	DESCRIPTION	APPROVED	DATE	KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
TOLERANCES UNLESS NOTED OTHERWISE		APPROVALS	DATE		
mm	DRAWN	CHECKED			
XXX.X	APPROVED				
FIRST ANGLE PROJECTION 					
UNIT	DWG NO.	SCALE	SHEET	VER.	
mm	KPT-1340	NOT TO SCALE	KP3.840.202	12	