


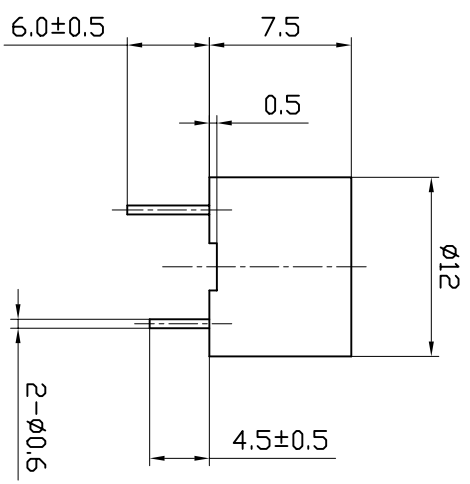


SPECIFICATION

- 1. Rated Voltage 12VDC
- 2. Operating Voltage 8~15VDC
- 3. Max. Rated Current 30mA/12VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 3100±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+70°C
- 9. Store Temperature -30~+80°C
- 10. Weight 2g



No.	DESCRIPTION	APPROVED	DATE	KEPO NINGBO KEEP IMPROVING ELECTRONIC CO.,LTD http://www.chinaacoustic.com
TOLERANCES UNLESS NOTED OTHERWISE	APPROVALS	DATE		
XXX ± .XXX	DRAWN			
90° ANGLES ± .2°	CHECKED			UNIT
FIRST ANGLE PROJECTION	APPROVED			mm
			03.11.01	DWG NO. KPX-1212B
				SCALE NOT TO SCALE
				SHRIB KPX.840.692
				VER. 1.2