

1

2

3

4

5

6

7

8

A


B

C

D

E

F

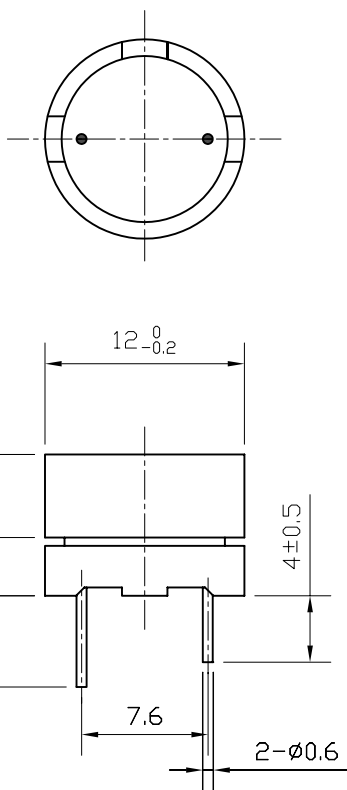

# SPECIFICATION

- 1. Rated Voltage .....12 VDC
- 2. Operating Voltage .....9~15VDC
- 3. Max. Rated Current .....30mA/12VDC
- 4. Min. Sound Pressure Level.....80dB/10cm
- 5. Response Time .....50ms
- 6. Tone Nature .....Pulse
- 7. Case Material .....PBT
- 8. Operating Temperature .....-20~+70℃
- 9. Store Temperature .....-30~+80℃
- 10. Weight .....2g

|  |             |           |      |   |                                  |
|--|-------------|-----------|------|---|----------------------------------|
|  |             |           |      | <b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD<br><a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a> |                                  |
|  |             |           |      | Magnetic Buzzer<br>KPX-1212C  |                                  |
| No.  | DESCRIPTION | APPROVED  | DATE |   |                                  |
| TOLERANCES UNLESS NOTED OTHERWISE<br>X ±<br>.XX ±<br>.XXX ±<br>90° FORMED ±15°<br>ANGLES -1° |             | APPROVALS |      | DATE  |                                  |
|  |             | DRAWN     |      | UNIT  | DWG NO.                          |
|  |             | CHECKED   |      | mm  | KP3.840.733                      |
| FIRST ANGLE PROJECTION   |             | APPROVED  |      | 04.10.28  | SCALE NOT TO SCALE SHEET VER 1.0 |

1

2

3

4

5

6

7

8