
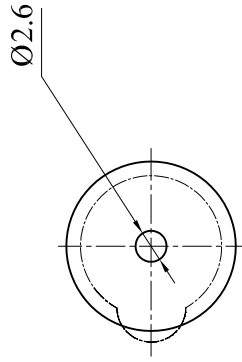

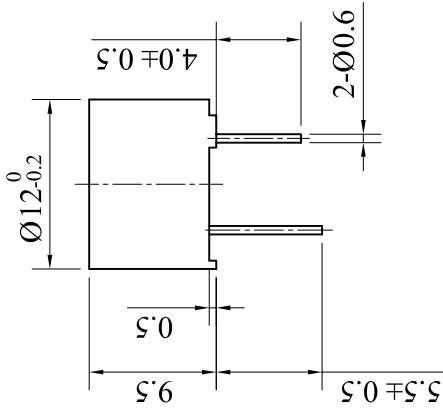


SPECIFICATION

1. Rated Voltage 5 VDC
2. Operating Voltage 4~8 VDC
3. Max. Rated Current 30mA/5VDC
4. Min. Sound Pressure Level 85dB/10cm
5. Resonant Frequency 2300±300Hz
6. Response Time 50ms
6. Case Material PBT
7. Operating Temperature -20~+70℃
8. Store Temperature -40~+100℃
9. Weight 2g



Compliance with ROHS			
KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
Magnetic Buzzer KPX-G1205A			
No.	DESCRIPTION	APPROVED	DATE
TOLERANCES UNLESS NOTED OTHERWISE: XX ± XXX ± 90° ANGLES ±° FIRST ANGLE PROJECTION		DRAWN	DATE
		CHECKED	
		APPROVED	
		UNIT	DWG. NO.
		SCALE	KP3.840.688R
		SHEET	VER 1.1
		NOT TO SCALE	8

A

B

C

D

E

F

1

2

3

4

5

6

7

8

A

B

C

D

E

F

1

2

3

4

5

6

7

8