

# SPECIFICATION


## 1. SCOPE

This specification is applied to the piezoelectric diaphragm.

## 2. SPECIFICATION

- 2.1 Resonant Frequency :  $3.0 \pm 0.5$  KHz
- 2.2 Resonant Resistace : 500 max
- 2.3 Capacitance : 30000 pF  $\pm 30\%$  at 100Hz
- 2.4 Input Voltage : 30 Vp-p max
- 2.5 Operating Temperature : -20 to +50
- 2.6 Storage Temperature : -20 to +70

## 3. DIMENSION as per figure

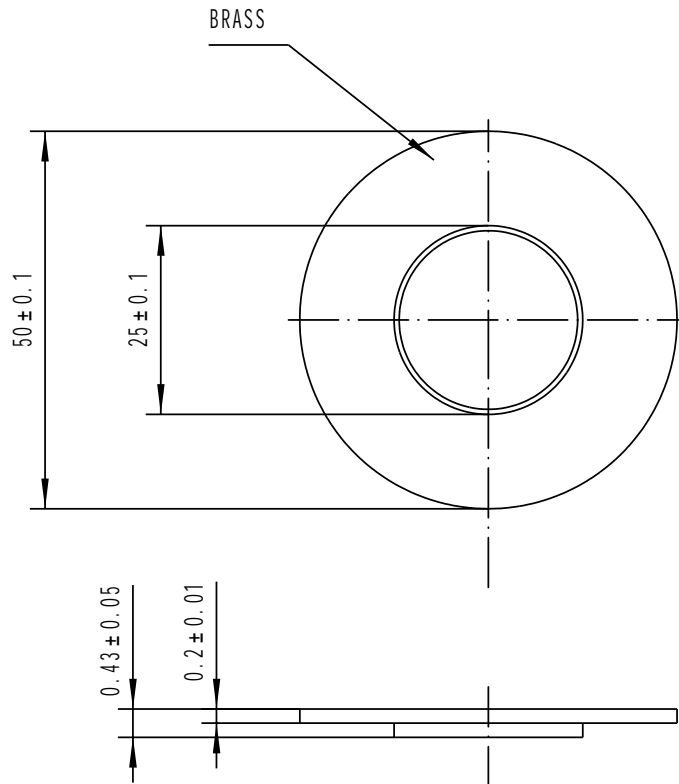

TOLERANCES UNLESS NOTED OTHERWISE .X ± .XX ± .XXX ± 90° FORMED +2° ANGLES -1°		SIGN	DATE	KEPO MODEL NO.	CUSTOMER	
	PREP.		01.07.12	MFT-50T-3.0A1	CUSTOMER NO.	
	ENG.			DWG NO.	REV	SHEET
	QA.			KP3.840.763	1.0	
	PROJ.			CONTRACT NO.	UNIT: mm	SCALE
FIRST ANGLE PROJECTION	AGENCY APPROVAL			KEPO CO.LTD.	TEL:(+86)574-88370330 FAX:(+86)574-88370329	

