



19.5×15.6×15.3

# NT73-2

CCC 03001003508

UL E158859 R50142718

## Features

- Small size, light weight, heavy reverse power.
- Low coil power consumption.
- PC board mounting.
- Suitable for automation control, telecommunication equipment, household electrical appliances and machinery electrical facilities.

## Ordering Information

NT73-2 D C S 10 DC12V 0.36

1 Part number: NT73-2  
 2 Terminals: NIL; standard D: double terminals  
 3 Contact arrangement: A:1A; B:1B; C:1C  
 4 Enclosure: S: Sealed type; NIL: Dust cover  
 5 Contact rating: 5A,10A,12A,15A/125VAC 28VDC; 6A/277VAC 20A/125VAC 16VDC/10A/250VAC (0.8W); T<sub>v</sub>:6A/250VAC 28VDC 6 Coil rated voltage(V): DC:3;5;6;9;12;24;48  
 7 Coil power consumption: 0.36;0.36W; 0.45;0.45W; 0.8;0.8W

## Contact Data

Contact Arrangement	1A (SPSTNO) , 1B (SPSTNC) , 1C (SPDT(B-M))
Contact Material	AgCdO AgSnO <sub>2</sub>
Contact Rating (resistive)	5A,6A,10A,12A/125VAC,28VDC;20A/125VAC,16VDC; 6A/250VAC,277VAC;10A,12A/250VAC; 15A/125VAC (15A 0.45W; 20A 0.8W coil only)
Max. Switching Power	420W 2500VA
Max. Switching Voltage	110VDC 380VAC
Contact Resistance or Voltage drop	<100mΩ
Operational	Electrical
Life	Mechanical

CAUTION: 1. For the intermediate current, it only applies to the room temperature.

## Coil Parameter

Dash numbers	Coil voltage		Coil resistance Ω ± 10%	Pickup VDC(max) (75% of rated voltage)	Release voltage VDC(min) (10% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
003-360	3	3.9	25	2.25	0.3	2.25	2.25	2.25
005-360	5	6.5	70	3.75	0.5	3.75	3.75	3.75
006-360	6	7.8	100	4.50	0.6	4.50	4.50	4.50
009-360	9	11.7	225	6.75	0.9	6.75	6.75	6.75
012-360	12	15.6	400	9.00	1.2	9.00	9.00	9.00
024-360	24	31.2	1600	18.0	2.4	18.0	18.0	18.0
048-360	48	62.4	6400	36.0	4.8	36.0	36.0	36.0
003-450	3	3.9	20	2.25	0.3	2.25	2.25	2.25
005-450	5	6.5	55.6	3.75	0.5	3.75	3.75	3.75
006-450	6	7.8	80	4.50	0.6	4.50	4.50	4.50
009-450	9	11.7	180	6.75	0.9	6.75	6.75	6.75
012-450	12	15.6	320	9.00	1.2	9.00	9.00	9.00
024-450	24	31.2	1280	18.0	2.4	18.0	18.0	18.0
048-450	48	62.4	5120	36.0	4.8	36.0	36.0	36.0
003-800	3	3.9	11	2.25	0.3	2.25	2.25	2.25
005-800	5	6.5	31	3.75	0.5	3.75	3.75	3.75
006-800	6	7.8	45	4.50	0.6	4.50	4.50	4.50
009-800	9	11.7	101	6.75	0.9	6.75	6.75	6.75
012-800	12	15.6	180	9.00	1.2	9.00	9.00	9.00
024-800	24	31.2	720	18.0	2.4	18.0	18.0	18.0
048-800	48	62.4	2880	36.0	4.8	36.0	36.0	36.0

CAUTION: 1. The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.  
 2. Pickup and release voltage are for test purposes only and are not to be used as design criteria.


## Operation condition

Insulation Resistance	250MΩ min (at 500VDC)	Item 7 of IEC 60255-5
Dielectric Strength	50Hz 750V Between contacts Between contact and coil	Item 6 of IEC 60255-5 Item 6 of IEC 60255-5
Shock resistance	100m/s <sup>2</sup> 11ms	IEC 68-2-27 Test Ea
Vibration resistance	10Hz~55Hz double amplitude 1.5mm	IEC 68-2-6 Test Fc
Terminals strength	5N	IEC 68-2-21 Test Ua1
Solderability	235℃ ± 2℃ 3s ± 0.5s	IEC 68-2-20 Test Ta method 1
Ambient Temperature	-55℃~85℃	
Relative Humidity	93% (at 40℃)	IEC 68-2-3 Test Ca
Mass	9.5g	

## Safety approvals


Safety approval	UL	Load	20A/125VAC,16VDC 12A/28VDC 10A/250VAC 6A/277VAC 1/3HP 125VAC/277VAC
	TUV		6A/250VAC 28VDC
	CQC		7A/250VAC

## Dimensions

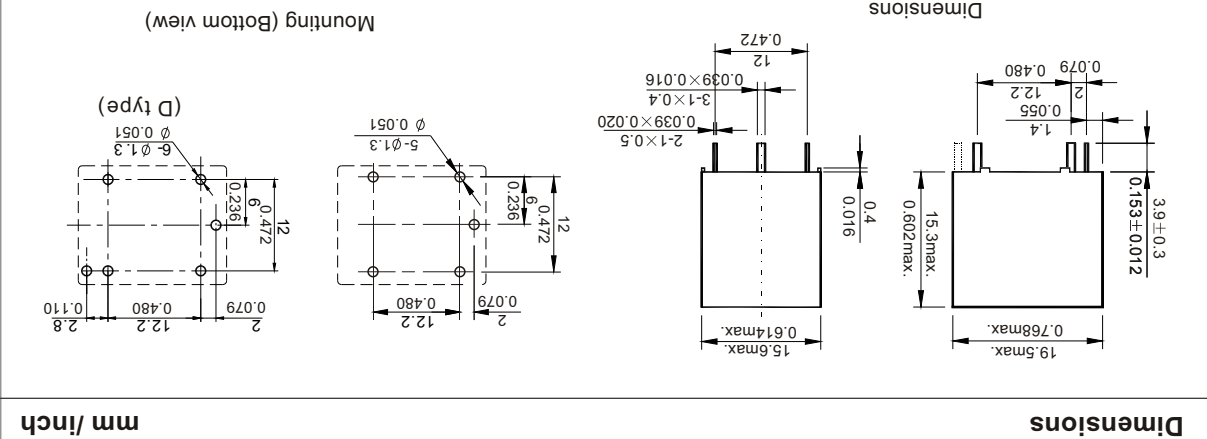

NOTES 1) Dimensions are in millimeters.  
 2) Inch equivalents are given for general information only.

## Wiring diagram(Bottom view)

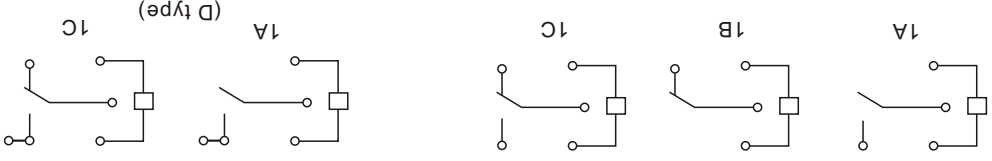

## Reference Data

