


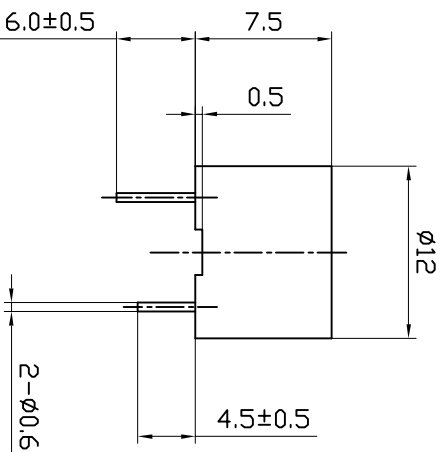


SPECIFICATION

- 1. Rated Voltage 5VDC
- 2. Operating Voltage 4~8VDC
- 3. Max Rated Current 30mA/5VDC
- 4. Min. Sound Pressure Level 85dB/10cm
- 5. Resonant Frequency 3100±500Hz
- 6. Response Time 50ms
- 7. Case Material PBT
- 8. Operating Temperature -20~+60℃
- 9. Store Temperature -30~+70℃
- 10. Weight 2g



No.		DESCRIPTION		APPROVED	DATE	UNIT mm	DRAWING SCALE	DRAWING NOT TO SCALE	SHEET	VER 1.2
No.		DESCRIPTION		APPROVED	DATE					
No.		DESCRIPTION		APPROVED	DATE	UNIT mm	DRAWING SCALE	DRAWING NOT TO SCALE	SHEET	VER 1.2
No.		DESCRIPTION		APPROVED	DATE					
No.		DESCRIPTION		APPROVED	DATE	UNIT mm	DRAWING SCALE	DRAWING NOT TO SCALE	SHEET	VER 1.2
No.		DESCRIPTION		APPROVED	DATE					
No.		DESCRIPTION		APPROVED	DATE	UNIT mm	DRAWING SCALE	DRAWING NOT TO SCALE	SHEET	VER 1.2
No.		DESCRIPTION		APPROVED	DATE					
No.		DESCRIPTION		APPROVED	DATE	UNIT mm	DRAWING SCALE	DRAWING NOT TO SCALE	SHEET	VER 1.2
No.		DESCRIPTION		APPROVED	DATE					
No.		DESCRIPTION		APPROVED	DATE	UNIT mm	DRAWING SCALE	DRAWING NOT TO SCALE	SHEET	VER 1.2
No.		DESCRIPTION		APPROVED	DATE					
No.		DESCRIPTION		APPROVED	DATE	UNIT mm	DRAWING SCALE	DRAWING NOT TO SCALE	SHEET	VER 1.2
No.		DESCRIPTION		APPROVED	DATE					
No.		DESCRIPTION		APPROVED	DATE	UNIT mm	DRAWING SCALE	DRAWING NOT TO SCALE	SHEET	VER 1.2
No.		DESCRIPTION		APPROVED	DATE					

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Magnetic Buzzer
KPX-1205B

KP3,840,661