

Ninigi

D A T A S H E E T





DHP8F SERIES D-SUB FEMALE RIGHT ANGLE TYPE 7.2 MM

Specification:



- 1) Insulator: THERMOPLASTIC(UL 94V-0).
- 2) Contact: Copper alloy
- 3) Shell: Steel
- 4) Storage temperature: - 20°C ~ 70°C
- 5) Operating temperature: 0°C ~ 85°C
- 6) Contact resistance: 20 mΩ max. (initial)
- 7) Insulation resistance: 1000 MΩ min.
- 8) Dielectric Withstanding Voltage: 500V AC (1 minute)

Series No.	No. of Contact	B	C	D
DHP8-09F	9	25.00	30.84	16.33
DHP8-15F	15	33.32	39.14	24.66
DHP8-25F	25	47.00	53.00	38.38
DHP8-37F	37	63.50	69.32	54.84

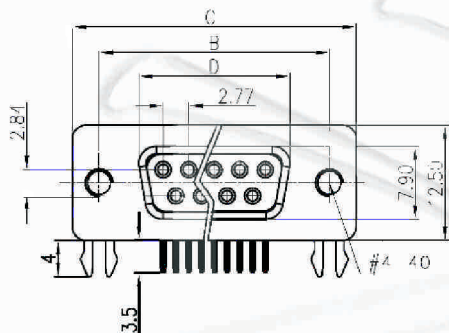

WITH SCREW TYPE