


DESCRIPTION: MALE CENTRONICS BACKSHELL KIT


- BACKSHELL KIT INCLUDES:
- (1) SOLDER CUP CONNECTOR
 - (1) BACKSHELL WITH STRAIN RELIEF, (2) SCREWS
 - (1) FACE PLATE
 - (1) RUBBER GROMMET

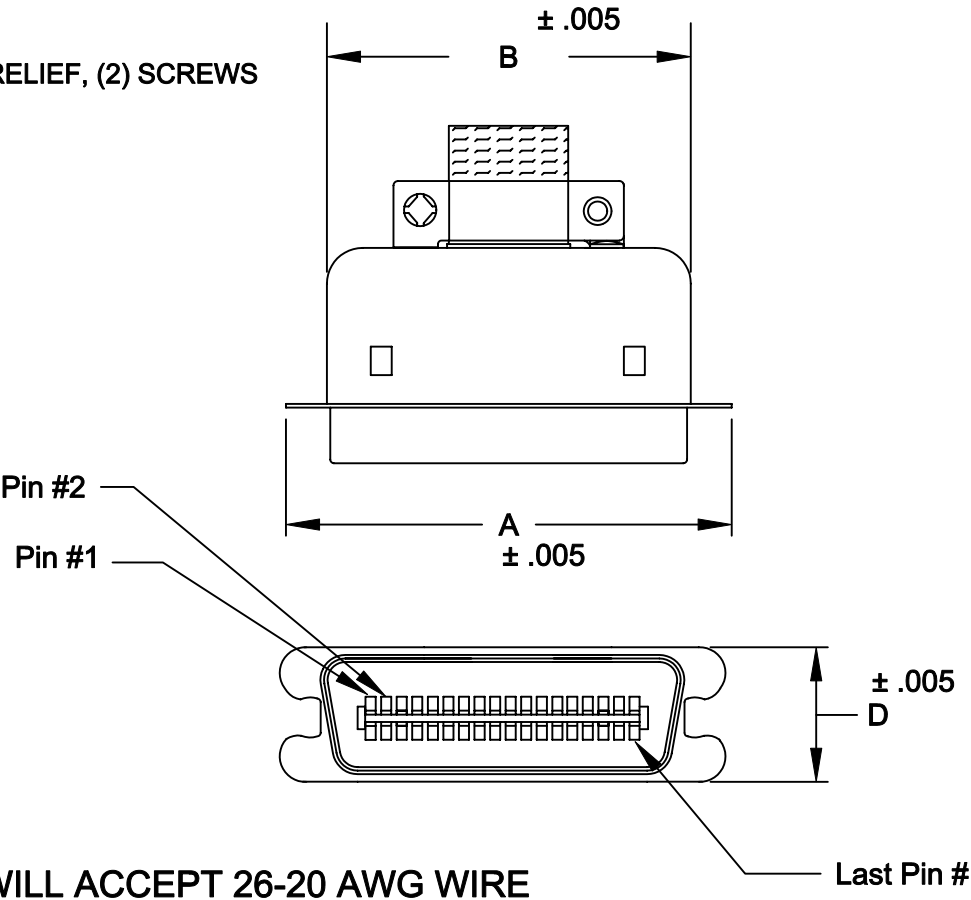

WILL ACCEPT 26-20 AWG WIRE

110-YYY-103L001

SERIES _____
POSITIONS _____
014 _____
024 - NOT AVAILABLE _____
036 _____
050 _____
GENDER _____
1 = MALE _____
2 = FEMALE _____
TERMINATION _____
0 = SOLDER CUP _____
SHELL PLATING _____
3 = NICKEL _____
HARDWARE OPTIONS _____
00 = NOT AVAILABLE _____
PLATING OPTIONS _____
1 = GOLD FLASH _____



	A	B	C	D
014	1.496	1.132	1.572	.622
	38.00	29.75	40.06	15.80
024	1.919	1.593	1.560	.622
	48.75	40.45	39.61	15.80
036	2.431	2.090	1.624	.622
	61.76	53.10	41.25	15.80
050	3.026	2.677	1.730	.622
	76.86	68.00	43.95	15.80

MATERIALS:

INSULATOR: GLASS-FILLED THERMOPLASTIC
UL RATED 94V-0 - 230°C PROCESS TEMP.
CONTACTS: COPPER ALLOY
SHELL: STEEL, NICKEL PLATED
RoHS COMPLIANT
ELECTRICALS:
CONTACT CURRENT RATING: 5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.
INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC
CONTACT RESISTANCE: 30 mOHMS MAXIMUM
OPERATING TEMPERATURE: -55°C TO +125°C



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: WAYNE ROBBINS

CHECKED:

DATE: 7-15-05

DATE:

NorComp

DWG NO. 110-YYY-103L001

SCALE: 1:1

SHEET 1 OF 1

REV 3