



INSULATOR (YELLOW)
[絶縁チューブ (黄色)]

MARKING (GREEN) MEANS
"CR" BATTERY
[緑色 (CR電池)]


12.6±0.2

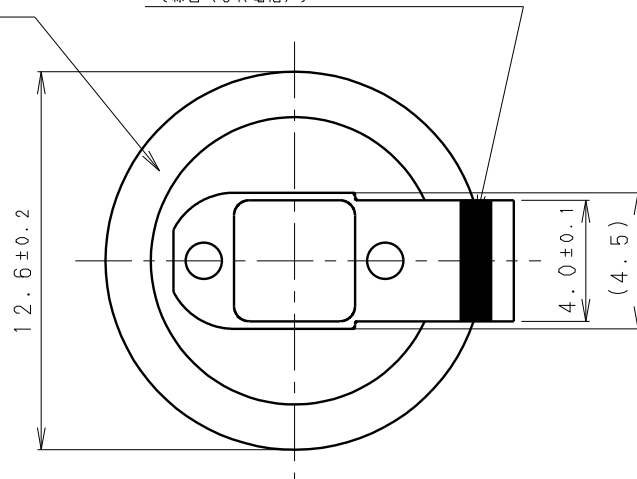

4.0±0.1
(4.5)

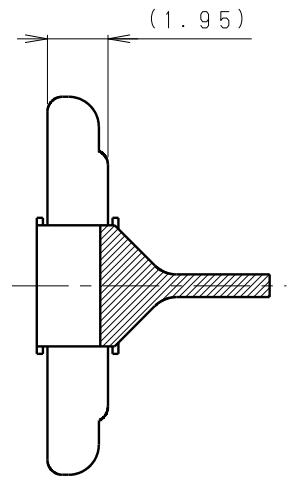


(1.95)

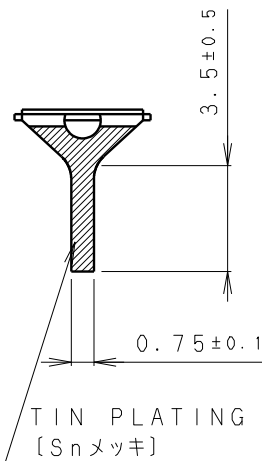

3.5±0.5

0.75±0.1

TIN PLATING
[Snメッキ]

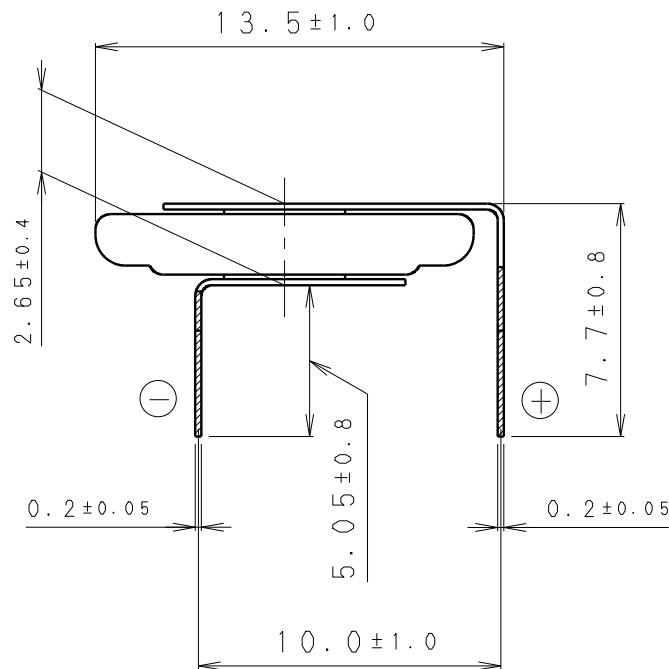

13.5±1.0

2.65±0.4

0.2±0.05


5.05±0.8

10.0±1.0

7.7±0.8


0.2±0.05

TIN PLATING
[Snメッキ]



3.5±0.5

0.75±0.1

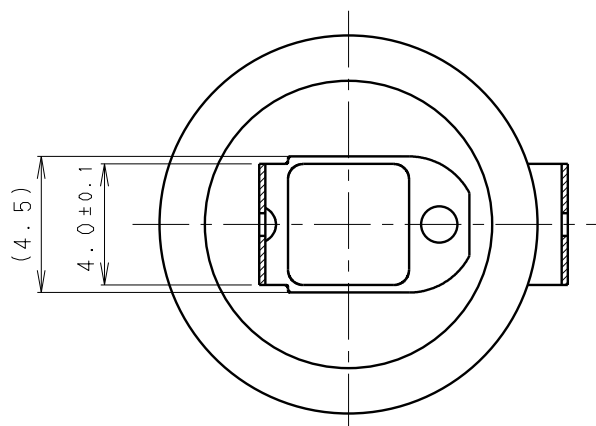

(4.5)

4.0±0.1

* NOTE [注記]

- TAB PULLING STRENGTH OVER 19.6N
[端子溶接強度: 19.6N以上]
- TAB MATERIAL: STAINLESS STEEL WITH
TIN PLATING 
[端子材料: 基材 ステンレス/表面 部分Snメッキ 
- (): REFERENCE DIMENSION AND ANGLE
[() 寸法、角度は参考値]

PRODUCT NO.	CR-1220/HFN	SCALE	
		4 : 1	
DRAWING NO.	JEHA1Z	REV.	
		0	
			UNIT: mm