


*Power over Ethernet

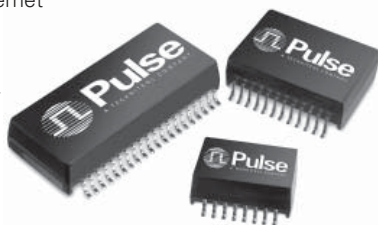


- ### Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C

RoHS Compliant Part Number	PoE	Number of Ports	Insertion Loss (dB MAX)			Return Loss (Z out = 100 Ω ±15%)			Crosstalk (adjacent channels dB MIN)			Hipot (Vrms MIN)
			0.1 MHz	1 MHz	100 MHz	30 MHz	60 MHz	80 MHz	30 MHz	60 MHz	100 MHz	
H0055NL ^{1, 6a}	No	1	-2.5	—	-1.0	-16	-10	-10	-45	-40	-33	1500
H0056NL ^{2, 6a}	No	1	—	-0.8	-0.9	-16	-10	-10	-45	-40	-33	1500
H1259NL ^{6a}	No	4	-1.2	—	-1.4	-16	-10	-10	-45	-40	-33	1500
HX1259NL ^{3, 6a}	No	4	-1.2	—	-1.4	-16	-10	-10	-45	-40	-33	1500
H1260NL ^{6a}	No	1	-1.1	—	-1.1	-16	-10	-10	-35	-30	-30	1500
HX1260NL ^{3, 6a}	No	1	-1.1	—	-1.1	-16	-10	-10	-35	-30	-30	1500
H1265NL ^{6a}	No	1	-1.3	—	-1.0	-16	-10	-10	-40	-38	-33	1500
H1266NL ^{6a}	No	4	-1.2	—	-1.0	-16	-10	-10	-45	-40	-30	1500
H1278NL ^{6a}	No	1	-1.1	—	-1.0	-16	-10	-10	-45	-40	-33	1500
H1305NL ^{6a}	No	2	-1.2	—	-1.4	-16	-10	-10	-45	-40	-33	1500
HX1305NL ^{3, 6a}	No	2	-1.2	—	-1.4	-16	-10	-10	-45	-40	-33	1500
H2260NL ^{6a}	Yes ⁴	1	-1.1	—	-1.1	-16	-10	-10	-35	-30	-30	1500
HX2260NL ^{3, 6a}	Yes ⁴	1	-1.1	—	-1.1	-16	-10	-10	-35	-30	-30	1500
H2305NL ^{6a}	Yes ⁴	2	-1.2	—	-1.4	-16	-10	-10	-45	-40	-33	1500
HX2305NL ^{3, 6a}	Yes ⁴	2	-1.2	—	-1.4	-16	-10	-10	-45	-40	-33	1500

1. **H0055NL** is designed to meet 200 μ H nom.
2. **H0056NL** is designed to meet 300 μ H nom.
3. **Parts** offer extended operating temperature of -40 to +85°C
4. **These** parts are compliant to IEEE802.3af. Power over Ethernet (PoE) standard.
5. **When** ordering Tape & Reel packaging, add a **"T"** suffix to the end of the part number, e.g. H0056NL**T**
6. **MSL** = Moisture Sensitivity Level: **a**=1, **b**=2, **c**=3, **d**=4, **e**=5

H0055NL

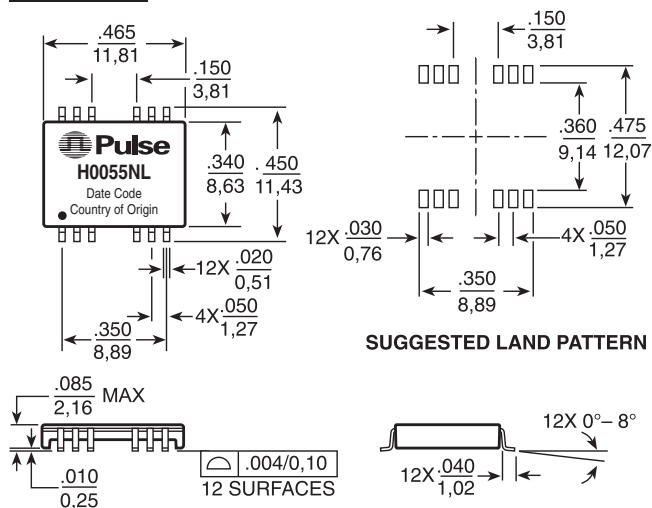


SUGGESTED LAND PATTERN

Weight355 grams
Tape & Reel . . . 1000/reel
Tube 40/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$

H0056NL

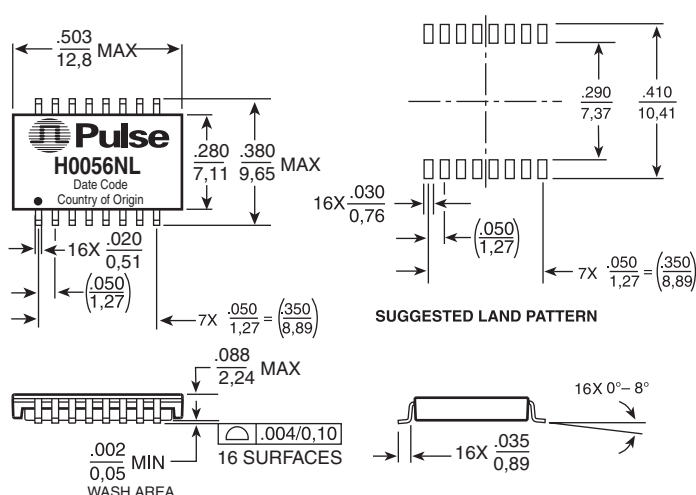

SUGGESTED LAND PATTERN

Weight3 grams
Tape & Reel . . . 2000/reel
Tube 40/tube

Star Magnetics™


10/100BASE-T Transformer Modules

with PoE* Option and 1:1 Turns Ratios




Mechanicals (continued)

H1259NL, HX1259NL, H1266NL

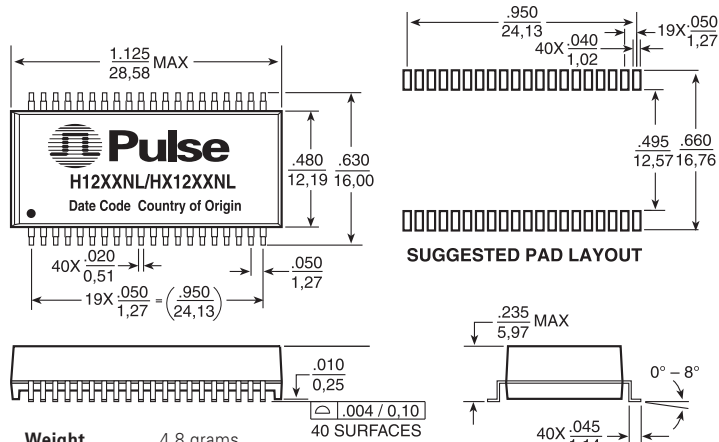


Dimensions: Inches mm Unless otherwise specified, all tolerances are $\pm .010 / 0.25$

H1260NL, HX1260NL, H2260NL, HX2260NL

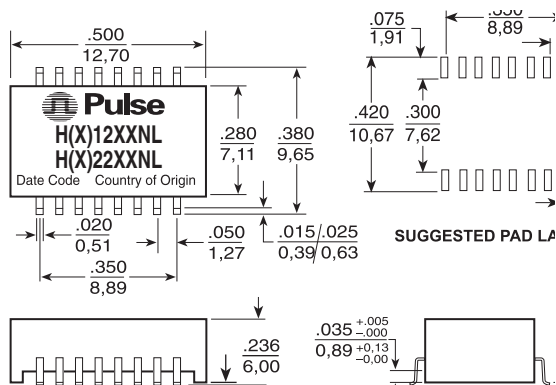


Weight 2.8 grams
Tube 45/tube
Tape & Reel 600/reel

H1265NL

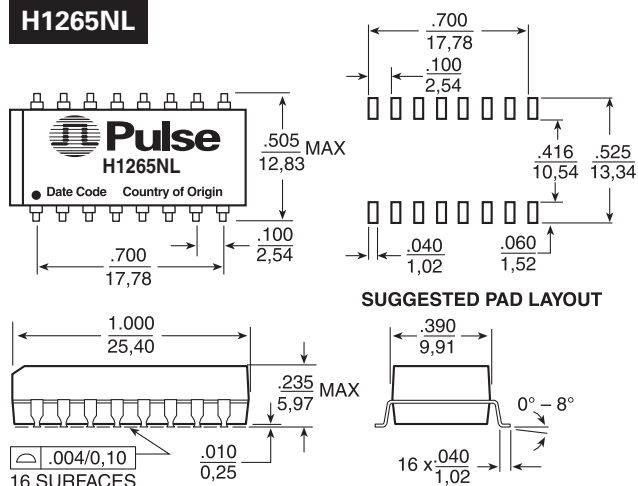


Dimensions: Inches mm Unless otherwise specified, all tolerances are $\pm .010 / 0.25$

H1278NL

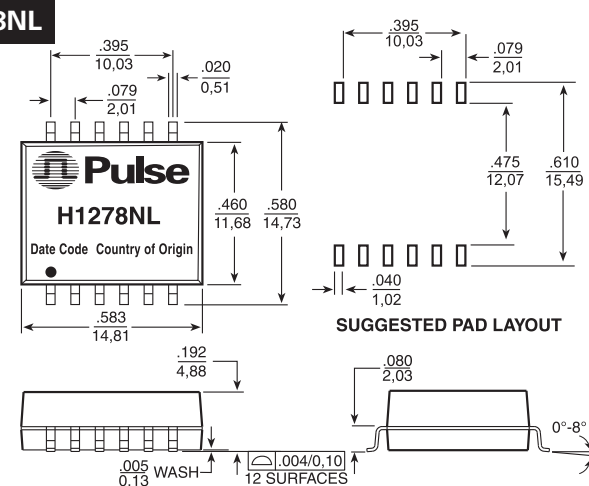

Weight 1.7 grams
Tape & Reel 350/reel
Tube 30/tube

H1305NL, HX1305NL, H2305NL, HX2305NL

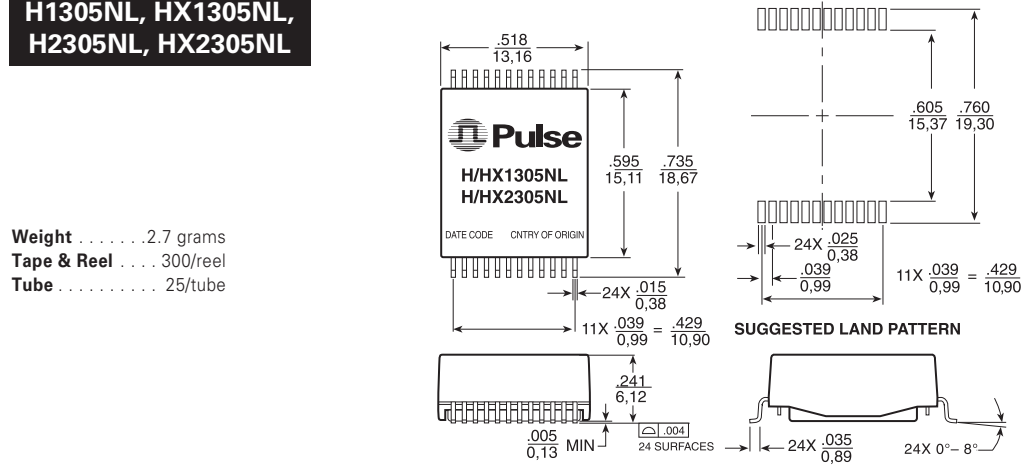

Dimensions: Inches mm Unless otherwise specified, all tolerances are $\pm .010 / 0.25$

Star Magnetics™

10/100BASE-T Transformer Modules


with PoE* Option and 1:1 Turns Ratios

*Power over Ethernet




Schematics


H0055NL

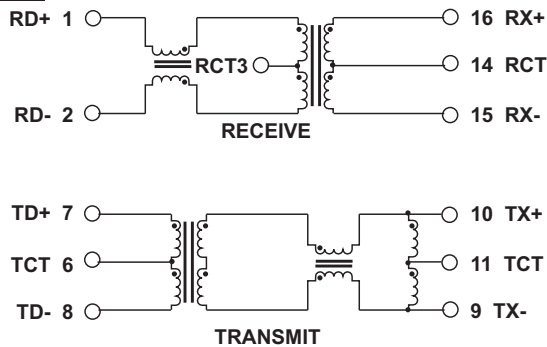


H0056NL

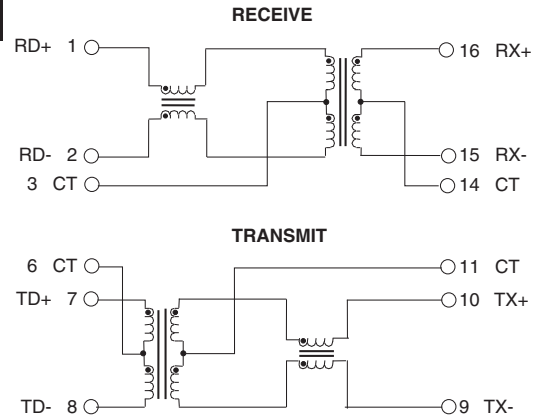


H1259NL, HX1259NL

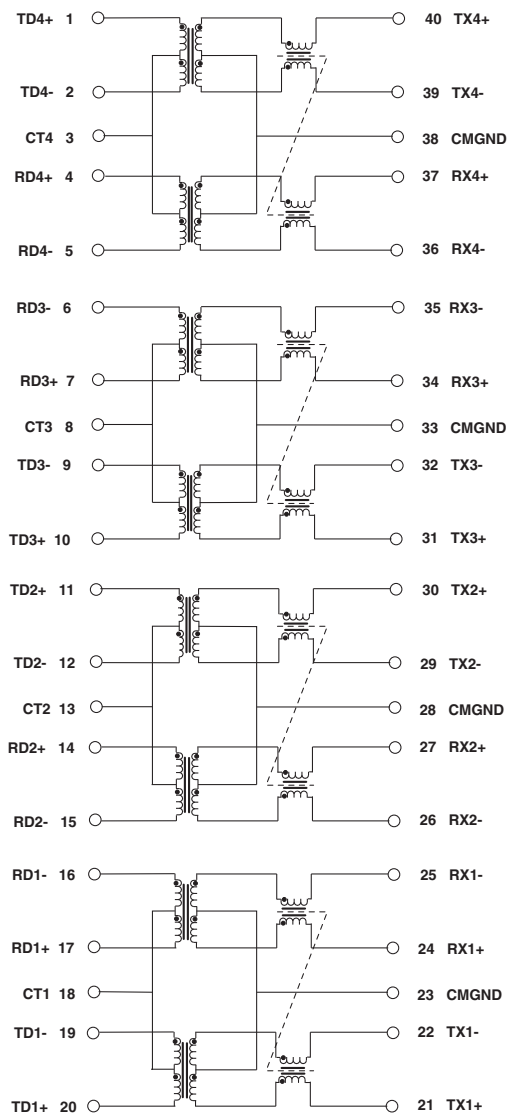

H1260NL, HX1260NL

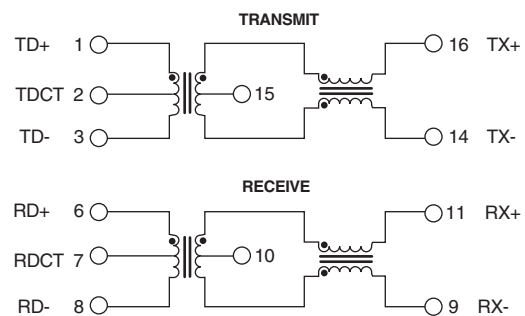

H1265NL

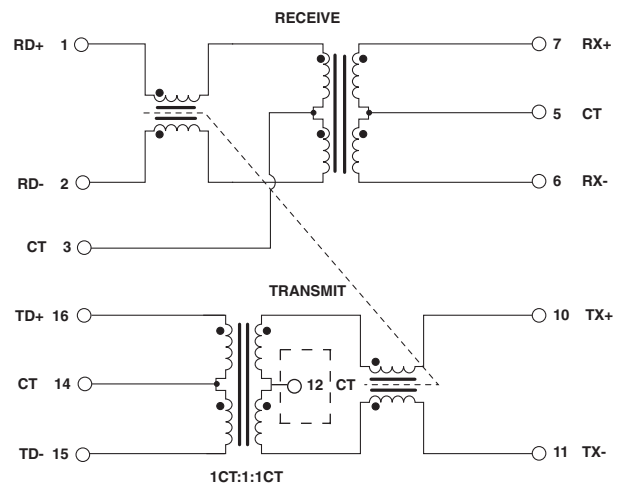

H1265: 3-core design (T3 same toroid core)

Star Magnetics™

10/100BASE-T Transformer Modules



with PoE* Option and 1:1 Turns Ratios

*Power over Ethernet





Schematics (continued)


H1266NL

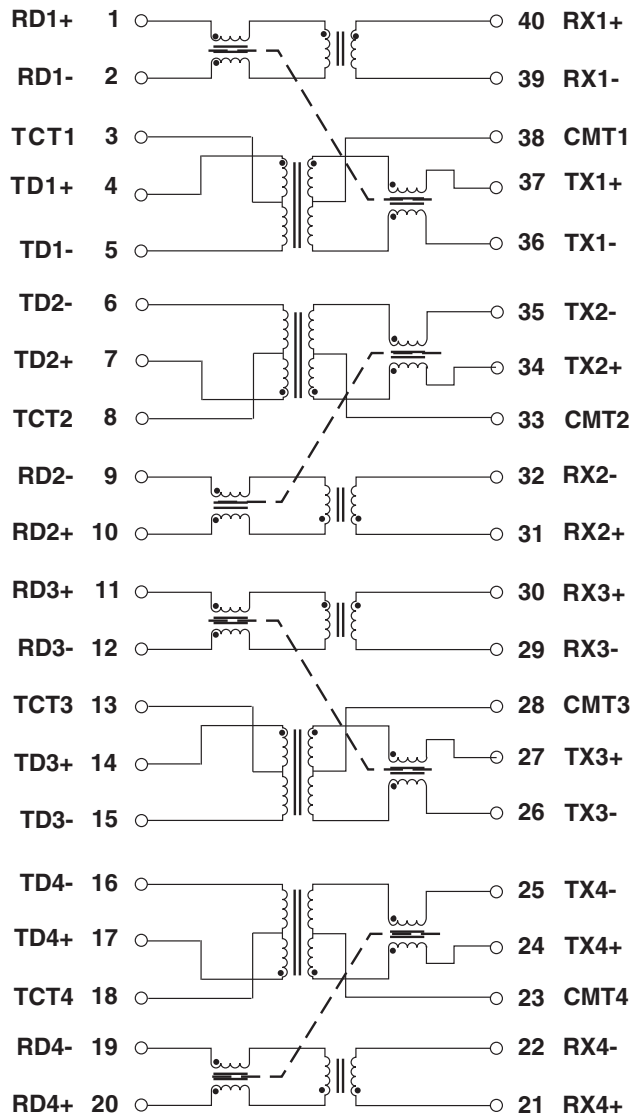

H1305NL, HX1305NL

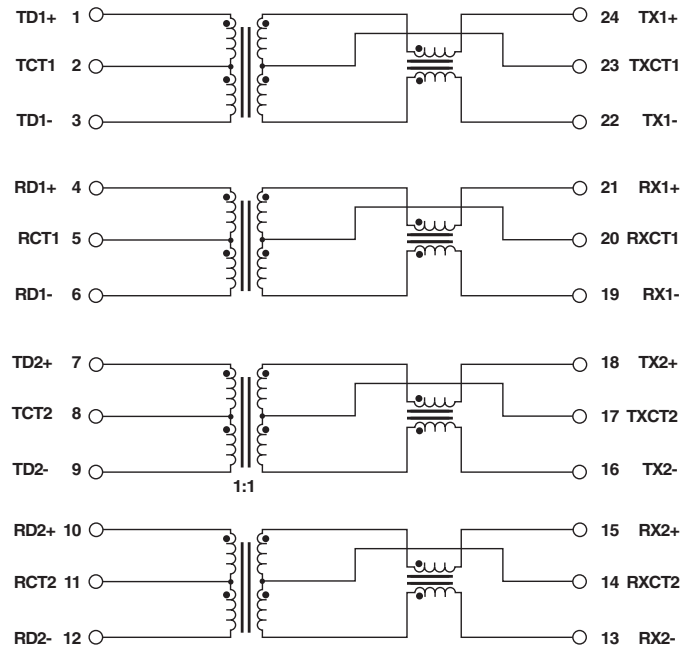

H1278NL

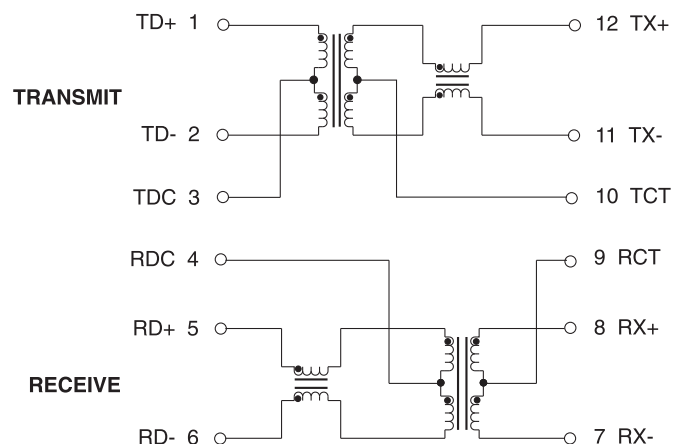

Star Magnetics™

10/100BASE-T Transformer Modules


with PoE* Option and 1:1 Turns Ratios

*Power over Ethernet





Schematics (continued)

H2260NL, HX2260NL

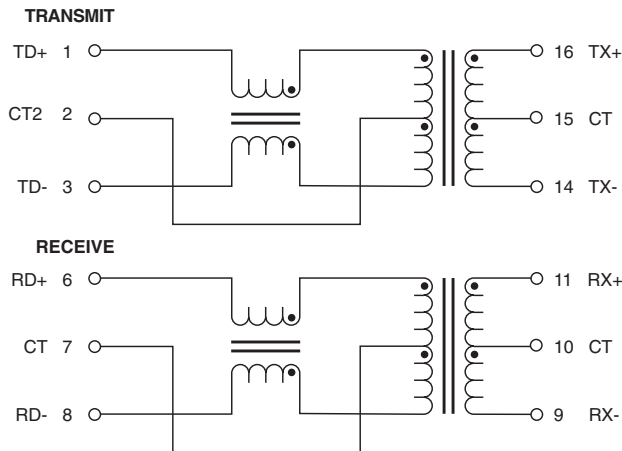

H2305NL, HX2305NL

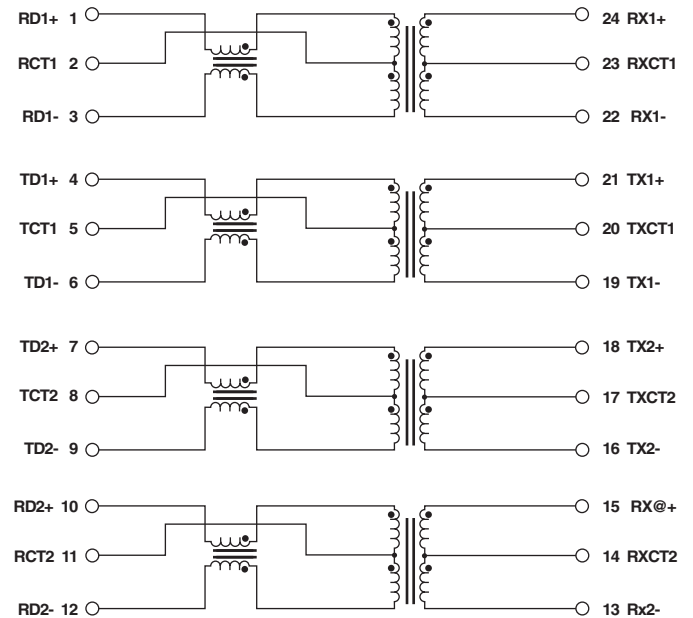

For More Information:

Pulse Worldwide Headquarters

12220 World Trade Dr.
San Diego, CA 92128
U.S.A.

www.pulseeng.com

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe

Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 7806 0
Fax: 49 7032 7806 135

Pulse China Headquarters

B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Rd.
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

TEL: 86 755 33966678
FAX: 86 755 33966700

Pulse North China

Room 1503
XinYin Building
No. 888 YiShan Rd.
Shanghai 200233
China

Tel: 86 21 54643211/2
Fax: 86 21 54643210

Pulse South Asia

135 Joo Seng Rd.
#03-02
PM Industrial Bldg.
Singapore 368363

TEL: 65 6287 8998
FAX: 65 6280 0080

Pulse North Asia

No. 26, Kao Ching Rd.
Yang Mei Chen
Taoyuan Hsien
Taiwan
R. O. C.

Tel: 886 3 4643715
Fax: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2009. Pulse Engineering, Inc. All rights reserved.