


# THT CURRENT SENSE TRANSFORMERS & INDUCTORS

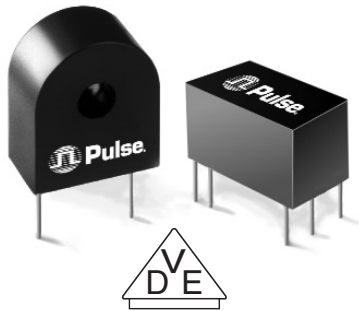

- VDE Approved
- Designed for switching power supply applications
- Transformer meets IEC950 insulation requirements
- Frequency range from 20kHz to 200kHz

## Electrical Specifications @ 25°C — Operating Temperature -40°C to 130°C

| Part Number<br>Transformer<br>with 2-1 T<br>Primaries | Schem.<br>Figure | Part Number<br>Transformer<br>with 1T<br>Primary | Schem.<br>Figure | Part Number<br>Inductor<br>without<br>Primary | Schem.<br>Figure | Turns<br>Ns | Secondary<br>Inductance<br>MH<br>(MIN) | Secondary<br>Inductance<br>Test Voltage<br>(15.75 KHz) | RS<br>(Ω MAX) | RT<br>(Ω NOM) | Primary<br>Unipolar<br>Amp μ Sec.<br>Rating (MAX) | Primary<br>Bipolar<br>Amp μ Sec.<br>Rating (MAX) |
|-------------------------------------------------------|------------------|--------------------------------------------------|------------------|-----------------------------------------------|------------------|-------------|----------------------------------------|--------------------------------------------------------|---------------|---------------|---------------------------------------------------|--------------------------------------------------|
| —                                                     | 1C               | PE-63586                                         | 1A               | PE-51686                                      | 2A               | 50          | 5.0                                    | 0.5                                                    | 0.7           | 50            | 150                                               | 300                                              |
| PE-64487                                              | 1C               | PE-63587                                         | 1A               | PE-51687                                      | 2A               | 100         | 20.0                                   | 1.0                                                    | 1.40          | 100           | 300                                               | 600                                              |
| PE-64488                                              | 1C               | PE-63588                                         | 1A               | PE-51688                                      | 2A               | 200         | 80.0                                   | 2.0                                                    | 4.50          | 200           | 600                                               | 1200                                             |
| PE-64517                                              | 1D               | PE-63617                                         | 1B               | PE-51717                                      | 2B               | 50CT        | 5.0                                    | 0.5                                                    | 0.7           | 50            | 150                                               | 300                                              |
| PE-64518                                              | 1D               | PE-63618                                         | 1B               | PE-51718                                      | 2B               | 100CT       | 20.0                                   | 1.0                                                    | 1.40          | 100           | 300                                               | 600                                              |
| PE-64519                                              | 1D               | PE-63619                                         | 1B               | PE-51719                                      | 2B               | 200CT       | 80.0                                   | 2.0                                                    | 4.50          | 200           | 600                                               | 1200                                             |
| —                                                     | —                | PE-63691                                         | 1B               | —                                             | —                | 300CT       | 180.0                                  | 3.0                                                    | 11.0          | 300           | 900                                               | 1800                                             |


### NOTES:

- Maximum ratings specified with rated secondary terminating resistance and 1 turn primary.
- Amp-microsecond (AμSec.) rating of primary equals volt microsecond (VμSec.) rating of secondary when secondary is terminated in rated resistance. (Amp—microseconds is equal to the product of a square pulse of current in amps, times the current pulse width in microseconds.
- Maximum operating temperature 105°C (ambient plus rise).
- When terminated with rated terminating resistance, the inductor scale factor is  $V_{out} = 1$  volt per amp. for center tapped units terminating resistance for each half of winding is listed value divided by two.
- 1 turn primary peak sense current is 20 amps for all parts listed above.



## Mechanicals

## Schematics

### Transformer

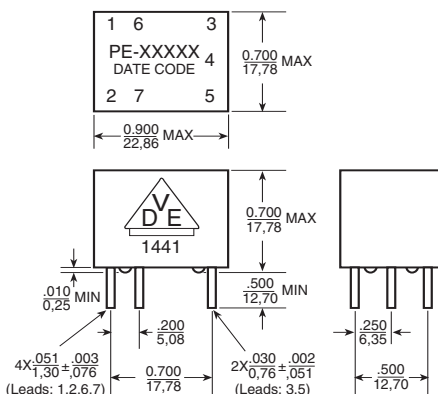

### Inductor

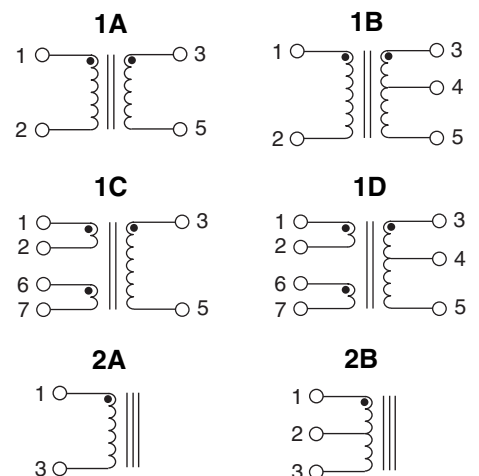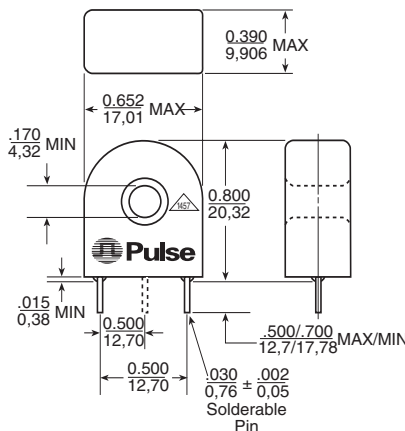

Dimensions: Inches  
mm

Unless otherwise specified, all tolerances are ± .005  
0,13

## For More Information :

### UNITED STATES (Worldwide)

12220 World Trade Drive  
San Diego, CA 92128  
U.S.A.  
<http://www.pulseeng.com>  
TEL: 858 674 8100  
FAX: 858 674 8262

### UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road  
The Surrey Research Park  
Guildford, Surrey GU2 5RE  
United Kingdom  
TEL: 44 1483 401700  
FAX: 44 1483 401701

### FRANCE (Southern Europe)

Zone Industrielle  
F-39270  
Orgelet  
France  
TEL: 33 3 84 35 04 04  
FAX: 33 3 84 25 46 41

### SINGAPORE (Southern Asia)

150 Kampong Ampat  
#07-01/02  
KA Centre  
Singapore 368324  
TEL: 65 6287 8998  
FAX: 65 6280 0080

### TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1  
HsinTai Wu Road  
Hsi-Chih, Taipei Hsien  
Taiwan, R.O.C.  
Tel: 886 2 2698 0228  
FAX: 886 2 2698 0948

### HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang  
Shatin Warehouse Centre  
6 Wong Chuk Yeung Street  
Fotan, Shatin, Hong Kong  
TEL: 852 2788 6588  
FAX: 852 2776 1055

### DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.