

T3/DS3/E3/STS-1 TRANSFORMERS

Extended Temperature Range



- Operating temperature of -40°C to +85°C
- Models matched to leading transceiver ICs
- Return loss meets requirements of G.703
- 1500 Vrms isolation per UL1459 and UL1950 (pending)


Electrical Specifications @ 25°C — Operating Temperature -40°C to +85°C

Part Number	Turns Ratio (Pri:Sec ±2%)	OCL Primary @ 25°C (µH MIN)	OCL Primary @ -40°C (µH MIN)	L _L @ 100 kHz, 0.2 Vrms (µH TYP)	C _{www} (pF MAX)	Bandwidth 75 Ω System (MHz TYP)	Isolation Voltage (Vrms MIN)	Package/Schematic	Primary Pins
T3001	1:1	100	40	.110	10	.200 - 340	1500	LS-2/E	1-3
T3002	1:2CT	40	19	.110	12	.250 - 500	1500	LS-2/C	4-6
T3011*	1:1	100	40	.110	10	.200 - 340	1500	LS-1/E	4-6
T3012*	1:2CT	40	19	.110	12	.250 - 500	1500	LS-1/C	4-6
T3027	1CT:1CT	40	19	.10	10	.200 - 340	1500	LS-2/F	1-3
T3029	1:1.155CT	40	20	.150	12	.200 - 340	1500	LS-2/C	4-6


*Models with alternate pinout configurations.

Mechanicals


LS-1

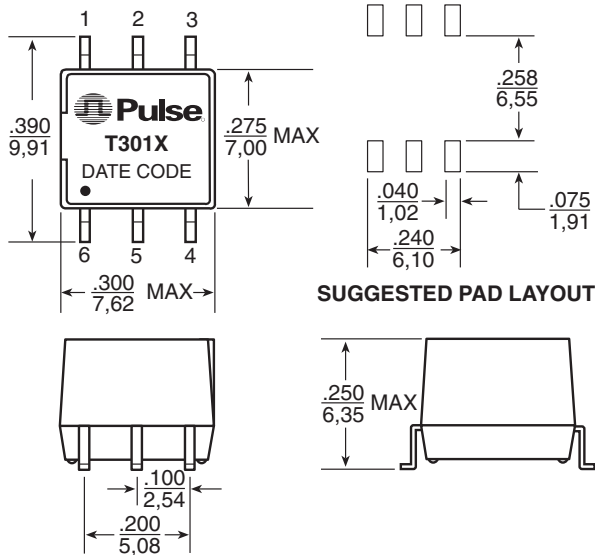

LS-2

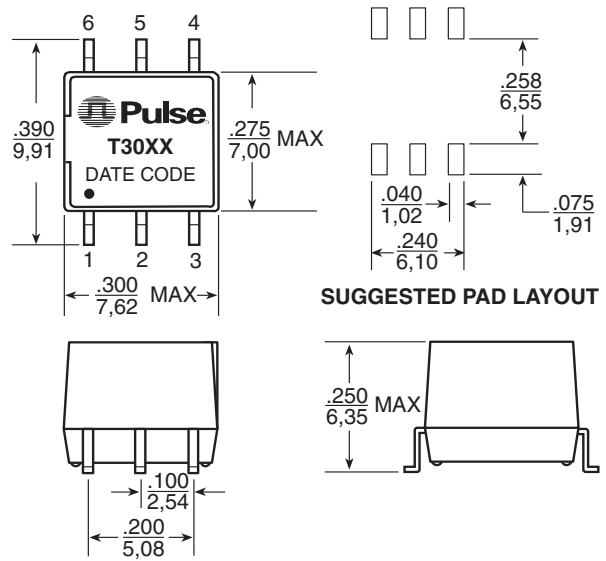

Schematics

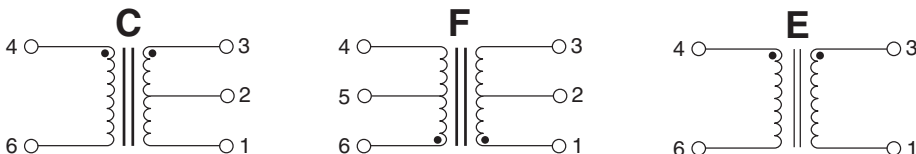

Weight 0.6 grams
 Tape & Reel 600/reel
 Tube70/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
 Unless otherwise specified,
 all tolerances are $\pm \frac{.010}{0,25}$

T3/DS3/E3/STS-1 TRANSFORMERS

Extended Temperature Range



Transformer Selection Guide

IC Manufacturer/ IC Part Number	Single SMT				Single THT		Single THT (3 kVrms)	
	Standard Temperature		Extended Temperature		Transmit	Receive	Transmit	Receive
	Transmit	Receive	Transmit	Receive				
Conexant (Rockwell) CN8331, CN8332, CN8333	PE-65967	PE-65967	T3001	T3001	PE-65966	PE-65966	PE-68629	PE-68629
Infineon Technologies PEB3452	-	-	T3027	T3011/T3001	-	-	-	-
Lucent Technologies T7296	PE-65967	-	T3001	-	PE-65966	-	PE-68629	-
Exar XRT7295, XRT7295E XRT7296, XRT7298 XRT73L00/L03/L04 XRT7300, XRT7302	- PE-65967 PE-65967 PE-65967	PE-65967 - PE-65967 PE-65967	- T3001 T3001 T3001	T3001 - T3001 T3001	- PE-65966 PE-65966 PE-65966	PE-65966 - PE-65966 PE-65966	- PE-68629 PE-68629 PE-68629	PE-68629 - PE-68629 PE-68629
TDK Semiconductor 78P2241 78P2244/43/42 78P7200L 78P7200 78P2361, 78P2362	PE-65968 PE-65968 PE-65968 PE-65968 PE-65968	PE-65967 PE-65967 PE-65967 PE-65967 PE-65967	T3002 T3002 T3002 T3002 T3002	T3001 T3001 T3001 T3002 T3001	PE-65969 PE-65969 PE-65969 PE-65969 PE-65969	PE-65966 PE-65966 PE-65966 PE-65969 PE-65966	PE-68630 PE-68630 PE-68630 PE-68630 PE-68630	PE-68629 PE-68629 PE-68629 PE-68630 PE-68629
Transwitch MRT TXC-02050, E3 ART TXC-02020 ARTE TXC-02021 DART TXC-2030, DS3 DART TXC-2030, E3 DS3LIM-SN TXC-20153G E3LIM TXC-20163	PE-65968 PE-65967 PE-65967 PE-65967 PE-65968 PE-65967 PE-65968	PE-65967 PE-65967 PE-65967 PE-65967 PE-65967 PE-65967 PE-65967	T3002 T3001 T3001 T3001 T3002 T3001 T3002	T3001 T3001 T3001 T3001 T3001 T3001 T3001	PE-65969 PE-65966 PE-65966 PE-65966 PE-65969 PE-65966 PE-65966	PE-65966 PE-65966 PE-65966 PE-65966 PE-65966 PE-65966 PE-65966	PE-68630 PE-68629 PE-68629 PE-68629 PE-68630 PE-68629 PE-68629	PE-68629 PE-68629 PE-68629 PE-68629 PE-68629 PE-68629 PE-68629

NOTE: For Standard temperature products, please see data sheet **T606**.

Application Notes

- The transformers have been developed for use as transmit and receive transformers in T3 or DS3 links, using bit rates of 44.736 Mbps and B3ZS coding on coaxial cable. The characteristics allow compliance with the pulse templates of CCITT G.703 as well as ATT T.A.34. The transformers are also suitable for the E3 interface at 34.368 Mbps with HDB3 coding or STS-1 applications, at 51.84 Mbps according to Bellcore TA-NWT-000253.
- Bandwidth specifications are typical in a 75 Ω system. Return loss meets the requirements of G.703. Materials used in the products are UL94-V0 recognized. Products meet the requirements of IEC 695-2-2 (Needle Flame Test).
- The surface mount LS package is available with optional tape and reel packaging. To order, add a "T" suffix to the part number (i.e.: T3001T).

For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
http://www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang
Shatin Warehouse Centre
6 Wong Chuk Yeung Street
Fotan, Shatin, Hong Kong
TEL: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective owners.

Printed on recycled paper. ©2003, Pulse Engineering, Inc.

T619.A (9/03)