

TECHNICAL DATA



ORIGINAL

STRAIGHT JACK RECEPTACLE FOR PCB SOLDER LEGS


R113.426.010

SERIES

MCX

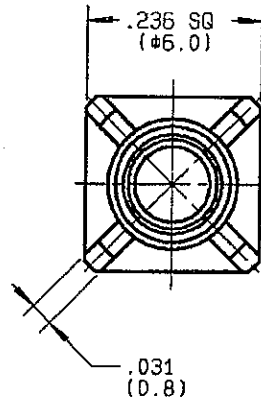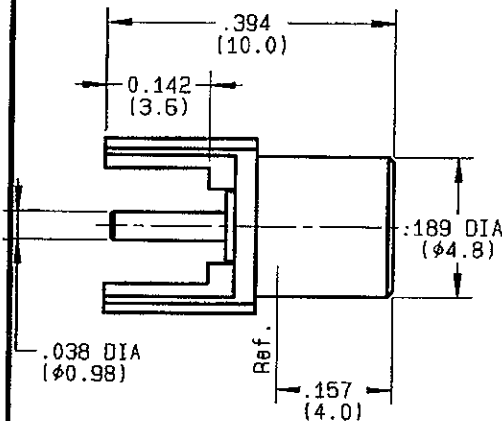

PERCEPAGE PANNEAU
MOUNTING HOLE

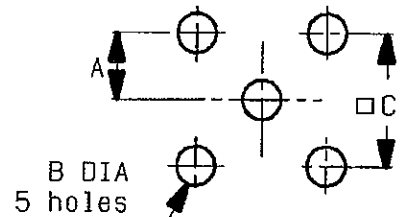

	MM		INCH	
	maxi	mini	maxi	mini
A	-	-	-	-
B	1.4	1.3	.055	.051
C	5.13	5.03	.202	.198

NOMINAL IMPEDANCE	50	Ω
FREQUENCY RANGE	0-6	GHz
TEMPERATURE RATING	-55/+155	°C
V.S.W.R	1.05 + .05 x F(GHz)Maxi	
RF INSERTION LOSS	0.03 √F(GHz) dB Maxi	
VOLTAGE RATING	335	Veff Maxi
DIELECTRIC WITHSTANDING VOLTAGE	1000	Veff Mini
INSULATION RESISTANCE	1000	M ΩMini
HERMETIC SEAL	NA	Atm.cm ³ /s
LEAKAGE (pressurized only)	NA	
MECHANICAL DURABILITY	500	Cycles
WEIGHT		gr
SPECIFICATION	6300289 8 REV.C	

CABLES :

PACKAGING		
Standard	Unit	Other
100	'W' option	Contact us

OTHERS CHARACTERISTICS

CABLE RETENTION	NA	N Mini
CENTER CONTACT RETENTION		
Axial force - mating end	10	N Mini
Axial force - opposite end	10	N Mini
Torque	NA	cm.N Mini
RECOMMENDED TORQUES		
Mating	NA	cm.N
Panel nut	NA	cm.N
Clamp nut	NA	cm.N

CONNECTOR PARTS MATERIALS

BODY	BRASS
OUTER CONTACT	
CENTER CONTACT	BERYLLIUM COPPER
INSULATOR	PTFE
GASKET	
OTHERS PIECES	

FINISH (all values are given in micrometers)

GOLD 0.8 OVER COPPER 2.5
GOLD 1.3 OVER COPPER 0.5
-
-

ISSUE
0701E

CREATION DATE
06/12/1993

FILE PART-NUMBER
93-0400-443



RADIALL®

The information given here is subject to change without notice.
Design changes may be in order to improve the product.

Connect to the future