

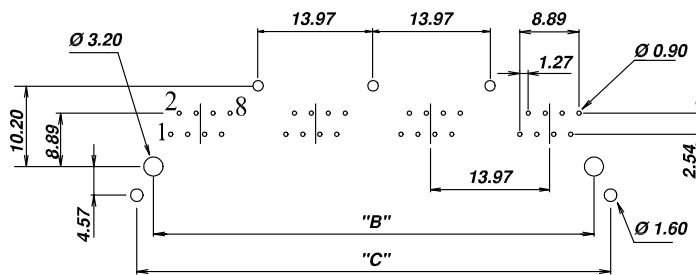
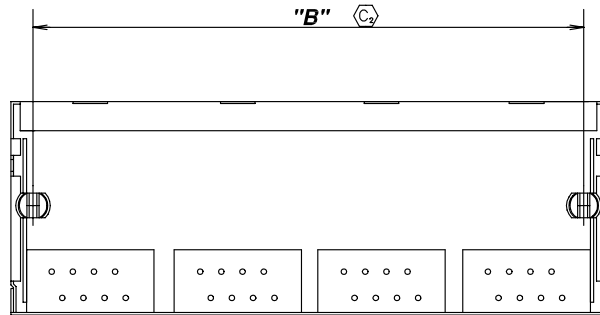



REVISION D

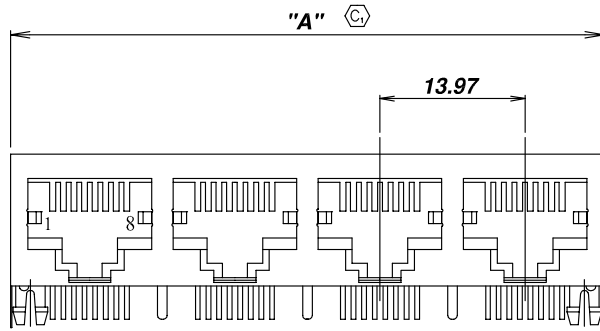

PCB LAYOUT

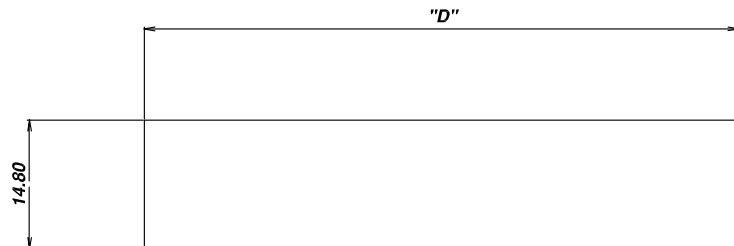

SUGGESTED PANEL CUTOUT DIMENSIONS

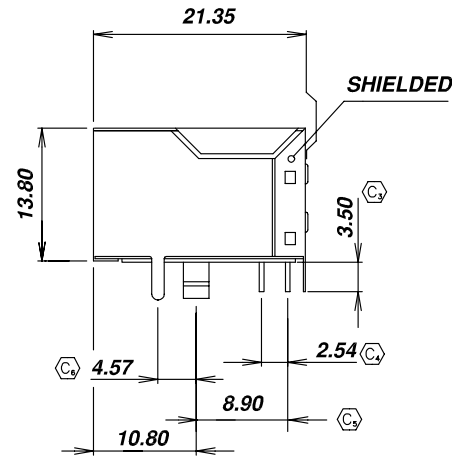

MODM-A-XX-8P8C-X-S

TYPE
-A:

PORTS
-02
-03
-04
-05
-06
-08

POSITIONS/CONTACTS
-8P8C: 8 Pos/8 Con

PLATING
-G: .000015" Au
-H: .000030" Au
-E: .000050" Au
(SEE NOTE 2)

SHIELD
-S

NOTES:

1. (C) REPRESENTS A CRITICAL DIMENSION
2. GOLD THICKNESS MEASURED ON MATING AREAS, GOLD FLASH ON TAILS

PORTS	-02	-03	-04	-05	-06	-08
DIM "A"	31.00	44.97	58.94	72.91	86.88	114.90
DIM "B"	23.40	39.37	53.34	67.31	81.26	109.22
DIM "C"	30.80	44.77	58.74	72.71	86.68	114.60
DIM "D"	32.00	45.97	59.94	73.91	87.88	113.90

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:
DECIMALS X.XX±0.25
X.XXX±0.13
X.XXXX±0.05

ANGLES ±3

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

samtec

520 PARK EAST BLVD. NEW ALBANY, IN 47150
(812) 944-6733 P.O. BOX 1147 TWX: 810-540-4085

CODE: 55322

DO NOT SCALE DRAWING
INSULATOR: PBT 20% Glass Filled (UL 94V-0) Black
CONTACT: Phosphor Bronze
SHELL: Copper Alloy
MAX FLASH ALLOWED: .002
MAX GATE VESTIGE: .002

SHEET SCALE: 1:2

DESCRIPTION:
8 Position Side Entry Gang Jack

DWG. NO.
MODM-A-XX-8P8C-X-S

BY: J. RILEY 10/31/2003 SHEET 1 OF 1