

Keyword:
 Standard Use and
 Stand-By

Type: **SL-340**


Performance Data **Size BEL**
 (Typical values for batteries stored at 25°C for one year)

System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	0.40 Ah
Nominal current	0.3 mA
Max. continuous discharge current	3 mA
Anode surface area	2.4 cm ²
Weight	5 g
Volume	1.2 cm ³
Temperature range	-55...+75 °C


WARNING:
 Fire, explosion, and severe
 burn hazard. Do not
 recharge, disassemble,
 heat above 100 °C,
 incinerate, or expose
 contents to water.

See page 4 for further
 safety recommendations.


Typical Discharge Curves at +25°C

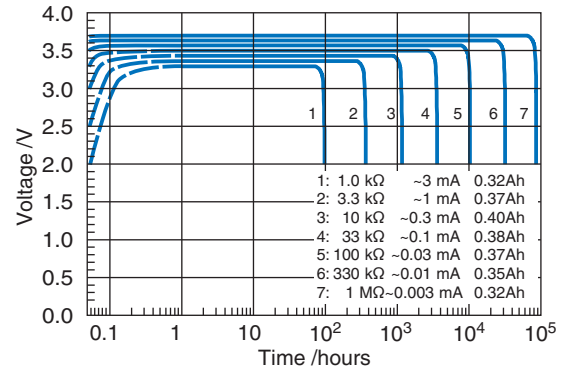


SL-340

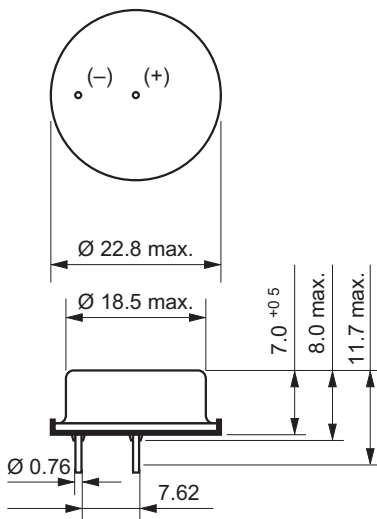

Available Capacity

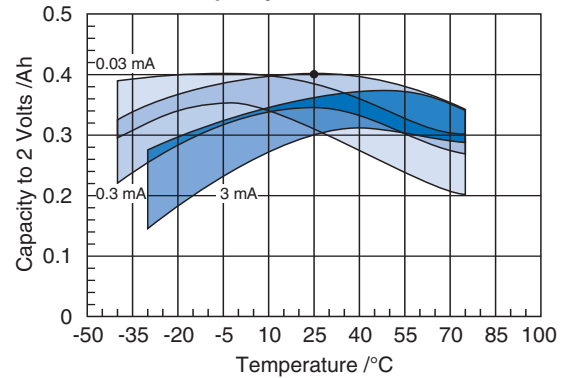

Operating Voltage

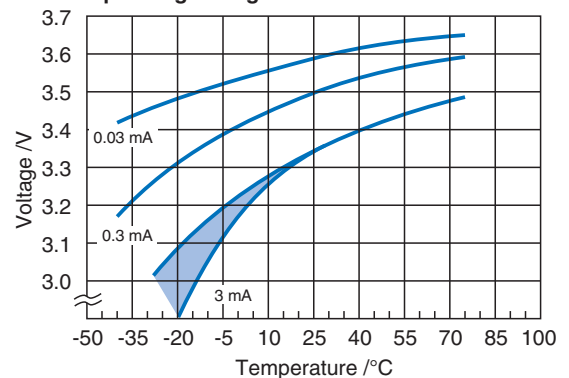

Available Terminations

SL-340 Pins

Catalogue No.

11 1 13404 00

*Any values given here are
 for information purposes
 only. They also depend on
 actual conditions of use
 and are not warranties of
 future performance.
 Subject to change.*