

Type: SL-389


Performance Data **Size 1/10D**
 (Typical values for batteries stored at 25°C for one year)

System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	1.0 Ah
Nominal current	1 mA
Max. continuous discharge current	10 mA
Anode surface area	7.5 cm ²
Weight	17 g
Volume	5 cm ³
Temperature range	-55...+75 °C


WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 100 °C, incinerate, or expose contents to water.

See page 4 for further safety recommendations.


Typical Discharge Curves at +25°C

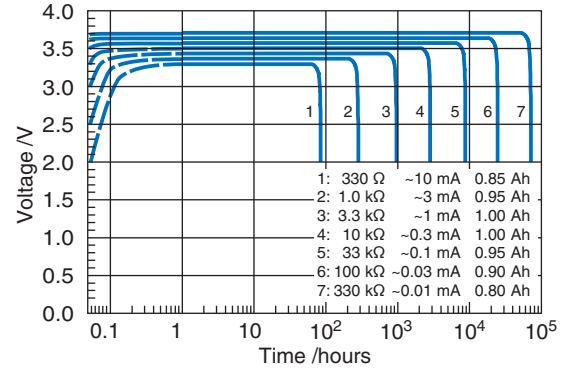


SL-389

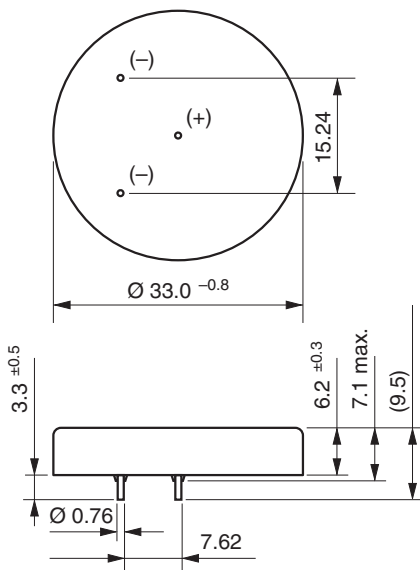

Available Capacity

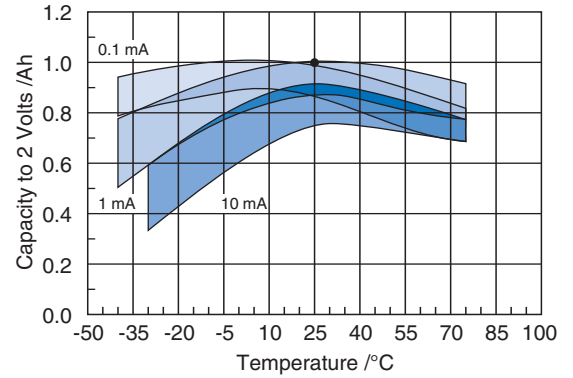

Operating Voltage

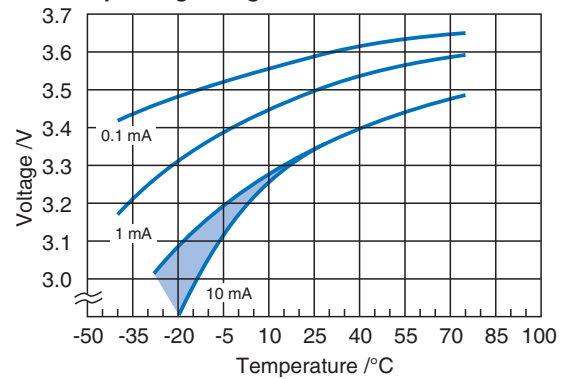

Available Terminations

SL-389 Pins

Catalogue No.

11 1 13894 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.