



- NOTES:
1. SUGGESTED MOUNTING HOLE Ø.173 [Ø4.39]
  2. HARDWARE IS INCLUDED
  3. MAXIMUM MOUNTING TORQUE: 4 IN-LBS
  4. THIS IS A LEAD FREE PRODUCT
  5. MAXIMUM REFLOW IS 245°C FOR 5 SECONDS

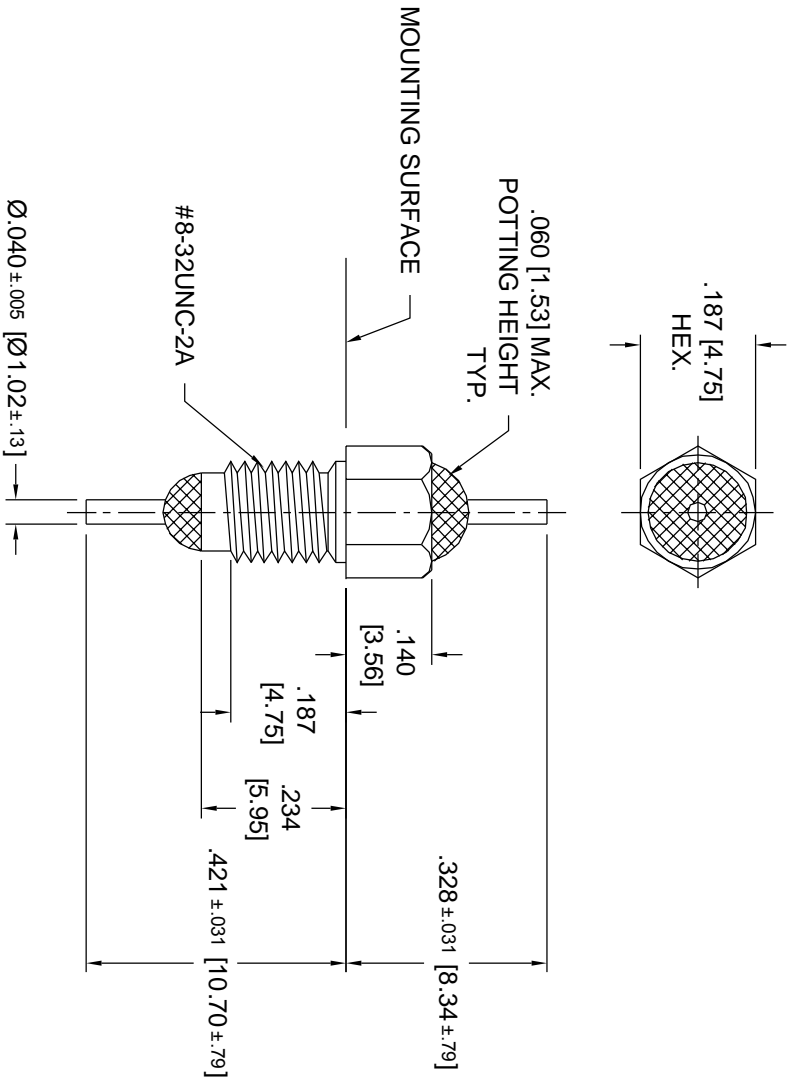

BUSHING FINISH	SILVER
LEAD FINISH	SILVER
CAPACITANCE	.05 uF MIN.
TEMP. RANGE	-55°C TO +125°C
CURRENT	10 AMPS MAX.
WORKING VOLTAGE	125°C, 100 VDC MAX.
DC RESISTANCE	.005 OHMS MAX.

I.L. PER MIL-STD-220 @ 25°C (NO LOAD)	
FREQ. MHZ	I.L. (dB)
1 MHZ	15
100 MHZ	45
1 GHZ	60

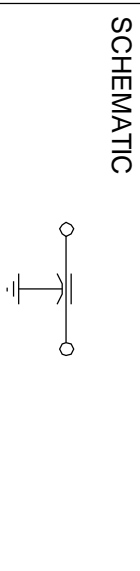

MARKING:  
 PART: SF503P  
 BAG: 54F-785-005  
 DATE CODE  
 QTY. / BAG (200 MAX.)

REV. NO.	00	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES (MILLIMETERS) DO NOT SCALE	TOLERANCES UNLESS OTHERWISE SPECIFIED	FAIRVIEW/ PENNSYLVANIA
CHANGE NOTICE		THIRD ANGLE PROJECTION	Dec. .X ±	
			Dec. .XX ±	
			Dec. .XXX ± .010 [29]	
			Angles ± 0° 30'	Dwn. Hassett Date 2-15-06 Engr. Studen Sheet 1 of 1
			CODE IDENT. NO. 0LSP2	Description: FEED THRU RESIN SEAL FILTER
				54F-785-005



Quality Products From The Specialists In Electro-Magnetic Compatibility