



RS3A THRU RS3M

3.0 AMPS. Fast Recovery Surface Mount Rectifiers



Voltage Range
50 to 1000 Volts
Current
3.0 Amperes


Features

- ✧ For surface mounted application
- ✧ Glass passivated junction chip
- ✧ Built-in strain relief, ideal for automated placement
- ✧ Plastic material used carries Underwriters Laboratory Classification 94V-O
- ✧ Fast switching for high efficiency
- ✧ High temperature soldering:
260°C /10 seconds at terminals

Mechanical Data

- ✧ Cases: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packing: 16mm tape per E1A STD
RS-481
- ✧ Weight: 0.21 gram

SMC/DO-214AB

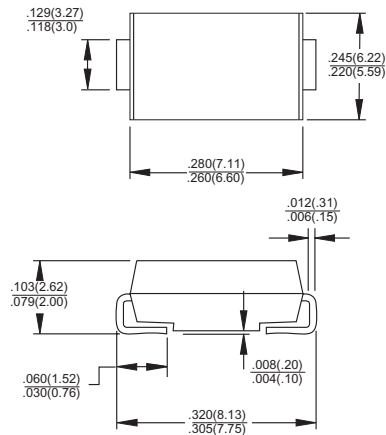

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	RS 3A	RS 3B	RS 3D	RS 3G	RS 3J	RS 3K	RS 3M	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current See Fig. 1 @T _L =75°C	I _(AV)	3.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}	100							A
Maximum Instantaneous Forward Voltage @ 3.0A	V _F	1.3							V
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =125°C	I _R	10 250							uA uA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	150				250	500		nS
Typical Junction Capacitance (Note 2)	C _j	60							pF
Typical Thermal Resistance (Note 3)	R θ _{JA}	50.0							°C/W
	R θ _{JL}	15.0							°C/W
Operating Temperature Range	T _J	-55 to +150							°C
Storage Temperature Range	T _{STG}	-55 to +150							°C

Notes: 1. Reverse Recovery Test Conditions: $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$

2. Measured at 1 MHz and Applied $V_R = 4.0\text{ Volts}$

3. Thermal Resistance from Junction to Ambient and from Junction to Lead Mounted on P.C.B. with 0.6"x0.6" (16 x 16 mm) Copper Pad Areas.

RATINGS AND CHARACTERISTIC CURVES (RS3A THRU RS3M)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

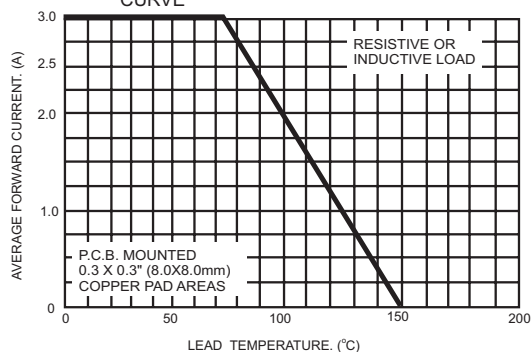


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

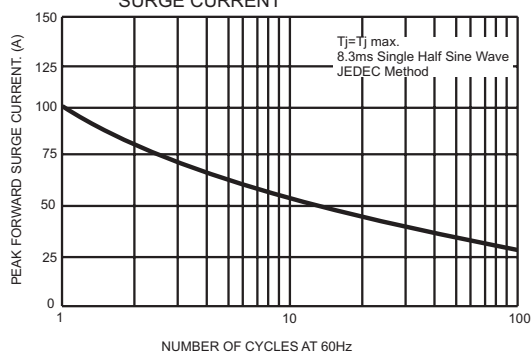


FIG.3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

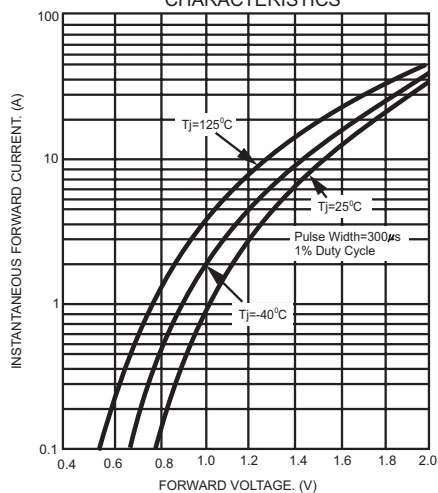


FIG.4- TYPICAL REVERSE CHARACTERISTICS

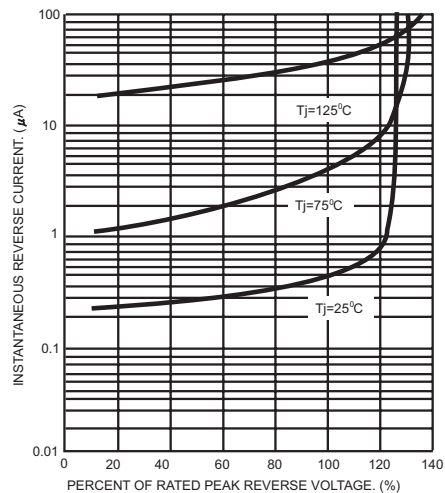


FIG.5- TYPICAL JUNCTION CAPACITANCE

