

Inductors

For General Applications

SMD

NL Series NL4532 Type

FEATURES

- The product has good heat durability that withstands lead-free compatible reflow soldering conditions.
- Lead-free material is used for the plating on the terminal.
- The product uses metal terminals, which realize excellent connection reliability.
- From 1μH to 1000μH, all of the products in the E-12 series are J(±5%) tolerance products.
- This product conforms to the standards that are slated to be introduced under the RoHS Directive.

APPLICATIONS


- Electronic equipment used in communication infrastructures including xDSL and mobile base stations.
- Electronic equipment used in onboard automobile equipment including car audio and ECU systems.
- Audio-visual equipment including TVs and VCRs.
- Other electronic equipment including HDDs and ODDs.

SPECIFICATIONS


Operating temperature range	-40 to +105°C [Including self-temperature rise]
Storage temperature range	-40 to +105°C

RECOMMENDED SOLDERING CONDITIONS

REFLOW SOLDERING

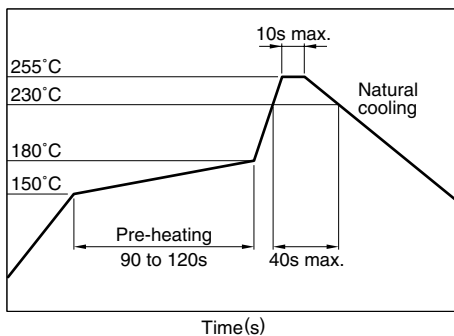

FLOW SOLDERING

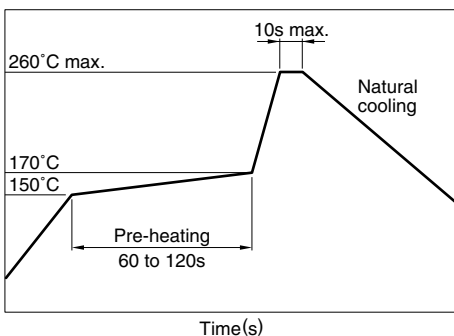

IRON SOLDERING

Tip temperature	300 to 350°C
Heating time	3 seconds/soldering
Soldering rod specifications	Output: 30W Tip diameter: 1mm

- Based on the above conditions, use a maximum product temperature of 260°C and a maximum accumulated heating time of 10 seconds as a guideline.
- Please contact us for details.

PRODUCT IDENTIFICATION

NL	453232	T-	2R2	J	-	PF
(1)	(2)	(3)	(4)	(5)	(6)	

(1)Series name

(2)Dimensions

453232	4.5×3.2×3.2mm (L×W×T)
--------	-----------------------

(3)Packaging style

T	Taping (reel)
---	---------------

(4)Inductance value

1R0	1μH
100	10μH
101	100μH
102	1000μH

(5)Inductance tolerance

J	±5%
---	-----

(6) Lead-free compatible product

PF	Lead-free compatible product
----	------------------------------

PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	500 pieces/reel

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


- All specifications are subject to change without notice.

Inductors

For General Applications
SMD

NL Series NL4532 Type

SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

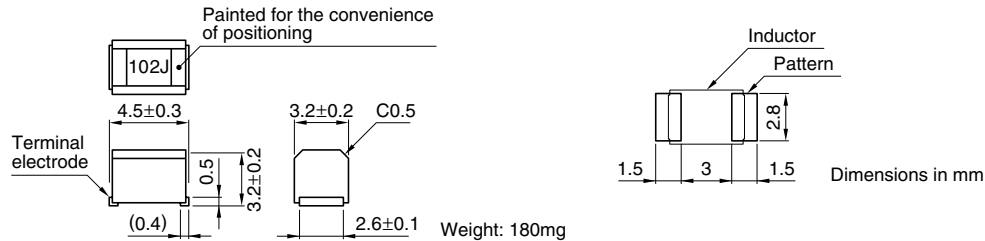

ELECTRICAL CHARACTERISTICS

Inductance (μH)	Inductance tolerance	Q min.	Test frequency L, Q (MHz)	Self-resonant frequency (MHz)min.	DC resistance (Ω)max.	Rated current* (mA)max.	Part No.
1	±5%	50	7.96	100	0.5	450	NL453232T-1R0J-PF
1.2	±5%	50	7.96	80	0.55	430	NL453232T-1R2J-PF
1.5	±5%	50	7.96	70	0.6	410	NL453232T-1R5J-PF
1.8	±5%	50	7.96	60	0.65	390	NL453232T-1R8J-PF
2.2	±5%	50	7.96	55	0.7	380	NL453232T-2R2J-PF
2.7	±5%	50	7.96	50	0.75	370	NL453232T-2R7J-PF
3.3	±5%	50	7.96	45	0.8	355	NL453232T-3R3J-PF
3.9	±5%	50	7.96	40	0.9	330	NL453232T-3R9J-PF
4.7	±5%	50	7.96	35	1	315	NL453232T-4R7J-PF
5.6	±5%	50	7.96	33	1.1	300	NL453232T-5R6J-PF
6.8	±5%	50	7.96	27	1.2	285	NL453232T-6R8J-PF
8.2	±5%	50	7.96	25	1.4	270	NL453232T-8R2J-PF
10	±5%	50	2.52	20	1.6	250	NL453232T-100J-PF
12	±5%	50	2.52	18	2	225	NL453232T-120J-PF
15	±5%	50	2.52	17	2.5	200	NL453232T-150J-PF
18	±5%	50	2.52	15	2.8	190	NL453232T-180J-PF
22	±5%	50	2.52	13	3.2	180	NL453232T-220J-PF
27	±5%	50	2.52	12	3.6	170	NL453232T-270J-PF
33	±5%	50	2.52	11	4	160	NL453232T-330J-PF
39	±5%	50	2.52	10	4.5	150	NL453232T-390J-PF
47	±5%	50	2.52	10	5	140	NL453232T-470J-PF
56	±5%	50	2.52	9	5.5	135	NL453232T-560J-PF
68	±5%	50	2.52	9	6	130	NL453232T-680J-PF
82	±5%	50	2.52	8	7	120	NL453232T-820J-PF
100	±5%	40	0.796	8	8	110	NL453232T-101J-PF
120	±5%	40	0.796	6	8	110	NL453232T-121J-PF
150	±5%	40	0.796	5	9	105	NL453232T-151J-PF
180	±5%	40	0.796	5	9.5	102	NL453232T-181J-PF
220	±5%	40	0.796	4	10	100	NL453232T-221J-PF
270	±5%	40	0.796	4	12	92	NL453232T-271J-PF
330	±5%	40	0.796	3.5	14	85	NL453232T-331J-PF
390	±5%	40	0.796	3	16	80	NL453232T-391J-PF
470	±5%	40	0.796	3	26	62	NL453232T-471J-PF
560	±5%	30	0.796	3	30	50	NL453232T-561J-PF
680	±5%	30	0.796	3	30	50	NL453232T-681J-PF
820	±5%	30	0.796	2.5	35	30	NL453232T-821J-PF
1000	±5%	30	0.252	2.5	40	30	NL453232T-102J-PF

* Rated current: Value obtained when current flows and the temperature has risen to 20°C or when DC current flows and the initial value of inductance has fallen by 10%, whichever is smaller.

- Test equipment L, Q: YHP4194A IMPEDANCE ANALYZER (16085A+16093B+TDK TF-1)
SRF: HP8753C NETWORK ANALYZER (Z_{in}=Z_{out}=50Ω)
Rdc: MATSUSHITA VP-2941A DIGITAL MILLIOHM METER


Inductors

NL Series NL4532 Type


For General Applications
SMD

TYPICAL ELECTRICAL CHARACTERISTICS


INDUCTANCE vs. FREQUENCY CHARACTERISTICS

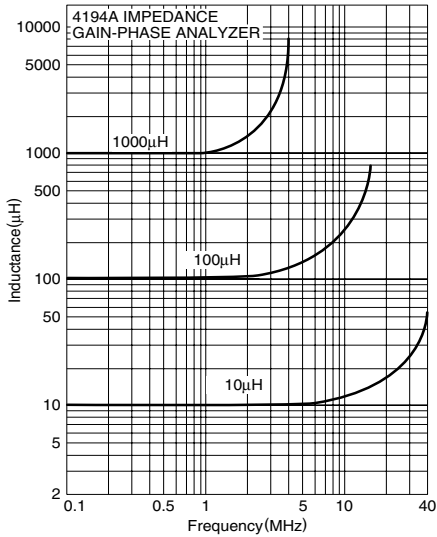


IMPEDANCE vs. FREQUENCY CHARACTERISTICS

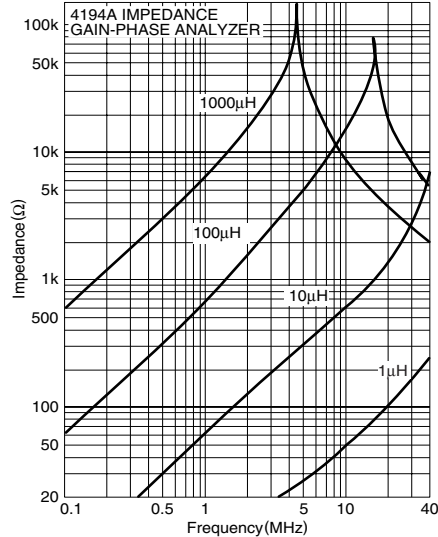

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

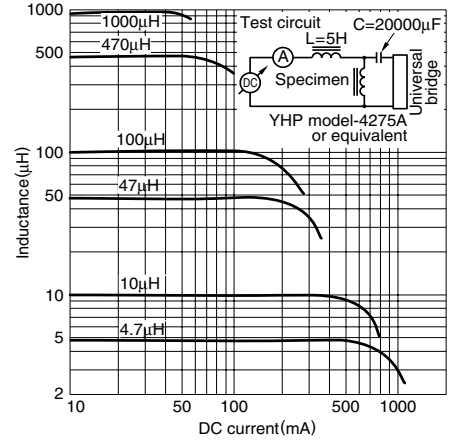

INDUCTANCE CHANGE vs. TEMPERATURE CHARACTERISTICS

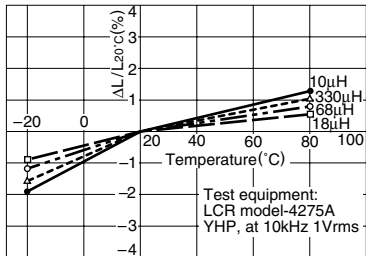

Q vs. FREQUENCY CHARACTERISTICS

