
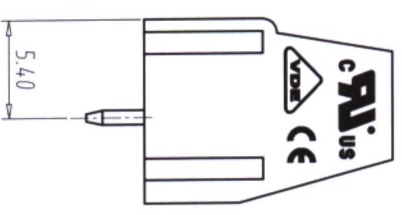
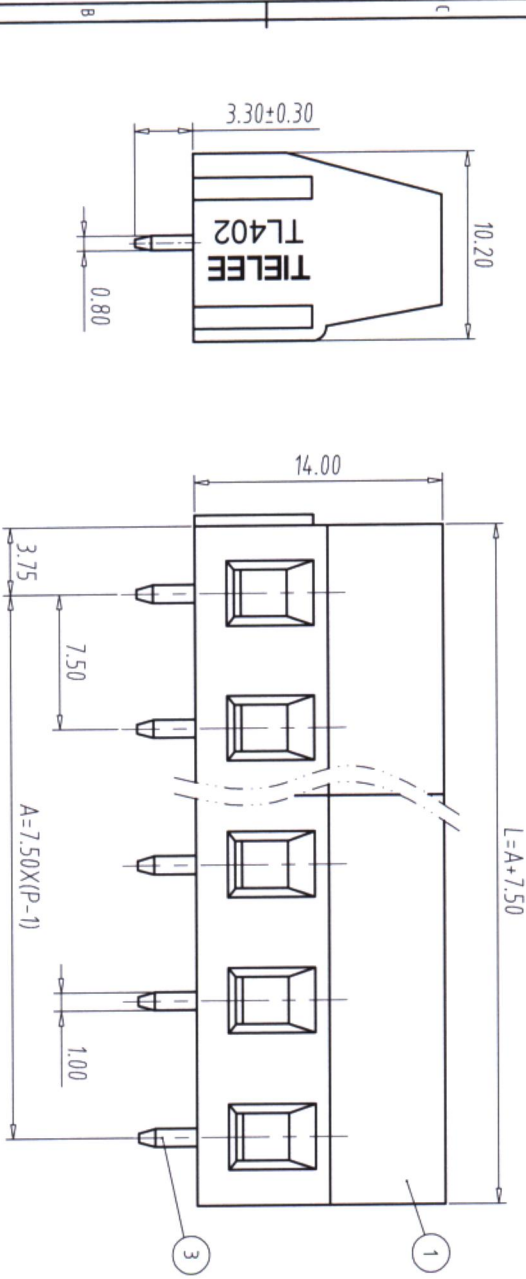


REV	E.C.N NO.	CONTENT	CHK	DATE
V10		ORIGINAL	ZZW	2021.04.12

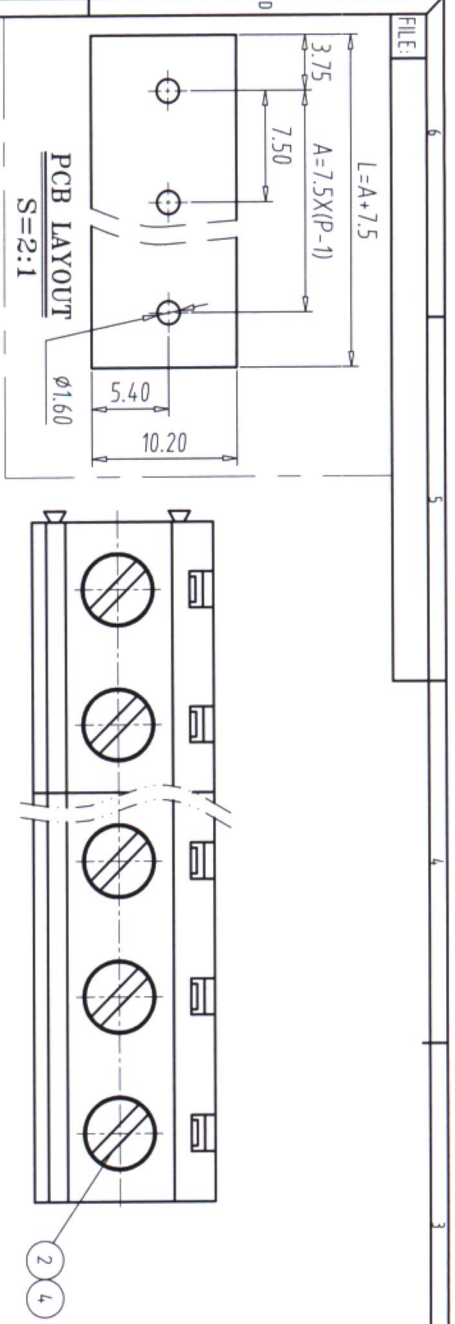

- NOTES:
- UL:
 - Rating:300V,20A;
 - Insulation Withstands Voltage: AC1600V/MIN;
 - Suitable Electric Wire:24AWG~12AWG
 - IEC:
 - Rating:630V,24A;
 - Rate Impulse Voltage:6000V;
 - Insulation Resistance: 500MΩ or more at DC500V;
 - Contact Resistance: ≤5mΩ
 - Material Group: I ;
 - Pollution Degree:2;
 - Overvoltage Category:III;
 - Suitable Electric Wire: 0.2mm²~2.5mm², 4mm² SOL Max;
 - Using Temperature Range:-40℃~+105℃;
 - Screw Torque Value:0.5N • m
 - Strip length:7.0mm
 - RoHS compliance;

DIM	P	2	3	4	5	6	7	8	9	10	11	12	
A		7.50	15.00	22.50	30.00	37.50	45.00	52.50	60.00	67.50	75.00	82.50	
L		15.00	22.50	30.00	37.50	45.00	52.50	60.00	67.50	75.00	82.50	90.00	
DIM	P	13	14	15	16	17	18	19	20	21	22	23	24
A		90.00	97.50	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50
L		97.50	105.00	112.50	120.00	127.50	135.00	142.50	150.00	157.50	165.00	172.50	180.00

Total Pitch Tolerances		Nominal dimension range											
		in mm											
over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	200	250	0	30	53	70	90
to	to	to	to	to	to	to	to	to	to	to	to	to	to
to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	30	53	70	90	115
±0.20	±0.29	±0.30	±0.34	±0.44	±0.55	±0.70	±0.88	±1.00	±0.24	±0.30	±0.34	±0.44	±0.55

4	SCREW	P	STEEL	M3/Zn Plated
3	SCREW	P	Copper Alloy	Tin plated
2	BLOCK	P	Copper Alloy	Ni Plated
1	HOUSING	/	PA66	UL94-V0

DWG	ZZW	DATE	2021.04.12	UNITS	MM	SHEET/OF	1/1
CHK	DATE	2021.04.13	SCALE	25:1	A4		
APP	DATE	2021.4.13	NAME	TL402V-XXP-XS(M3)			