


Attenuators (Continued)

**Singlemode
FC Attenuators, Build Out
Style, Fixed Value**

FC/UPC

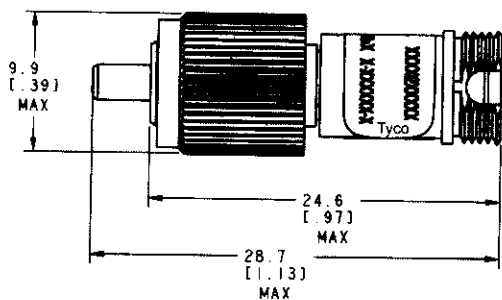

Note: Additional attenuation values available upon request.

Dual Window Attenuators

**Operating Wavelength
1310/1550nm ±25nm**

Attenuation (dB)	Part Number
1	209948-1
2	209948-2
3	209948-3
4	209948-4
5	209948-5
6	209948-6
8	209948-8
9	209948-9
10	1-209948-0
12	1-209948-2
13	1-209948-3
15	1-209948-5
18	1-209948-8
20	2-209948-0
25	2-209948-5

Note: Attenuation Tolerance, Ambient
 ≥ 5 dB: ± .10 x nominal
 attenuation value
 < 5 dB: ± 0.50 dB
 Reflectance ≤ -55 dB

Bandpass Attenuators


**Operating Wavelength
1260-1360nm & 1430-1625nm**

Attenuation (dB)	Part Number
0	9-209285-9
1	209285-1
2	209285-2
3	209285-3
4	209285-4
5	209285-5
6	209285-6
7	209285-7
10	1-209285-0
12	1-209285-2
15	1-209285-5
18	1-209285-8
20	2-209285-0
25	2-209285-5

Note: Attenuation Tolerance, Ambient
 ≥ 5 dB: ± .15 x nominal
 attenuation value
 < 5 dB: ± 0.75 dB
 Reflectance ≤ -55 dB

**Singlemode
FC Attenuators, Build Out
Style, Fixed Value**

FC/APC (8°)

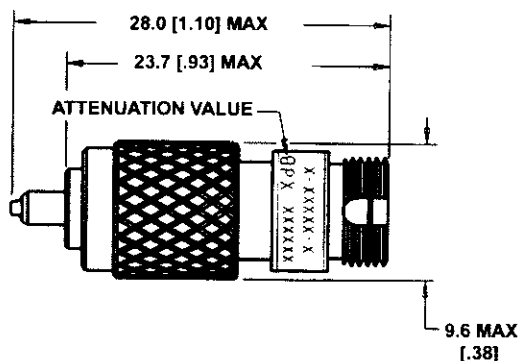

Note: Additional attenuation values available upon request.

Dual Window Attenuators

**Operating Wavelength
1310/1550nm ±25nm**

Attenuation (dB)	Part Number
1	209845-1
2	209845-2
3	209845-3
4	209845-4
5	209845-5
6	209845-6
10	1-209845-0
12	1-209845-2
15	1-209845-5
18	1-209845-8
20	2-209845-0
25	2-209845-5

Note: Attenuation Tolerance, Ambient
 ≥ 5 dB: ± .10 x nominal
 attenuation value
 < 5 dB: ± 0.50 dB
 Reflectance ≤ -60 dB