

Power PCB Relay RPII/2

- 2 pole 8 A, 2 form C (CO) or 2 form A (NO) contacts
- 4 kv/8 mm coil contact
- Twin contacts available





Applications
Domestic appliances, UPS



| Approvals | |
|---|--|
| VDE Cert. No. 40025448, UL E214024 | |
| Technical data of approved types on request | |

| Contact Data | |
|--|---------------------------------|
| Contact configuration | 2 form C (CO) or 2 form A (NO) |
| Rated voltage / max.switching voltage AC | 250 VAC |
| Max. switching voltage | 400 VAC |
| Rated voltage | 8 A (UL: 10A) |
| Limiting making capacity, max 4 s, duty factor 10% | 14 A |
| Breaking capacity max. | 2000 VA |
| Contact material | AgCdO, AgNi0.15 gold flashed |
| Frequency of operation with / without load | 600 / 72000 h ⁻¹ |
| Operate/release time typ. | 9/3 ms |
| Bounce time typ., form A/form B | 2/3 ms |


| Contact ratings | | | |
|-----------------|---------|-------------------------------|---------------------|
| Type | Contact | Load | Cycles |
| IEC61810 | | | |
| RP420/421 | A (NO) | 8A, 250 VAC, resistive, 35°C | 100x10 ³ |
| RP420 | A (NO) | 5A, 250 VAC, resistive, 70°C | 30x10 ³ |
| UL508 | | | |
| RP420 | C (CO) | 10A, 250 VAC, gen. purp, 70°C | 6x10 ³ |



| Coil Data | |
|----------------------------|-------------|
| Coil voltage range | 5 to 110VDC |
| Operative range, IEC 61810 | 2 |

| Coil versions, DC coil | | | | | |
|------------------------|-------------------|---------------------|---------------------|-------------------------------------|---------------------|
| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω±10% ¹⁾ | Rated coil power mW |
| 005 | 5 | 3.5 | 0.5 | 54 | 500 |
| 006 | 6 | 4.2 | 0.6 | 68 | 500 |
| 012 | 12 | 8.4 | 1.2 | 270 | 500 |
| 024 | 24 | 16.8 | 2.4 | 1100 ¹⁾ | 500 |
| 048 | 48 | 33.6 | 4.8 | 4400 ¹⁾ | 500 |
| 060 | 60 | 42.0 | 6.0 | 6540 ¹⁾ | 500 |
| 110 | 110 | 77.0 | 11.0 | 23100 ¹⁾ | 500 |

¹⁾ Coil resistance ±15%.
All figures are given for coil without pre-energization, at ambient temperature +20°C.
Other coil voltages on request.

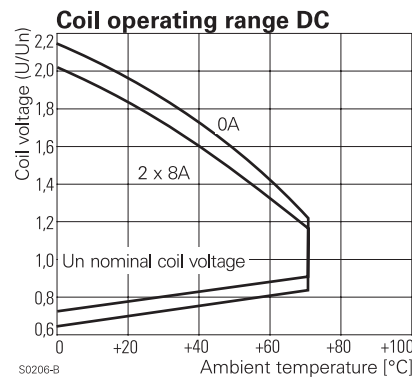

| Insulation Data | |
|------------------------------------|----------------------|
| Initial dielectric strength | |
| coil-contact circuit | 4000V _{rms} |
| open contact circuit | 1000V _{rms} |
| adjacent contact circuits | 2500V _{rms} |
| Clearance/creepage | |
| coil-contact circuit | ≥8/8mm |
| Material group of insulation parts | IIIa |

Power PCB Relay RPII/2 (Continued)


Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter

| | |
|---|---------------------------------------|
| Ambient temperature | -40 to +70°C |
| Category of environmental IEC 61810 | RTII - flux proof, RTIII - wash tight |
| Vibration resistance (functional), form A/form B, 30 to 150Hz | 11/1.5g |
| Shock resistance (destructive) | 100g |
| Terminal type | PCB-THT |
| Resistance to soldering heat THT, IEC 60068-2-20 | |
| flux-proof version | 270°C / 10s |
| wash-tight version | 260°C / 5s |
| Relay weight | 18g |
| Packaging unit | tube/20 pcs., box/500 pcs. |

Dimensions


Dimensions in mm



S0273-AB


PCB layout / terminal assignment

Bottom view on solder pins
Dimensions in mm




S0163-CO

2 form C (CO) contacts



S0163-BJ

2 form A (NO) contacts



S0163-BK

Product code structure

Typical product code **RP 4 2 0 024**

Type

RP Power PCB Relay RPII/2

Version

4 8A, flux proof **8** 8A, wash tight

Contact arrangement

2 2 form C (2 CO) **4** 2 form A (2 NO)

Contact material

1 AgNi0.15 gold flashed **0** AgCdO

Coil

Coil code: please refer to coil versions table

| Product code | Version | Contacts | Cont. material | Pinning | Part number | |
|--------------|----------------|------------------------|----------------|----------|-------------|-----------|
| RP420006 | Flux proof, 8A | 2 form C (CO) contacts | AgCdO | 6VDC | 4-1393234-8 | |
| RP420012 | | | | 12VDC | 5-1393234-0 | |
| RP420024 | | | | 24VDC | 5-1393234-1 | |
| RP420048 | | | | 48VDC | 5-1393234-2 | |
| RP421012 | Wash tight, 8A | 2 form A (NO) contacts | AgNi0.15 | 12VDC | 6-1393234-7 | |
| RP421024 | | | | 24VDC | 6-1393234-8 | |
| RP421110 | | | | 110VDC | 7-1393234-1 | |
| RP820012 | | | | 12VDC | 9-1393234-0 | |
| RP820024 | | | AgCdO | 24VDC | 9-1393234-2 | |
| RP821012 | | | | AgNi0.15 | 12VDC | 1393845-4 |
| RP821024 | | | | | 24VDC | 1393845-5 |

This list represents the most common types and does not show all variants covered by this datasheet. Other types on request.