


**Power Relay T92**

- 2 pole 30 A, 2 CO or 2 NO contacts
- High switching capacity up 30 A / 400 VAC
- DC- or AC coil
- 4 kV / 8 mm coil-contact
- Insulation to VDE 0631 and VDE 0700
- PCB- or quick connect terminals or chassis mount
- Adapter for DIN-rail mounting
- RoHS compliant (Directive 2002/95/EC) as per product date code 0509

**Applications**

Power supplies, heating & ventilation, control equipment

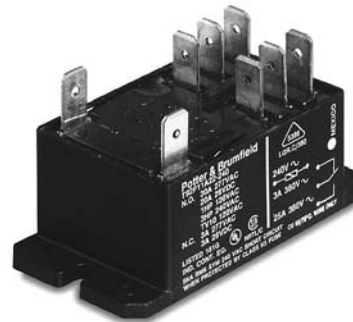

F0167-A

**Approvals**

VDE REG.-Nr. 5386 (addl. mounting version 5 in preparation), E22575, LO15734  
Technical data of approved types on request

**Contact data**

Contact configuration	2 NO contacts	2 CO contacts
Contact set	single contact	
Type of interruption	micro disconnection	
Rated current		
NO contact (PCB / flange mount)	30 / 25 A	30 / 25 A
NC contact		3 A
Rated voltage / max.switching voltage AC	400 / 600 VAC	
Maximum breaking capacity AC, NO / NC contact	12 kVA	12 / 1.2 kVA
Contact material	AgCdO	
Minimum contact load	500mA, 12V	
Mechanical endurance	>5x10 <sup>6</sup> cycles	
Rated frequency of operation with / without load	14 min <sup>-1</sup> / 120 min <sup>-1</sup>	

**Contact ratings**

Type	Load	Cycles
NO contacts, PCB version	30 A @ 400 VAC	1x10 <sup>5</sup>
NO contacts, flange mount version	25 A @ 400 VAC	1x10 <sup>5</sup>
NO / NC contacts, all versions	25 A / 3 A @ 400 VAC	3x10 <sup>4</sup>
NO / NC contacts, all versions	20 A / 3 A @ 28 VDC	1x10 <sup>5</sup>


**Coil data**

Rated coil voltage range DC coil	5...110 VDC
AC coil	24...240 VAC
Coil power DC coil	1700 mW
AC coil	4 VA
Operative range	1


**Coil versions, DC-coil**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ohm	Rated coil power mW
12	12	9.0	1.2	86±10%	1674
24	24	18.0	2.4	350±10%	1646
48	48	36.0	4.8	1390±10%	1658
110	110	83.0	11.0	7255±10%	1668

All figures are given for coil without preenergization, at ambient temperature +23°C  
Other coil voltages on request

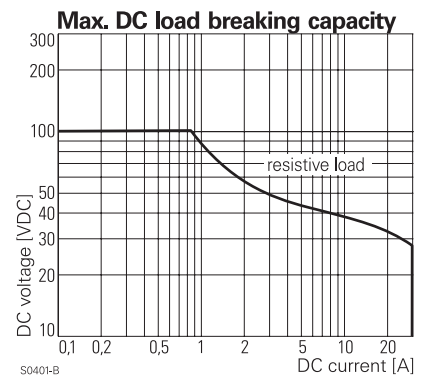

S0401-B

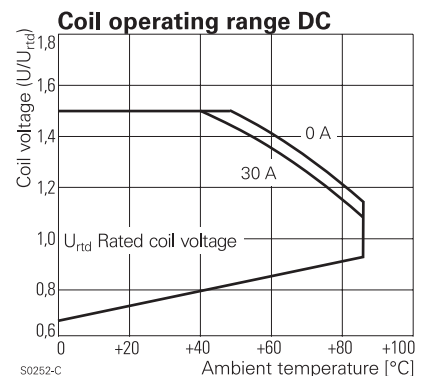

S0252-C

**Coil versions, AC-coil 50/60 Hz**

Coil code	Rated voltage VAC	Frequ. Hz	Operate voltage VAC	Release voltage VAC	DC-coil resistance Ohm	Rated coil power VA
24	24	60	19.2	2.4	44 ± 10%	4
120	110/120	50/60	96.0	12.0	950 ± 10%	4
240	220/240	50/60	192.0	24.0	3800 ± 10%	4

All figures are given for coil without preenergization, at ambient temperature +23°C  
Other coil voltages on request

**Insulation**


Insulation resistance coil-contact circuit	< 10 <sup>9</sup> Ohms
Dielectric strength coil-contact circuit	4000 V <sub>rms</sub>
open contact circuit	1500 V <sub>rms</sub>
adjacent contact circuits	2000 V <sub>rms</sub>
Clearance / creepage coil-contact circuit	≥ 8 / 9.5 mm
Tracking index of relay base	PTI 100M
Insulation to IEC 60664-1, VDE 0110b (2/79)	
Type of insulation coil-contact circuit	basic
open contact circuit	functional
adjacent contact circuits	basic
Rated insulation voltage	400 V
Pollution degree	2
Rated voltage system	400/600 V
Overvoltage category	III

**Other data**


RoHS - Directive 2002/95/EC	compliant per product date code 0509
Flammability class according to UL94	V-0
Ambient temperature range DC-coil	-40...+85°C
AC-coil	-40...+65°C
Operate- / release time	15 ms / 10 ms
Bounce time NO / NC contact	10 ms / 15 ms
Vibration resistance (function) NO / NC contact	1.65 mm, 10...55 Hz
Shock resistance (function) NO / NC contact	10 g, 11 ms half sine
Shock resistance (destruction)	100 g, 11 ms half sine
Category of protection	RT I (dust protected) RT III (wash tight)
Relay weight	86 g
Packaging unit	30 pcs

**Dimensions**

PCB version

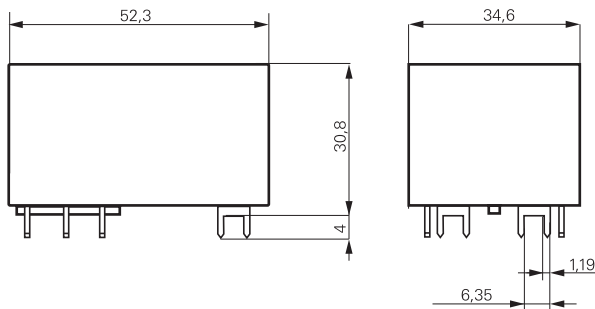



**Coil operating range AC**

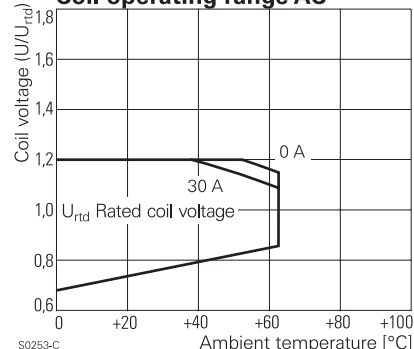

**PCB layout / terminal assignment**

Bottom view on solder pins

PCB version

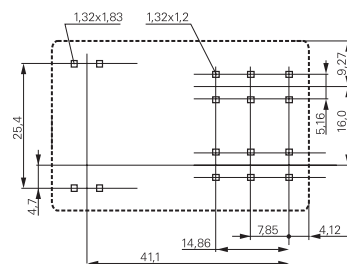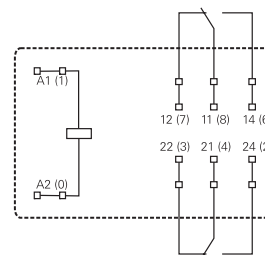

Only necessary terminals are present on 2 NO models.

