

## Aluminum Capacitors Power Eurodin Printed Wiring


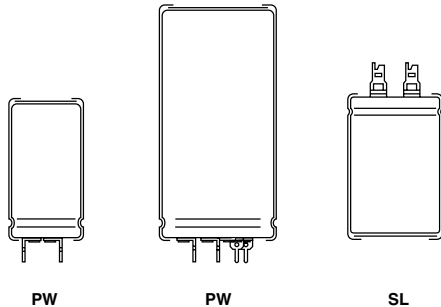


Fig.1 Component outlines



### FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, cylindrical aluminum case, insulated with a blue sleeve
- Provided with keyed polarity
- 050 series also available in solder-lug (SL) versions
- Very long useful life:  
15 000 hours at 85 °C
- Low ESR, high ripple current capability
- High resistance to shock and vibration



**RoHS\***  
COMPLIANT

### APPLICATIONS

- Computer, telecommunication and industrial systems
- Smoothing and filtering
- Standard and switched mode power supplies
- Energy storage in pulse systems

### MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in  $\mu\text{F}$ )
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (Q for - 10/+ 30 %)
- Rated voltage (in V)
- Date code (YYMM)
- Name of manufacturer
- Code for factory of origin
- Polarity of the terminals and '-' sign to indicate the negative terminal, visible from the top and/or side of the capacitor
- Code number
- Climatic category in accordance with IEC 60068


QUICK REFERENCE DATA		
DESCRIPTION	VALUE	
	050	052
Nominal case size ( $\varnothing D \times L$ in mm)	25 × 30 to 40 × 100	
Rated capacitance range (E6 series), $C_R$	470 to 68 000 $\mu\text{F}$	47 to 1000 $\mu\text{F}$
Tolerance on $C_R$	- 10 to + 30 %	
Rated voltage range, $U_R$	10 to 100 V	250 to 400 V
Category temperature range	- 40 to + 85 °C	
Endurance test at 85 °C	5000 hours	
Useful life at 85 °C	15 000 hours	
Useful life at 40 °C, $1.4 \times I_R$ applied	250 000 hours	
Shelf life at 0 V, 85 °C	500 hours	
Based on sectional specification	IEC 60384-4/EN130300	
Climatic category IEC 60068	40/085/56	

SELECTION CHART FOR $C_R$ , $U_R$ AND RELEVANT NOMINAL CASE SIZES FOR 050 SERIES ( $\varnothing D \times L$ in mm)						
$C_R$ ( $\mu\text{F}$ )	$U_R$ (V)					
	10	16	25	40	63	100
470	-	-	-	-	-	25 × 30
680	-	-	-	-	-	25 × 40
1000	-	-	-	-	25 × 30	30 × 40
1500	-	-	-	25 × 30	25 × 40	35 × 40
2200	-	-	25 × 30	25 × 40	30 × 40	35 × 50
	-	-	-	-	-	40 × 40
3300	-	25 × 30	25 × 40	30 × 40	35 × 40	40 × 50
4700	25 × 30	25 × 40	30 × 40	35 × 40	35 × 50	40 × 70
	-	-	-	-	40 × 40	-
6800	25 × 40	30 × 40	35 × 40	35 × 50	40 × 50	40 × 100
	-	-	-	40 × 40	-	-
10 000	30 × 40	35 × 40	35 × 50	40 × 50	40 × 70	-
	-	-	40 × 40	-	-	-
15 000	35 × 40	35 × 50	40 × 50	40 × 70	40 × 100	-
	-	40 × 40	-	-	-	-
22 000	35 × 50	40 × 50	40 × 70	40 × 100	-	-
	40 × 40	-	-	-	-	-
33 000	40 × 50	40 × 70	40 × 100	-	-	-
47 000	40 × 70	40 × 100	-	-	-	-
68 000	40 × 100	-	-	-	-	-

\* Pb containing terminations are not RoHS compliant, exemptions may apply


<b>SELECTION CHART FOR <math>C_R</math>, <math>U_R</math> AND RELEVANT NOMINAL CASE SIZES FOR 052 SERIES (<math>\varnothing D \times L</math> in mm)</b>			
$C_R$ ( $\mu F$ )	$U_R$ (V)		
	250	385	400
47	-	25 × 30	25 × 30
68	-	25 × 40	25 × 40
100	25 × 30	30 × 40	30 × 40
150	25 × 40	35 × 40	35 × 40
220	30 × 40	35 × 50	35 × 50
330	-	40 × 40	40 × 40
470	35 × 40	40 × 50	40 × 50
680	35 × 50	40 × 70	40 × 70
1000	40 × 40	-	-
	40 × 50	-	40 × 100
	40 × 70	-	-

**DIMENSIONS** in millimeters **AND AVAILABLE FORMS**

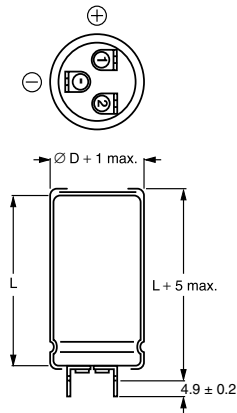


Case  $\varnothing D = 25$  mm

Fig.2 Printed wiring pin version

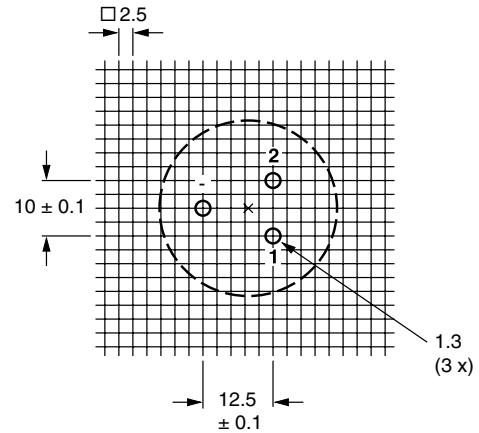


Case  $\varnothing D = 25$  mm

Fig.3 Mounting hole diagram viewed from component side

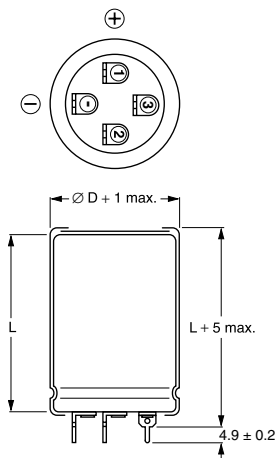


Case  $\varnothing D = 30$  mm

Fig.4 Printed wiring pin version

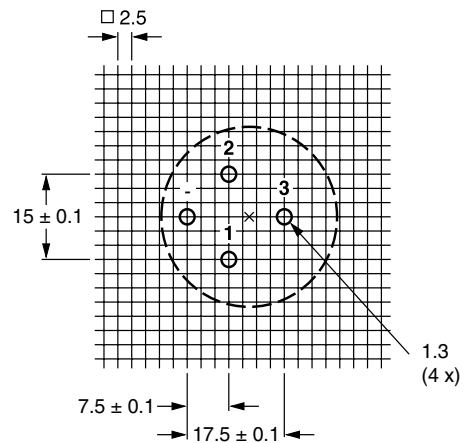


Case  $\varnothing D = 30$  mm


Fig.5 Mounting hole diagram viewed from component side

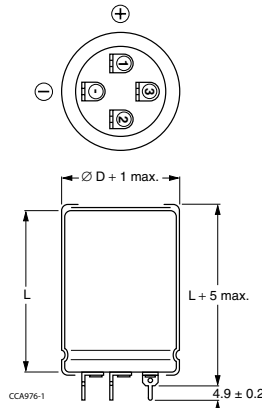


Case  $\varnothing D = 35 \text{ mm}$ .  
Fig.6 Printed wiring pin version.

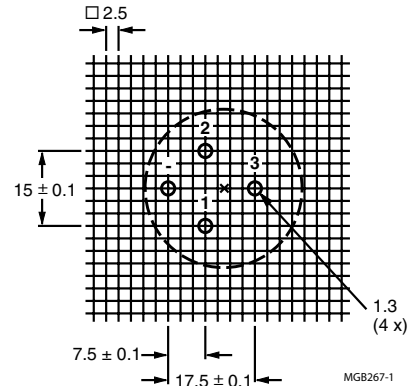

Case  $\varnothing D = 35 \text{ mm}$ .  
Fig.7 Mounting hole diagram viewed from component side.

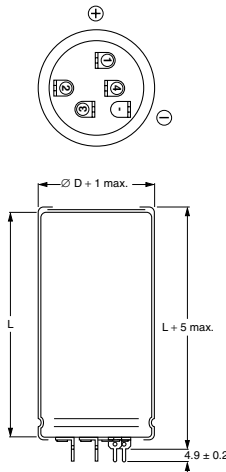

Case  $\varnothing D = 40 \text{ mm}$   
Fig.8 Printed wiring pin version

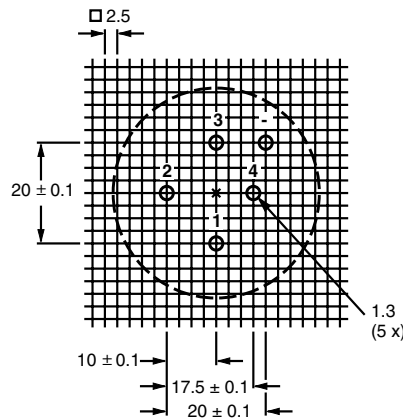

Case  $\varnothing D = 40 \text{ mm}$   
Fig.9 Mounting hole diagram viewed from component side

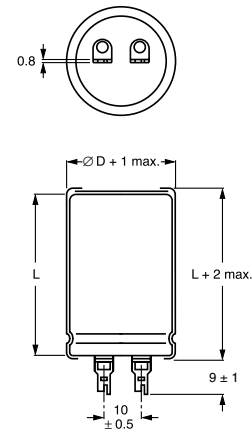


Fig.10 Solder-lug version (SL); only available in 050 series

**MOUNTING**

When a number of capacitors are connected in a bank, they must not be closer together than 15 mm, when no derating of ripple current and/or temperature is applied.

Pin numbers 2, 3 and 4 (if present) must be free from the electrical circuit.

Table 1

DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES						
NOMINAL CASE SIZE $\varnothing D \times L$	$\varnothing D_{\text{max}}$	$L_{\text{max}}$ SL VERSIONS	$L_{\text{max}}$ PW VERSIONS	MASS (g)	PACKAGING QUANTITIES (units per box)	CARDBOARD BOX DIMENSIONS L X W X H
25 x 30	26	32	35	≈ 24	100	290 x 280 x 50
25 x 40	26	42	45	≈ 28	100	290 x 280 x 60
30 x 40	31	42	45	≈ 38	100	340 x 330 x 60
35 x 40	36	42	45	≈ 51	50	390 x 198 x 60
35 x 50	36	52	55	≈ 66	50	390 x 198 x 70
40 x 40 <sup>1</sup>	41	-	45	≈ 78	50	440 x 223 x 60
40 x 50	41	52	55	≈ 82	50	440 x 223 x 70
40 x 70	41	72	75	≈ 110	25	230 x 230 x 90
40 x 100	41	102	105	≈ 176	25	230 x 230 x 120

**Note**

1. Not available in SL versions.



ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C <sub>R</sub>	rated capacitance at 100 Hz
I <sub>R</sub>	rated RMS ripple current at 100 Hz, 85 °C or at 20 kHz, 70 °C
I <sub>L1</sub>	max. leakage current after 1 minute at U <sub>R</sub>
I <sub>L5</sub>	max. leakage current after 5 minutes at U <sub>R</sub>
ESR	max. equivalent series resistance at 100 Hz
Z	max. impedance at 10 kHz

**ORDERING EXAMPLE\***

Electrolytic capacitor 050 series

10 000 µF/25 V; - 10/+ 30 %

Nominal case size: Ø 35 × 50 mm; PW version

Catalog number: 2222 050 56103

\*Note: To ensure delivery of lead (Pb)-free parts during the transition period, please contact your Vishay sales agent.

**Note**

- Unless otherwise specified, all electrical values in Tables 2 and 3 apply at T<sub>amb</sub> = 20 °C, P = 86 to 106 kPa, RH = 45 to 75 %.

Table 2

ELECTRICAL DATA AND ORDERING INFORMATION FOR 050 SERIES										
U <sub>R</sub> (V)	C <sub>R</sub> 100 Hz (µF)	NOMINAL CASE SIZE Ø D × L (mm)	I <sub>R</sub> 100 Hz 85 °C (A)	I <sub>R</sub> 20 kHz 70 °C (A)	I <sub>L1</sub> 1 min (mA)	I <sub>L5</sub> 5 min (mA)	ESR 100 Hz (mΩ)	Z 10 kHz (mΩ)	CATALOG NUMBER SL 2222 050 .....	CATALOG NUMBER PW 2222 050 .....
10	4700	25 × 30	2.4	4.6	0.28	0.10	74	50	14472	54472
	6800	25 × 40	3.2	6.1	0.41	0.14	51	37	14682	54682
	10 000	30 × 40	3.8	7.2	0.60	0.20	39	29	14103	54103
	15 000	35 × 40	4.1	7.8	0.90	0.30	35	26	14153	54153
	22 000	35 × 50	5.0	9.5	1.32	0.44	27	21	14223	54223
	22 000	40 × 40	4.2	8.0	1.32	0.44	36	27	not available	44223
	33 000	40 × 50	5.0	9.5	1.98	0.66	29	22	14333	54333
	47 000	40 × 70	6.8	12.9	2.82	0.94	20	17	14473	54473
68 000	40 × 100	9.2	17.5	4.08	1.36	15	14	14683	54683	
16	3300	25 × 30	2.4	4.6	0.32	0.11	75	50	15332	55332
	4700	25 × 40	3.1	5.9	0.45	0.15	52	37	15472	55472
	6800	30 × 40	3.7	7.0	0.65	0.22	40	30	15682	55682
	10 000	35 × 40	4.1	7.8	0.96	0.32	36	27	15103	55103
	15 000	35 × 50	5.0	9.5	1.44	0.48	28	21	15153	55153
	15 000	40 × 40	4.2	8.0	1.44	0.48	36	27	not available	45153
	22 000	40 × 50	5.0	9.5	2.12	0.71	29	22	15223	55223
	33 000	40 × 70	6.7	12.7	3.17	1.06	20	17	15333	55333
47 000	40 × 100	9.1	17.3	4.51	1.51	15	14	15473	55473	
25	2200	25 × 30	2.3	4.4	0.33	0.11	78	52	16222	56222
	3300	25 × 40	3.1	5.9	0.49	0.17	53	38	16332	56332
	4700	30 × 40	3.7	7.0	0.70	0.24	42	31	16472	56472
	6800	35 × 40	4.1	7.8	1.02	0.34	37	28	16682	56682
	10 000	35 × 50	5.0	9.5	1.50	0.50	28	21	16103	56103
	10 000	40 × 40	4.2	8.0	1.50	0.50	36	27	not available	46103
	15 000	40 × 50	5.0	9.5	2.25	0.75	29	22	16153	56153
	22 000	40 × 70	6.8	12.9	3.30	1.10	20	17	16223	56223
33 000	40 × 100	9.2	17.5	4.95	1.65	15	14	16333	56333	
40	1500	25 × 30	2.0	3.8	0.36	0.12	112	68	17152	57152
	2200	25 × 40	2.7	5.1	0.53	0.18	76	51	17222	57222
	3300	30 × 40	3.3	6.3	0.79	0.27	57	41	17332	57332
	4700	35 × 40	3.8	7.2	1.13	0.38	48	35	17472	57472
	6800	35 × 50	4.7	8.9	1.64	0.55	36	27	17682	57682
	6800	40 × 40	4.1	7.8	1.64	0.55	45	33	not available	47682
	10 000	40 × 50	4.9	9.3	2.40	0.80	35	27	17103	57103
	15 000	40 × 70	6.6	12.5	3.60	1.20	25	20	17153	57153
22 000	40 × 100	9.0	17.1	5.28	1.76	18	16	17223	57223	

<b>ELECTRICAL DATA AND ORDERING INFORMATION FOR 050 SERIES</b>										
$U_R$ (V)	$C_R$ 100 Hz ( $\mu$ F)	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	$I_R$ 100 Hz 85 °C (A)	$I_R$ 20 kHz 70 °C (A)	$I_{L1}$ 1 min (mA)	$I_{L5}$ 5 min (mA)	ESR 100 Hz (m $\Omega$ )	Z 10 kHz (m $\Omega$ )	CATALOG NUMBER SL 2222 050 .....	CATALOG NUMBER PW 2222 050 .....
63	1000	25 × 30	1.8	3.4	0.38	0.13	122	74	18102	58102
	1500	25 × 40	2.5	4.7	0.57	0.19	83	54	18152	58152
	2200	30 × 40	3.1	5.9	0.83	0.28	57	41	18222	58222
	3300	35 × 40	3.6	6.8	1.25	0.42	48	35	18332	58332
	4700	35 × 50	4.4	8.3	1.78	0.60	36	27	18472	58472
	4700	40 × 40	3.8	7.2	1.78	0.60	45	33	not available	48472
	6800	40 × 50	4.7	8.9	2.57	0.86	35	27	18682	58682
	10 000	40 × 70	6.2	11.8	3.78	1.26	25	20	18103	58103
15 000	40 × 100	8.5	16.1	5.67	1.89	18	16	18153	58153	
100	470	25 × 30	1.4	2.7	0.28	0.10	247	172	19471	59471
	680	25 × 40	1.9	3.6	0.41	0.14	170	116	19681	59681
	1000	30 × 40	2.5	4.7	0.60	0.20	123	88	19102	59102
	1500	35 × 40	3.1	5.8	0.90	0.30	94	71	19152	59152
	2200	35 × 50	3.9	7.4	1.32	0.44	69	55	19222	59222
	2200	40 × 40	3.6	6.8	1.32	0.44	81	65	not available	49222
	3300	40 × 50	4.6	8.7	1.98	0.66	59	48	19332	59332
	4700	40 × 70	6.2	11.7	2.82	0.94	42	36	19472	59472
6800	40 × 100	8.2	15.5	4.08	1.36	32	28	19682	59682	


Table 3

<b>ELECTRICAL DATA AND ORDERING INFORMATION FOR 052 SERIES</b>										
$U_R$ (V)	$C_R$ 100 Hz ( $\mu$ F)	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	$I_R$ 100 Hz 85 °C (A)	$I_R$ 20 kHz 70 °C (A)	$I_{L1}$ 1 min (mA)	$I_{L5}$ 5 min (mA)	ESR 100 Hz (m $\Omega$ )	Z 10 kHz (m $\Omega$ )	CATALOG NUMBER 2222 ... ..	
250	100	25 × 30	0.6	1.15	0.15	0.05	1800	1300	052 53101	
	150	25 × 40	0.8	1.5	0.23	0.08	1100	850	052 53151	
	220	30 × 40	1.0	1.9	0.33	0.11	750	550	052 53221	
	330	35 × 40	1.4	2.65	0.49	0.17	500	400	052 53331	
	470	35 × 50	1.8	3.4	0.70	0.24	360	290	052 53471	
	470	40 × 40	1.8	3.4	0.70	0.24	420	350	052 43471	
	680	40 × 50	2.3	4.4	1.02	0.34	250	190	052 53681	
	1000	40 × 70	3.0	5.7	1.50	0.50	170	140	052 53102	
385	47	25 × 30	0.5	0.94	0.11	0.04	2370	1550	052 58479	
	68	25 × 40	0.67	1.27	0.16	0.06	1640	1100	052 58689	
	100	30 × 40	0.84	1.59	0.23	0.08	1275	950	052 58101	
	150	35 × 40	1.13	2.14	0.34	0.11	850	635	052 58151	
	220	35 × 50	1.48	2.8	0.50	0.17	580	430	052 58221	
	220	40 × 40	1.48	2.8	0.50	0.17	580	430	052 48221	
	330	40 × 50	1.97	3.73	0.75	0.25	385	300	052 58331	
	470	40 × 70	2.7	5.11	1.06	0.36	270	215	052 58471	
400	47	25 × 30	0.47	0.89	0.11	0.04	2700	2125	052 56479	
	68	25 × 40	0.63	1.29	0.16	0.06	1875	1470	052 56689	
	100	30 × 40	0.84	1.59	0.24	0.08	1275	1000	052 56101	
	150	35 × 40	1.13	2.14	0.36	0.12	850	665	052 56151	
	220	35 × 50	1.41	2.67	0.52	0.17	650	450	052 56221	
	220	40 × 40	1.41	2.67	0.52	0.17	650	450	052 46221	
	330	40 × 50	1.86	3.52	0.79	0.26	435	315	052 56331	
	470	40 × 70	2.54	4.81	1.12	0.37	305	225	052 56471	
680	40 × 100	3.56	6.75	1.63	0.54	210	155	052 56681		



ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
<b>Voltage</b>		
Surge voltage	≤ 250 V versions	$U_s = 1.15 \times U_R$
	≥ 385 V versions	$U_s = 1.1 \times U_R$
Reverse voltage		$U_{rev} \leq 1 \text{ V}$
<b>Current</b>		
Leakage current	after 1 minute at $U_R$	$I_{L1} \leq 0.006 C_R \times U_R + 4 \mu\text{A}$
	after 5 minutes at $U_R$	$I_{L5} \leq 0.002 C_R \times U_R + 4 \mu\text{A}$
<b>Inductance</b>		
Equivalent series inductance (ESL)	case $\varnothing D = 25 \text{ mm}$	max. 25 nH
	case $\varnothing D = 30 \text{ and } 35 \text{ mm}$	max. 30 nH
	case $D = 40 \text{ mm}$	max. 35 nH


**CAPACITANCE (C)**

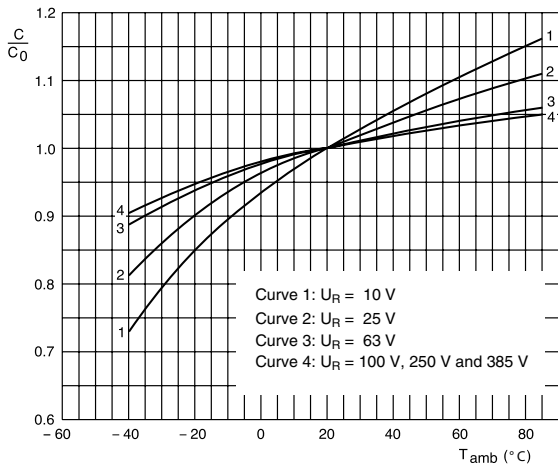

$C_0$  = capacitance at 20 °C, 100 Hz


Fig.11 Typical multiplier of capacitance as a function of ambient temperature

**EQUIVALENT SERIES RESISTANCE (ESR)**

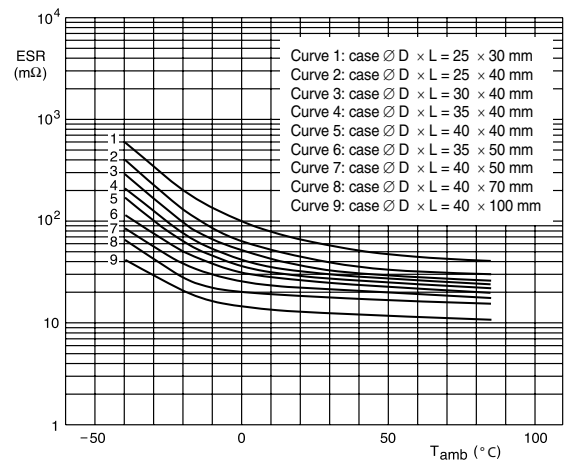


ESR at 100 Hz and  $U_R = 10 \text{ V}$

Fig.12 Typical ESR as a function of temperature

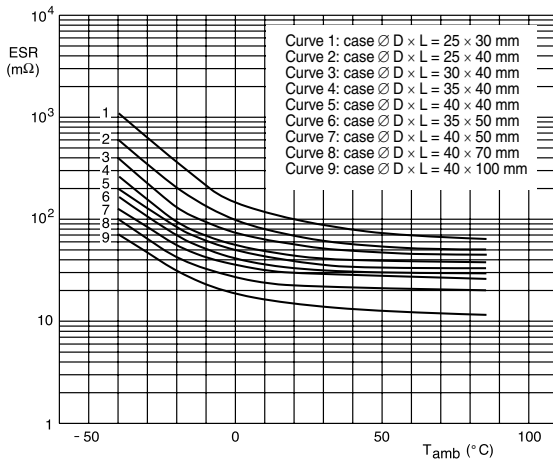

ESR at 100 Hz and  $U_R = 63 \text{ V}$

Fig.13 Typical ESR as a function of temperature

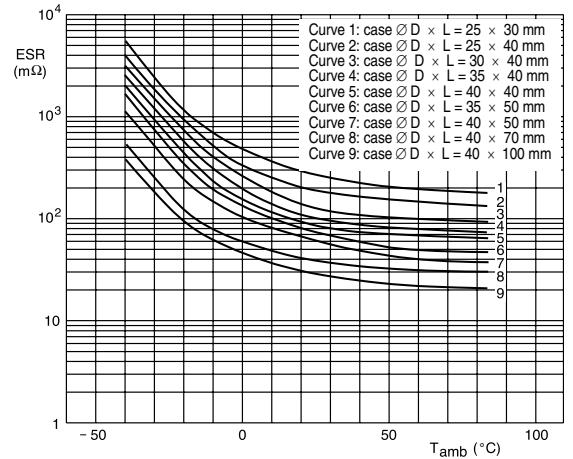


ESR at 100 Hz and  $U_R = 100 \text{ V}$

Fig.14 Typical ESR as a function of temperature




**EQUIVALENT SERIES RESISTANCE (ESR)**

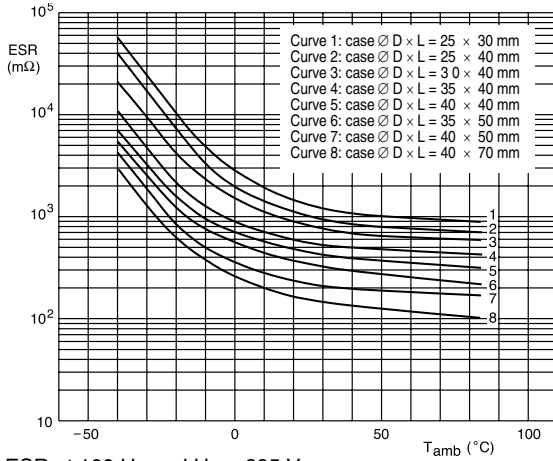

ESR at 100 Hz and  $U_R = 385$  V


Fig.15 Typical ESR as a function of temperature

**IMPEDANCE (Z)**

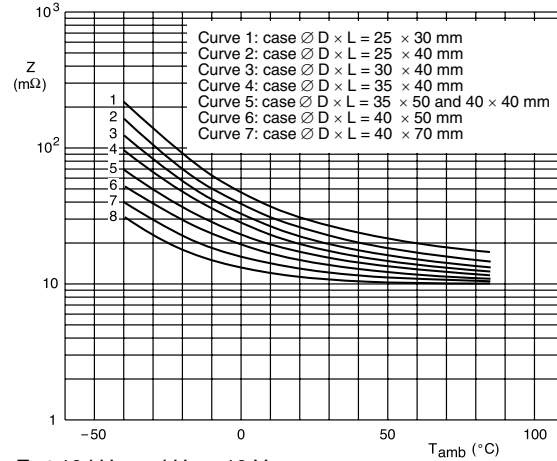


Z at 10 kHz and  $U_R = 10$  V

Fig.16 Typical impedance as a function of temperature

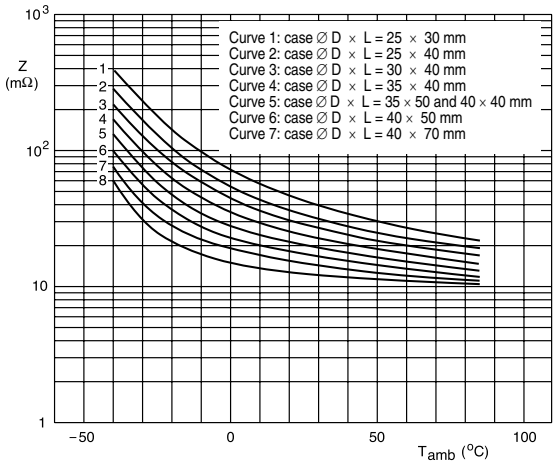


Z at 10 kHz and  $U_R = 63$  V

Fig.17 Typical impedance as a function of temperature

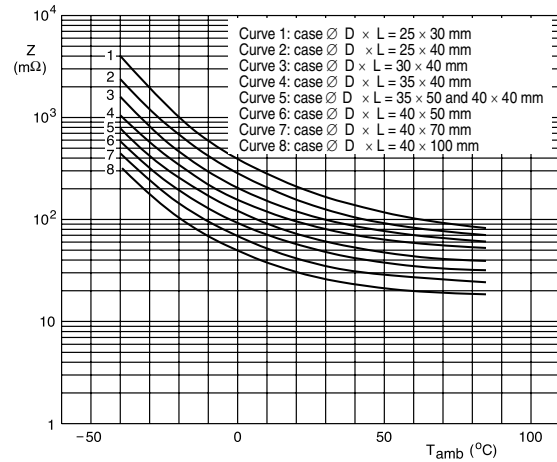


Z at 10 kHz and  $U_R = 100$  V

Fig.18 Typical impedance as a function of temperature

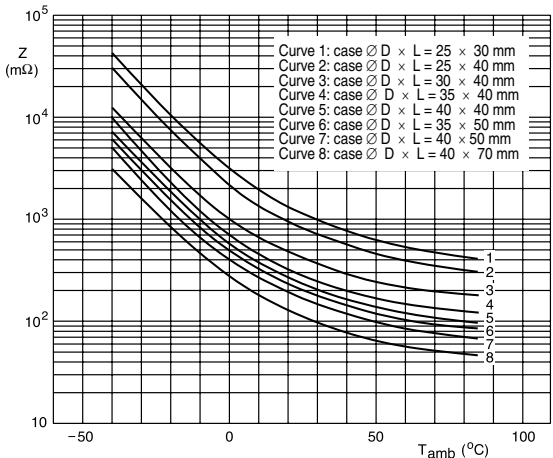

Z at 10 kHz and  $U_R = 385$  V

Fig.19 Typical impedance as a function of temperature

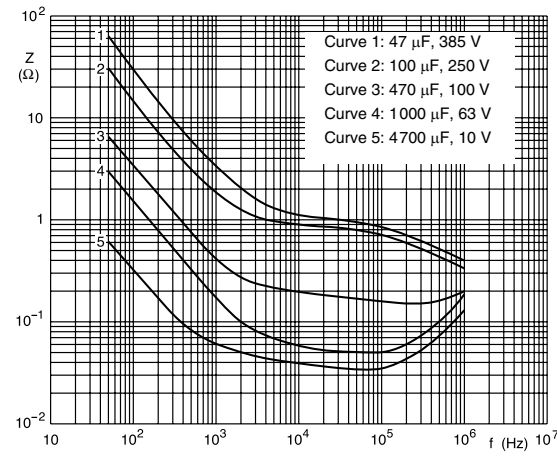

Case  $\varnothing$  D x L = 25 x 30 mm

Fig.20 Typical impedance as a function of frequency



**IMPEDANCE (Z)**

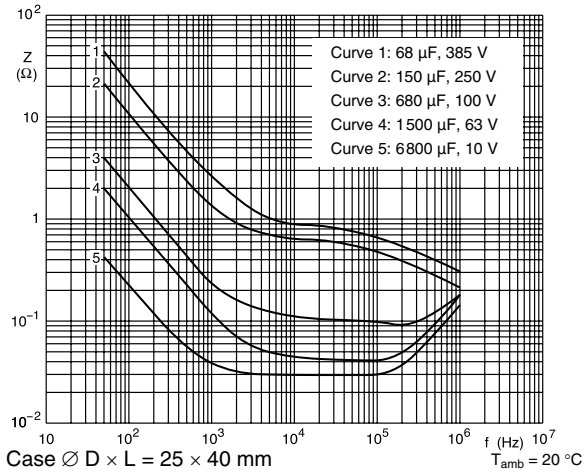


Fig.21 Typical impedance as a function of frequency

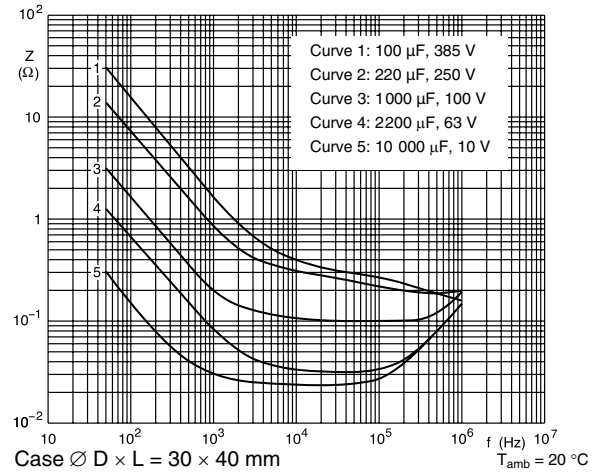


Fig.22 Typical impedance as a function of frequency

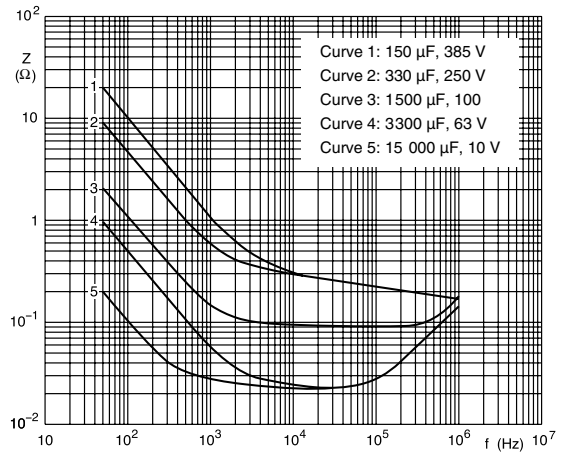


Fig.23 Typical impedance as a function of frequency

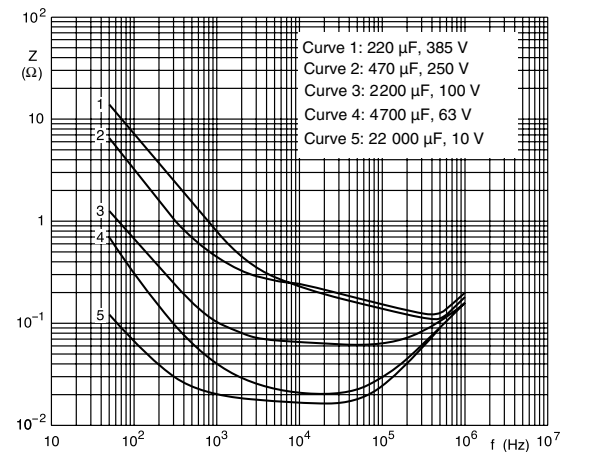


Fig.24 Typical impedance as a function of frequency

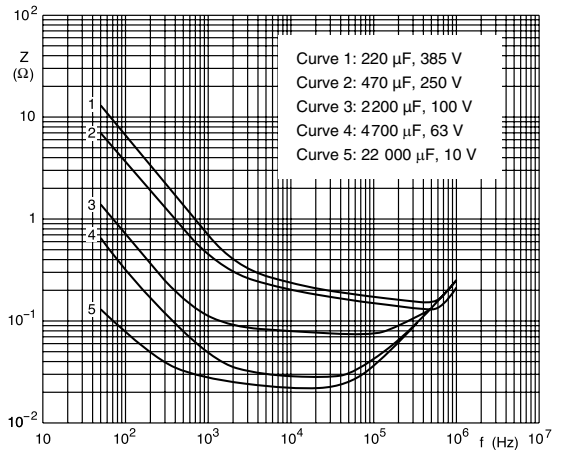


Fig.25 Typical impedance as a function of frequency



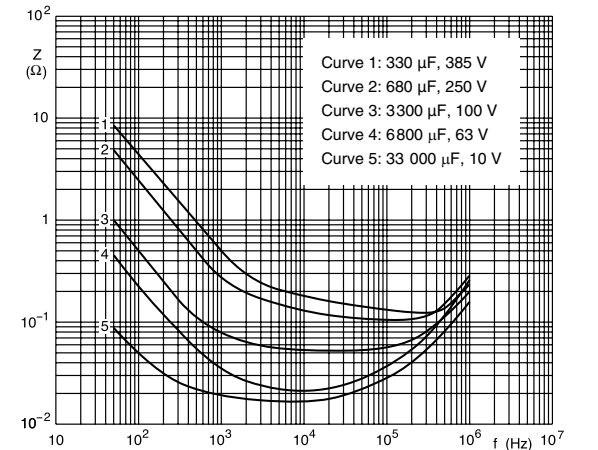


Fig.26 Typical impedance as a function of frequency

**IMPEDANCE (Z)**

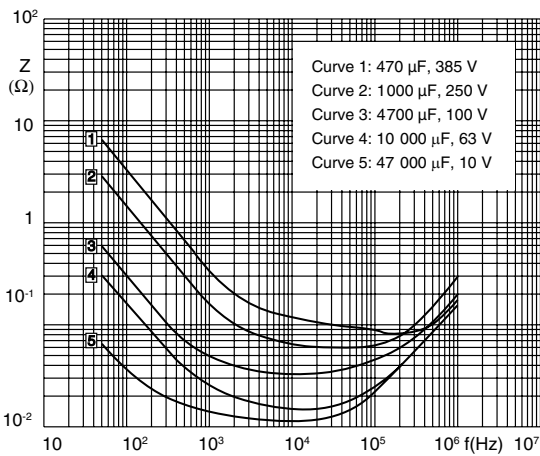


Case Ø D x L = 40 x 70 mm T<sub>amb</sub> = 20 °C  
Fig.27 Typical impedance as a function of frequency

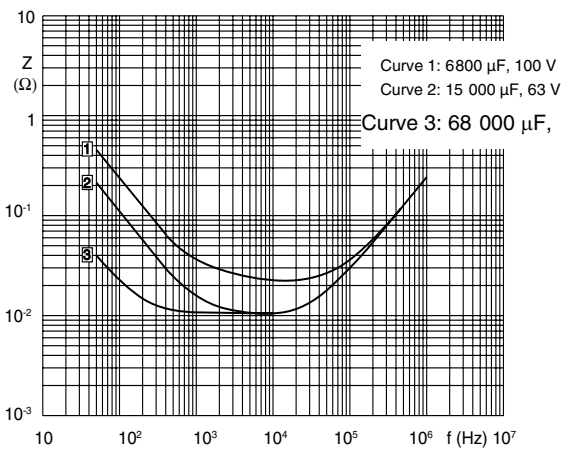

Case Ø D x L = 40 x 100 mm T<sub>amb</sub> = 20 °C  
Fig.28 Typical impedance as a function of frequency.

**RIPPLE CURRENT AND USEFUL LIFE**

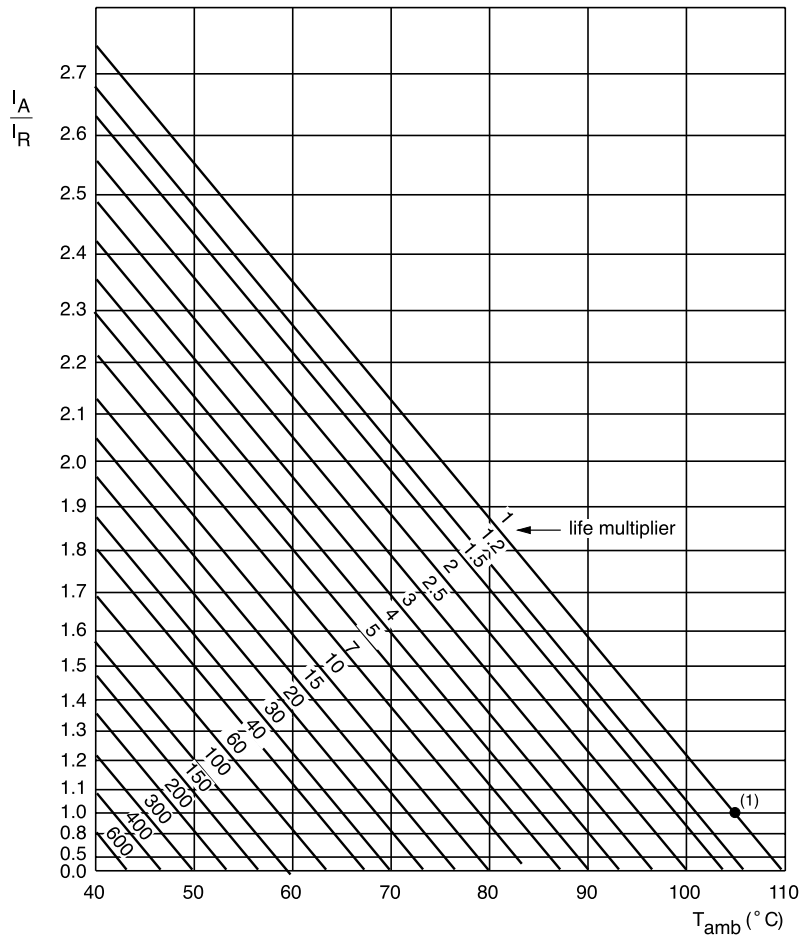

I<sub>A</sub> = actual ripple current at 100 Hz  
I<sub>R</sub> = rated ripple current at 100 Hz at 85 °C  
(1) Useful life at 85 °C and I<sub>R</sub> applied: 15 000 hours.

Fig.29 Multiplier of useful life as a function of ambient temperature and ripple current load.



Table 4

MULTIPLIER OF RIPPLE CURRENT ( $I_R$ ) AS A FUNCTION OF FREQUENCY	
FREQUENCY (Hz)	$I_R$ MULTIPLIER
50	0.83
100	1.00
200	1.10
400	1.15
1000	1.19
$\geq 2000$	1.20

Table 5

TEST PROCEDURES AND REQUIREMENT			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
NAME OF TEST	REFERENCE		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85\text{ }^\circ\text{C}$ ; $U_R$ applied; 5000 hours	$U_R \leq 100\text{ V}$ ; $\Delta C/C: \pm 15\%$ $U_R > 100\text{ V}$ ; $\Delta C/C: \pm 10\%$ $ESR \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85\text{ }^\circ\text{C}$ ; $U_R$ and $I_R$ applied; 15 000 hours	$U_R \leq 100\text{ V}$ ; $\Delta C/C: \pm 45\%$ $U_R > 100\text{ V}$ ; $\Delta C/C: \pm 30\%$ $ESR \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $U_R \leq 100\text{ V}: \leq 1\%$ ; $U_R > 100\text{ V}: \leq 3\%$
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85\text{ }^\circ\text{C}$ ; no voltage applied; 500 hours after test: $U_R$ to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C: \pm 10\%$ $ESR \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.