

## NTC Thermistors, Long Lead Sensors



QUICK REFERENCE DATA	
PARAMETER	VALUE
Resistance value at:	
0 °C	see Resistance Values Table
50 °C	see Resistance Values Table
B <sub>25/85</sub> - value	3977 K
ΔT ensured between 0 °C and 50 °C	± 0.5 °C
Temperature coefficient	see Resistance Values Table
Maximum dissipation	100 mW
Minimum dielectric withstanding voltage (RMS) between leads and coating	500 V
Operating temperature range	- 40 to + 125 °C
Climatic category	40/125/56
Mass	≈ 0.2 g

### FEATURES

- Accuracy of 0.5 °C between 0 °C and 50 °C
- Small diameter
- High stability over a long life
- Long and flexible leads for special mounting or assembly requirements
- Old part number was 2322 645 10/20....
- Components in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC

### APPLICATIONS

- Temperature sensing and control
- These thermistors have a negative temperature coefficient. The device consists of a chip with two insulated or non-insulated nickel leads.

### PACKAGING

The thermistors are packed in cardboard boxes; the smallest packing quantity is 1000 units.

### MARKING

The body is colored with ochre lacquer and not marked.


### MOUNTING

By soldering in any position.


ELECTRICAL DATA AND ORDERING INFORMATION			
R <sub>25</sub> - VALUE (kΩ)	B <sub>25/85</sub> - VALUE (K)	12NC ORDERING CODE 2381 645....	SAP MATERIAL NO. NTCLE201E3...
3	3977	10302	302SB0
5	3977	10502	502SB0
10	3977	10103	103SB0
R <sub>25</sub> - VALUE (kΩ)	B <sub>25/85</sub> - VALUE (K)	12NC ORDERING CODE 2381 645....	SAP MATERIAL NO. NTCLE300E3...
3	3977	20302	302SB
5	3977	20502	502SB
10	3977	20103	103SB

### DIMENSIONS in millimeters

Component outline for 2381 645 10/NTCLE201E3... series

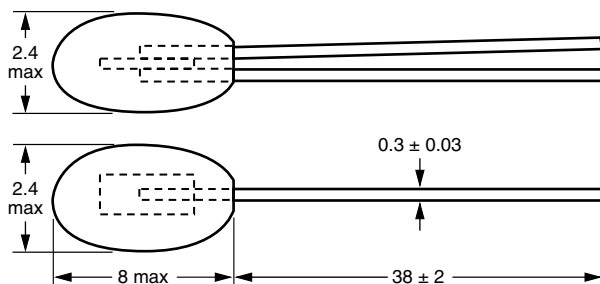


Component outline for 2381 645 20/NTCLE300E3... series

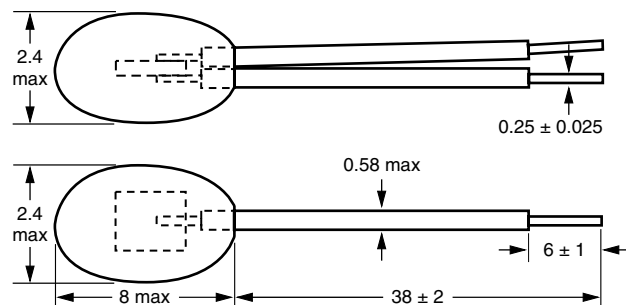



**DERATING**

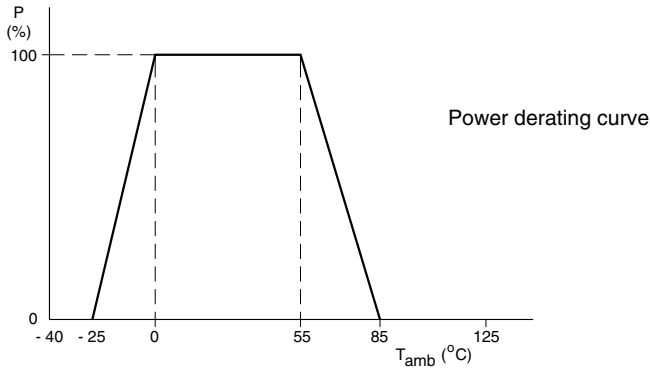

RESISTANCE VALUES AT INTERMEDIATE TEMPERATURES						
T <sub>OPER</sub> (°C)	R <sub>T</sub> /R <sub>25</sub>	ΔT (K)	TCR (%/K)	R <sub>25</sub> -VALUE (kΩ)		
				2381 645 10... (NTCLE201E3...SB0) OR 2381 645 20... (NTCLE300E3...SB)		
				302	502	103
- 40	33.21	0.68	6.57	99.63	166.1	332.1
- 35	23.99	0.66	6.36	71.97	120.0	239.9
- 30	17.52	0.64	6.15	52.56	87.60	175.2
- 25	12.93	0.62	5.95	38.79	64.65	129.3
- 20	9.636	0.59	5.76	28.91	48.18	96.36
- 15	7.250	0.57	5.58	21.75	36.25	72.50
- 10	5.505	0.55	5.40	16.51	27.52	55.05
- 5	4.216	0.52	5.24	12.65	21.08	42.16
0	3.255	0.50	5.08	9.766	16.28	32.56
5	2.534	0.50	4.92	7.602	12.67	25.34
10	1.987	0.50	4.78	5.962	9.936	19.87
15	1.570	0.50	4.64	4.710	7.849	15.70
20	1.249	0.50	4.50	3.746	6.244	12.49
25	1.000	0.50	4.37	3.000	5.000	10.00
30	0.8059	0.50	4.25	2.418	4.030	8.059
35	0.6535	0.50	4.13	1.960	3.267	6.535
40	0.5330	0.50	4.02	1.599	2.665	5.330
45	0.4372	0.50	3.91	1.312	2.186	4.372
50	0.3605	0.50	3.80	1.082	1.803	3.606
55	0.2989	0.55	3.70	0.8966	1.494	2.989
60	0.2490	0.61	3.60	0.7470	1.245	2.490
65	0.2084	0.66	3.51	0.6253	1.042	2.084
70	0.1753	0.72	3.42	0.5259	0.8765	1.753
75	0.1481	0.77	3.33	0.4443	0.7405	1.481
80	0.1256	0.83	3.25	0.3769	0.6282	1.256
85	0.1070	0.89	3.16	0.3211	0.5352	1.070
90	0.09154	0.95	3.09	0.2746	0.4577	0.9154
95	0.07860	1.02	3.01	0.2358	0.3930	0.7860
100	0.06773	1.08	2.94	0.2032	0.3387	0.6773
105	0.05858	1.14	2.87	0.1757	0.2929	0.5858
110	0.05083	1.21	2.80	0.1525	0.2542	0.5083
115	0.04426	1.27	2.73	0.1328	0.2213	0.4426
120	0.03866	1.34	2.67	0.1160	0.1933	0.3866
125	0.03387	1.41	2.61	0.1016	0.1694	0.3387



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.