

### Standard Recovery Diodes (Stud Version), 25 A



DO-203AA (DO-4)

#### FEATURES

- High surge current capability
- Stud cathode and stud anode version
- Wide current range
- Types up to 1200 V  $V_{RRM}$
- RoHS compliant



**RoHS**  
COMPLIANT

#### TYPICAL APPLICATIONS

- Battery charges
- Converters
- Power supplies
- Machine tool controls

#### PRODUCT SUMMARY

|             |      |
|-------------|------|
| $I_{F(AV)}$ | 25 A |
|-------------|------|

#### MAJOR RATINGS AND CHARACTERISTICS

| PARAMETER    | TEST CONDITIONS | VALUES      | UNITS            |
|--------------|-----------------|-------------|------------------|
| $I_{F(AV)}$  |                 | 25          | A                |
|              | $T_C$           | 120         | °C               |
| $I_{F(RMS)}$ |                 | 40          | A                |
| $I_{FSM}$    | 50 Hz           | 356         | A                |
|              | 60 Hz           | 373         |                  |
| $I^2t$       | 50 Hz           | 636         | A <sup>2</sup> s |
|              | 60 Hz           | 580         |                  |
| $V_{RRM}$    | Range           | 100 to 1200 | V                |
| $T_J$        |                 | - 65 to 175 | °C               |

#### ELECTRICAL SPECIFICATIONS

##### VOLTAGE RATINGS

| TYPE NUMBER | VOLTAGE CODE | $V_{RRM}$ , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE<br>V | $V_{RSM}$ , MAXIMUM NON-REPETITIVE PEAK VOLTAGE<br>V | $V_{R(BR)}$ , MINIMUM AVALANCHE VOLTAGE<br>V <sup>(1)</sup> | $I_{RRM}$ MAXIMUM AT $T_J = 175$ °C<br>mA |
|-------------|--------------|----------------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------|
| 25F(R)      | 10           | 100                                                      | 150                                                  | -                                                           | 12                                        |
|             | 20           | 200                                                      | 275                                                  | -                                                           |                                           |
|             | 40           | 400                                                      | 500                                                  | 500                                                         |                                           |
|             | 60           | 600                                                      | 725                                                  | 750                                                         |                                           |
|             | 80           | 800                                                      | 950                                                  | 950                                                         |                                           |
|             | 100          | 1000                                                     | 1200                                                 | 1150                                                        |                                           |
|             | 120          | 1200                                                     | 1400                                                 | 1350                                                        |                                           |

#### Note

<sup>(1)</sup> Avalanche version only available from  $V_{RRM}$  400 V to 1200 V

| FORWARD CONDUCTION                                            |                               |                                                                                                          |                                  |                                                                       |        |                   |                  |
|---------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------|--------|-------------------|------------------|
| PARAMETER                                                     | SYMBOL                        | TEST CONDITIONS                                                                                          |                                  |                                                                       | VALUES | UNITS             |                  |
| Maximum average forward current at case temperature           | I <sub>F(AV)</sub>            | 180° conduction, half sine wave                                                                          |                                  |                                                                       | 25     | A                 |                  |
|                                                               |                               |                                                                                                          |                                  |                                                                       | 120    | °C                |                  |
| Maximum RMS forward current                                   | I <sub>F(RMS)</sub>           |                                                                                                          |                                  |                                                                       | 40     | A                 |                  |
| Maximum on-repetitive peak reverse power                      | P <sub>R</sub> <sup>(1)</sup> | 10 μs square pulse, T <sub>J</sub> = T <sub>J</sub> maximum                                              |                                  |                                                                       | 10     | K/W               |                  |
| Maximum peak, one-cycle forward, non-repetitive surge current | I <sub>FSM</sub>              | t = 10 ms                                                                                                | No voltage reapplied             | Sinusoidal half wave, initial T <sub>J</sub> = T <sub>J</sub> maximum | 356    | A                 |                  |
|                                                               |                               | t = 8.3 ms                                                                                               |                                  |                                                                       | 373    |                   |                  |
|                                                               |                               | t = 10 ms                                                                                                | 100 % V <sub>RRM</sub> reapplied |                                                                       | 300    |                   | A <sup>2</sup> s |
|                                                               |                               | t = 8.3 ms                                                                                               |                                  |                                                                       | 314    |                   |                  |
| Maximum I <sup>2</sup> t for fusing                           | I <sup>2</sup> t              | t = 10 ms                                                                                                | No voltage reapplied             |                                                                       | 636    |                   |                  |
|                                                               |                               | t = 8.3 ms                                                                                               |                                  |                                                                       | 580    |                   |                  |
|                                                               |                               | t = 10 ms                                                                                                | 100 % V <sub>RRM</sub> reapplied |                                                                       | 450    |                   |                  |
|                                                               |                               | t = 8.3 ms                                                                                               |                                  |                                                                       | 410    |                   |                  |
| Maximum I <sup>2</sup> √t for fusing                          | I <sup>2</sup> √t             | t = 0.1 to 10 ms, no voltage reapplied                                                                   |                                  |                                                                       | 6360   | A <sup>2</sup> √s |                  |
| Low level value of threshold voltage                          | V <sub>F(TO)1</sub>           | (16.7 % × π × I <sub>F(AV)</sub> < I < π × I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum |                                  |                                                                       | 0.80   | V                 |                  |
| High level value of threshold voltage                         | V <sub>F(TO)2</sub>           | (I > π × I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum                                   |                                  |                                                                       | 0.90   |                   |                  |
| Low level value of forward slope resistance                   | r <sub>f1</sub>               | (16.7 % × π × I <sub>F(AV)</sub> < I < π × I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum |                                  |                                                                       | 6.80   | mΩ                |                  |
| High level value of forward slope resistance                  | r <sub>f2</sub>               | (I > π × I <sub>F(AV)</sub> ), T <sub>J</sub> = T <sub>J</sub> maximum                                   |                                  |                                                                       | 5.70   |                   |                  |
| Maximum forward voltage drop                                  | V <sub>FM</sub>               | I <sub>pk</sub> = 78 A, T <sub>J</sub> = 25 °C, t <sub>p</sub> = 400 μs rectangular wave                 |                                  |                                                                       | 1.30   | V                 |                  |

### Note

(1) Available only for avalanche version, all other parameters the same as 25F




| THERMAL AND MECHANICAL SPECIFICATIONS        |                   |                                               |                        |                     |
|----------------------------------------------|-------------------|-----------------------------------------------|------------------------|---------------------|
| PARAMETER                                    | SYMBOL            | TEST CONDITIONS                               | VALUES                 | UNITS               |
| Maximum junction operating temperature range | T <sub>J</sub>    |                                               | - 65 to 175            | °C                  |
| Maximum storage temperature range            | T <sub>Stg</sub>  |                                               | - 65 to 200            |                     |
| Maximum thermal resistance, junction to case | R <sub>thJC</sub> | DC operation                                  | 1.5                    | K/W                 |
| Maximum thermal resistance, case to heatsink | R <sub>thCS</sub> | Mounting surface, smooth, flat and greased    | 0.5                    |                     |
| Allowable mounting torque                    |                   | Not lubricated threads                        | 1.5 + 0 - 10 %<br>(13) | N · m<br>(lbf · in) |
|                                              |                   | Lubricated threads                            | 1.2 + 0 - 10 %<br>(10) | N · m<br>(lbf · in) |
| Approximate weight                           |                   |                                               | 7                      | g                   |
|                                              |                   |                                               | 0.25                   | oz.                 |
| Case style                                   |                   | See dimensions - link at the end of datasheet | DO-203AA (DO-4)        |                     |



| $\Delta R_{thJC}$ CONDUCTION |                       |                        |                               |       |
|------------------------------|-----------------------|------------------------|-------------------------------|-------|
| CONDUCTION ANGLE             | SINUSOIDAL CONDUCTION | RECTANGULAR CONDUCTION | TEST CONDITIONS               | UNITS |
| 180°                         | 0.28                  | 0.24                   | $T_J = T_{J \text{ maximum}}$ | K/W   |
| 120°                         | 0.39                  | 0.41                   |                               |       |
| 90°                          | 0.50                  | 0.54                   |                               |       |
| 60°                          | 0.73                  | 0.75                   |                               |       |
| 30°                          | 1.20                  | 1.21                   |                               |       |

### Note

- The table above shows the increment of thermal resistance  $R_{thJC}$  when devices operate at different conduction angles than DC

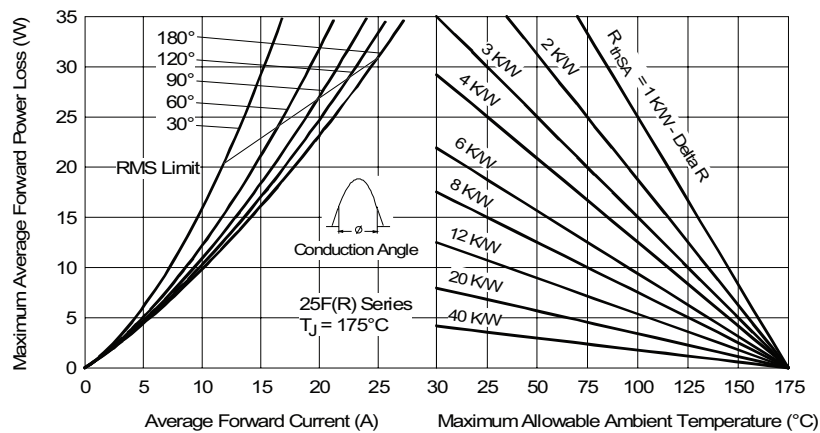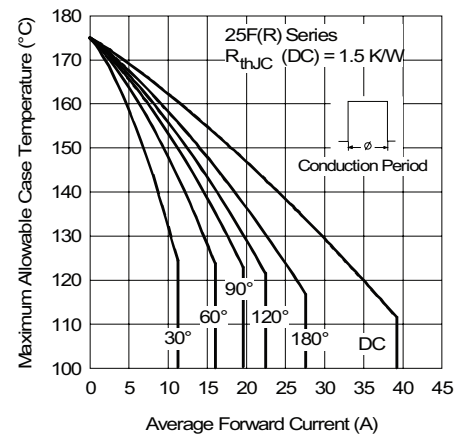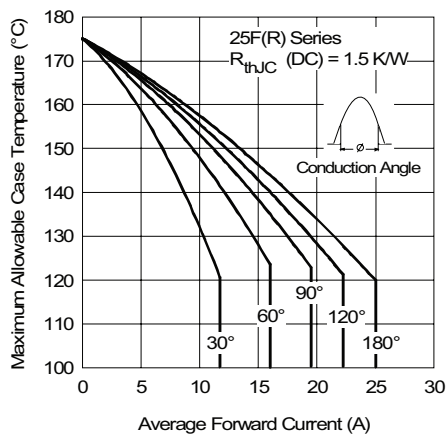

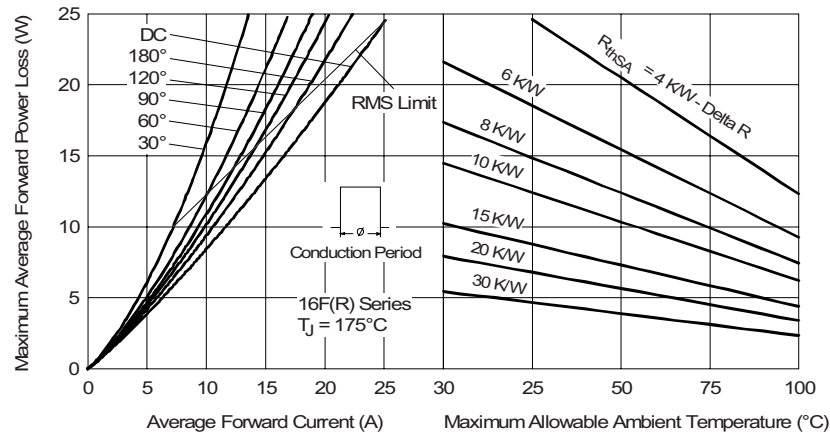


Fig. 4 - Forward Power Loss Characteristics

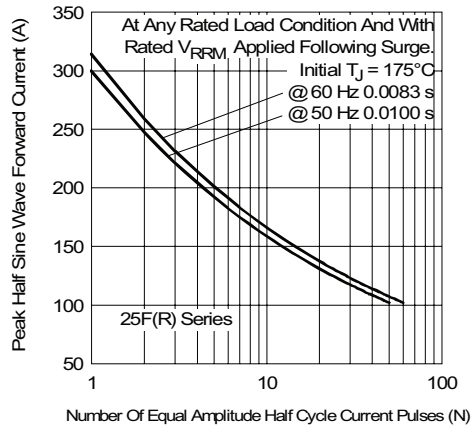


Fig. 5 - Maximum Non-Repetitive Surge Current

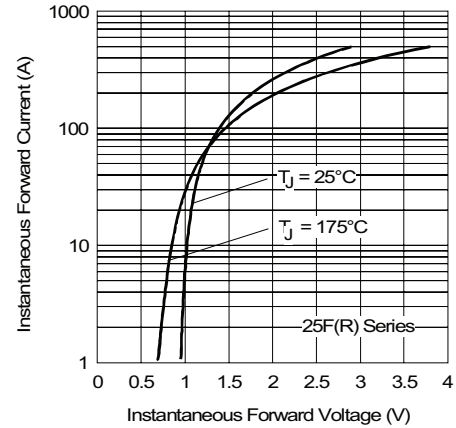


Fig. 7 - Forward Voltage Drop Characteristics

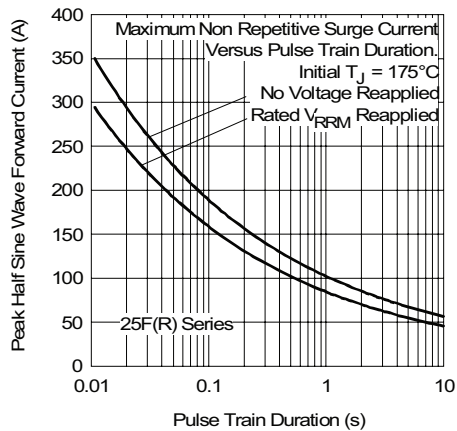


Fig. 6 - Maximum Non-Repetitive Surge Current

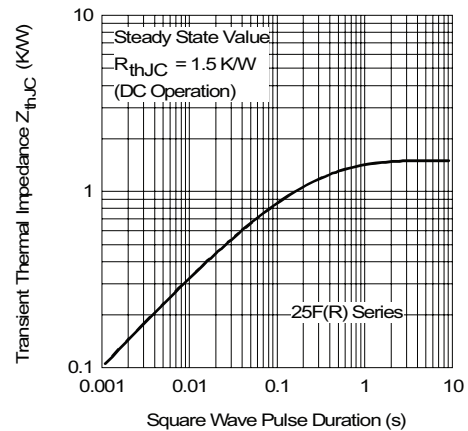


Fig. 8 - Thermal Impedance  $Z_{thJC}$  Characteristics



### ORDERING INFORMATION TABLE

|             |    |   |   |     |   |
|-------------|----|---|---|-----|---|
| Device code | 25 | F | R | 120 | M |
|             | 1  | 2 | 3 | 4   | 5 |

1

-

Current rating: Code =  $I_{F(AV)}$

2

-

F = Standard device

3

-

None = Stud normal polarity (cathode to stud)  
R = Stud reverse polarity (anode to stud)

4

-

Voltage code x 10 =  $V_{RRM}$  (see Voltage Ratings table)

5

-

None = Stud base DO-203AA (DO-4) 10-32UNF-2A  
M = Stud base DO-203AA (DO-4) M5 X 0.8  
(not available for avalanche diodes)

| LINKS TO RELATED DOCUMENTS |                                                                               |
|----------------------------|-------------------------------------------------------------------------------|
| Dimensions                 | <a href="http://www.vishay.com/doc?95311">http://www.vishay.com/doc?95311</a> |

**DIMENSIONS** in millimeters (inches)





## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.