




## Surface Mount Glass Passivated Junction Rectifiers

Reverse Voltage 50 to 600V  
Forward Current 0.5A

DO-213AA

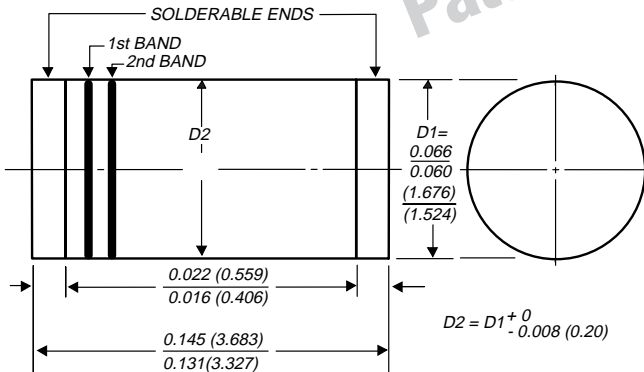

Patented\*



1st band denotes type and polarity  
2nd band denotes voltage type

Dimensions in inches  
and (millimeters)

\* Glass-plastic encapsulation is covered by  
Patent No. 3,996,602 and brazed-lead assembly to Patent No. 3,930,306

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mount applications
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- Capable of meeting environmental standards of MIL-S-19500
- Fast switching for high efficiency
- High temperature soldering guaranteed: 450°C/5 seconds at terminals. Complete device submersible temperature of 260°C for 10 seconds in solder bath

### Mechanical Data

**Case:** JEDEC DO-213AA, molded plastic over glass body  
**Terminals:** Plated terminals, solderable per MIL-STD-750, Method 2026  
**Polarity:** Two bands indicate cathode end – 1st band denotes device type and 2nd band denotes repetitive peak reverse voltage rating  
**Mounting Position:** Any  
**Weight:** 0.0014 oz., 0.036 g

### Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

| Standard recovery device: first band is white  | Symbol                            | GL34A       | GL34B | GL34D  | GL34G  | GL34J | Unit |
|--|-----------------------------------|-------------|-------|--------|--------|-------|------|
| Polarity color bands (2nd Band)  |                                   | Gray        | Red   | Orange | Yellow | Green |      |
| Maximum repetitive peak reverse voltage  | V <sub>RRM</sub>                  | 50          | 100   | 200    | 400    | 600   | V    |
| Maximum RMS voltage  | V <sub>RMS</sub>                  | 35          | 70    | 140    | 280    | 420   | V    |
| Maximum DC blocking voltage  | V <sub>DC</sub>                   | 50          | 100   | 200    | 400    | 600   | V    |
| Maximum average forward rectified current at T <sub>T</sub> = 75°C                               | I <sub>F(AV)</sub>                | 0.5         |       |        |        |       | A    |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>                  | 10          |       |        |        |       | A    |
| Max. full load reverse current, full cycle average T <sub>A</sub> = 55°C                         | I <sub>R(AV)</sub>                | 30          |       |        |        |       | μA   |
| Maximum thermal resistance (Note 1)  | R <sub>θJA</sub>                  | 150         |       |        |        |       | °C/W |
| (Note 2)   | R <sub>θJT</sub>                  | 70          |       |        |        |       |      |
| Operating junction and storage temperature range   | T <sub>J</sub> , T <sub>STG</sub> | -65 to +175 |       |        |        |       | °C   |

### Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

|   |                 |     |  |  |     |    |
|---|-----------------|-----|--|--|-----|----|
| Maximum instantaneous forward voltage at 0.5A   | V <sub>F</sub>  | 1.2 |  |  | 1.3 | V  |
| Maximum DC reverse current T <sub>A</sub> = 25°C<br>at rated DC blocking voltage T <sub>A</sub> = 125°C   | I <sub>R</sub>  | 5.0 |  |  | 50  | μA |
| Typical reverse recovery time at<br>I <sub>F</sub> = 0.5A, I <sub>R</sub> = 1.0A, I <sub>rr</sub> = 0.25A | t <sub>rr</sub> | 1.5 |  |  |     | μs |
| Typical junction capacitance at 4.0V, 1MHz  | C <sub>J</sub>  | 4.0 |  |  |     | pF |

**Notes:**

- (1) Thermal resistance from junction to ambient, 0.2 x 0.2" (5.0 x 5.0mm) copper pads to each terminal
- (2) Thermal resistance from junction to terminal, 0.2 x 0.2" (5.0 x 5.0mm) copper pads to each terminal


# GL34A thru GL34J

Vishay Semiconductors  
formerly General Semiconductor




## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Forward Current Derating Curve**

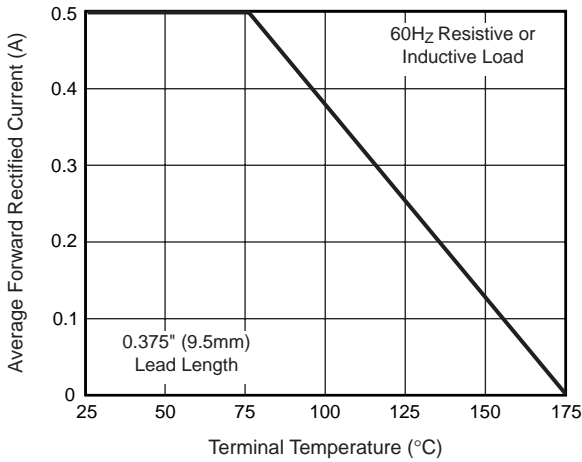


**Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current**

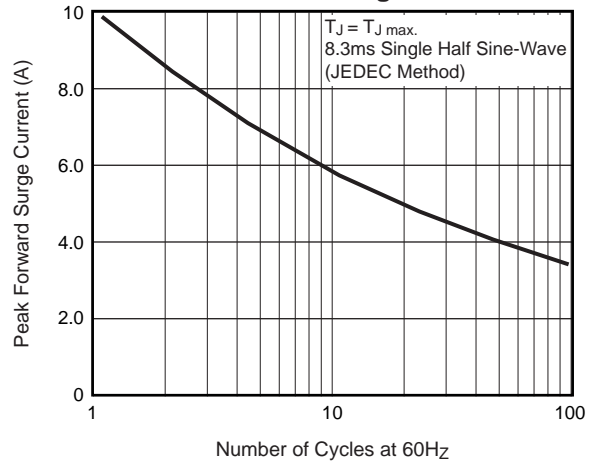

**Fig. 3 – Typical Instantaneous Forward Characteristics**

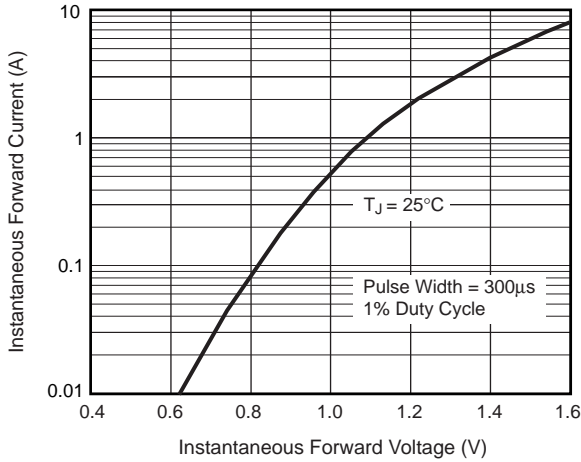

**Fig. 4 – Typical Reverse Characteristics**

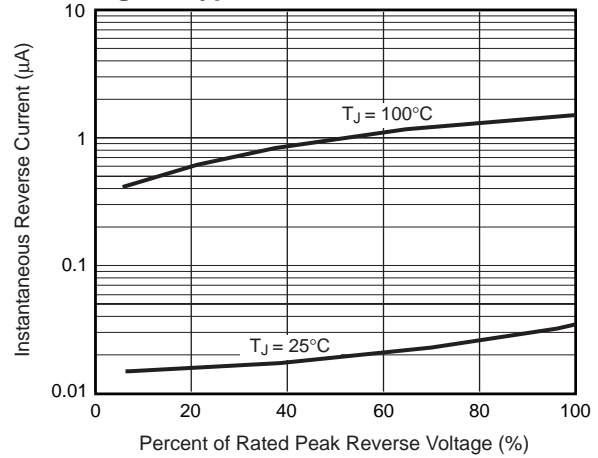

**Fig. 5 – Typical Junction Capacitance**

