

Conformal, Radial Discrete Resistor



FEATURES

- Incorporates high stability thin film element (0.1 % at + 70 °C at Pn during 1000 h)



RoHS
COMPLIANT

TYPICAL PERFORMANCE

		ABS
TCR		5 ppm/°C
		ABS
TOL.		0.01 %

SCHEMATIC




STANDARD ELECTRICAL SPECIFICATIONS			
TEST		SPECIFICATIONS	CONDITIONS
MATERIAL		PASSIVATED NICHROME	
Resistance range		100 Ω (minimum) to 10 MΩ (maximum)	
Absolute TCR:	Standard ⁽¹⁾	± 10 ppm/°C	- 40 °C to + 125 °C
	On request	± 5 ppm/°C	0 °C to + 70 °C
Tolerance:	Absolute	± 0.01 % to ± 1 %	
Power rating:		0.5 W	at + 70 °C
		0.3 W	at + 125 °C
Working voltage (maximum)		300 V	
Operating temperature range		- 55 °C to + 155 °C	

Note:

⁽¹⁾ 15 ppm/°C for $R \geq 1.5M$

DIMENSIONS AND IMPRINTING

CNS 020

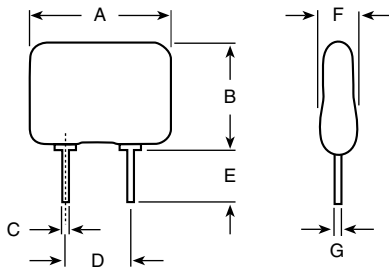

DIMENSION	INCHES	MILLIMETERS
A	0.318	8.10
B	0.260	6.62
C	0.020	0.51
D	0.200	5.08
E	0.120	3.17
F	0.100	2.54
G	0.010	0.25

In clear: Model, Vishay logo and manufacturing code

On back: Ohmic value (in Ω), tolerance (in %)



ENVIRONMENTAL TEST				
TEST	REQUIREMENTS			CONDITIONS
	NFC 83220 CECC40300	MIL-PRF 55182E	DRIFTS (max.)	
Overload	± 0.01 %	± 0.05 %	0.01 %	2.5 Un/5 s U _{max} < 2 Un
Temperature cycling	± 0.01 %	± 0.05 %	0.01 %	- 55 °C/+ 155 °C 5 cycles CEI 63-2-14 Test No
Terminal strength	± 0.01 %	± 0.02 %	0.01 %	CEI 68-2-21 Test Ua (pulling), Ub (bending), Uc (twisting)
Resistance to solder heat	± 0.01 %	± 0.02 %	0.01 %	+ 260 °C/10 s, CEI 68-2-20A Test T6 (Met 1A)
Vibration	± 0.01 %	± 0.02 %	0.01 %	10 Hz to 500 Hz 10 g, 6 h Met B4; CEI 68-2-6 Test Fc
Climatic sequence	± 0.05 % Insulation resistance > 10 ² MΩ	-	0.05 %	- 55 °C/+ 155 °C 6 cycles 95 % RH RH 85 mbar CEI68-1
Moisture	± 0.05 % Insulation resistance > 10 ² MΩ	-	0.02 %	56 days 95 % RH + 40 °C CEI 68-2-3
High temperature storage	± 0.05 %	-	0.05 %	1000 h/+ 155 °C CEI 68-2-20A; Test B

MECHANICAL SPECIFICATIONS	
Resistive material	Nichrome
Substrate material	Alumina
Terminals	Tin/silver on Cu alloy
Protection	Conformal epoxy coating

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: CNS020-301KF (preferred part number format)

C	N	S	0	2	0	-	3	0	1	K	F
---	---	---	---	---	---	---	---	---	---	---	---

GLOBAL MODEL CNS 020	VALUE Decimal: R, K or M	TOLERANCE L = ± 0.01 % C = ± 0.25 % P = ± 0.02 % D = ± 0.5 % W = ± 0.05 % F = ± 1.0 % B = ± 0.1 %
-------------------------	-----------------------------	--

Historical Part Number example: CNS 020 301K 1 % (will continue to be accepted)

CNS 020	301K	1 %
HISTORICAL MODEL	VALUE	TOLERANCE



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.