

Filter Inductors

High Current



FEATURES

- Totally encapsulated using a potted flame-resistant shell
- Pre-tinned leads
- Printed circuit mounting


RoHS
COMPLIANT

STANDARD ELECTRICAL SPECIFICATIONS

IND. at 1 kHz (μH)	TOL.	DCR MAX. (Ohms)	RATED CURRENT (Max. Amps)
1.0	± 10 %	0.005	17.80
1.2	± 10 %	0.005	17.00
1.5	± 10 %	0.006	16.20
1.8	± 10 %	0.006	15.60
2.2	± 10 %	0.007	15.00
2.7	± 10 %	0.008	14.50
3.3	± 10 %	0.008	14.00
3.9	± 10 %	0.009	13.50
4.7	± 10 %	0.010	13.00
5.6	± 10 %	0.011	12.75
6.8	± 10 %	0.012	12.50
8.2	± 10 %	0.013	11.25
10.0	± 10 %	0.014	10.00
12.0	± 10 %	0.016	9.25
15.0	± 10 %	0.022	8.50
18.0	± 10 %	0.024	7.50
22.0	± 10 %	0.033	6.50
27.0	± 10 %	0.037	6.00
33.0	± 10 %	0.051	5.50
39.0	± 10 %	0.056	5.00
47.0	± 10 %	0.076	4.50
56.0	± 10 %	0.084	4.25
68.0	± 10 %	0.093	4.00
82.0	± 10 %	0.103	3.65
100.0	± 10 %	0.140	3.30
120.0	± 10 %	0.175	3.00
150.0	± 10 %	0.210	2.70
180.0	± 10 %	0.241	2.45
220.0	± 10 %	0.330	2.20
270.0	± 10 %	0.420	1.95
330.0	± 10 %	0.510	1.70
390.0	± 10 %	0.561	1.65
470.0	± 10 %	0.610	1.60
560.0	± 10 %	0.687	1.45
680.0	± 10 %	0.910	1.30
820.0	± 10 %	1.030	1.15
1000.0	± 10 %	1.400	1.00
1200.0	± 10 %	1.570	0.92
1500.0	± 10 %	2.200	0.84
1800.0	± 10 %	2.420	0.77
2200.0	± 10 %	3.300	0.69
2700.0	± 10 %	3.720	0.62
3300.0	± 10 %	5.100	0.55
3900.0	± 10 %	5.580	0.50
4700.0	± 10 %	7.700	0.45
5600.0	± 10 %	8.320	0.41
6800.0	± 10 %	11.700	0.36
8200.0	± 10 %	12.800	0.35
10000.0	± 10 %	14.200	0.33
12000.0	± 10 %	15.700	0.30
15000.0	± 10 %	21.900	0.26

ELECTRICAL SPECIFICATIONS

Inductance: Measured at 1.0 V with no DC current

Current Rating: Maximum continuous operating current based on 50 °C temperature rise

Dielectric Rating: 1500 VRMS between windings and top of component

Operating Temperature: - 55 °C to + 125 °C (no load)
- 55 °C to + 75 °C (at full rated current)


MECHANICAL SPECIFICATIONS

Terminals: 18 AWG tinned copper

Encapsulant: Flame-resistant shell potted with epoxy

Core Material: Ferrite

DIMENSIONS in inches [millimeters]

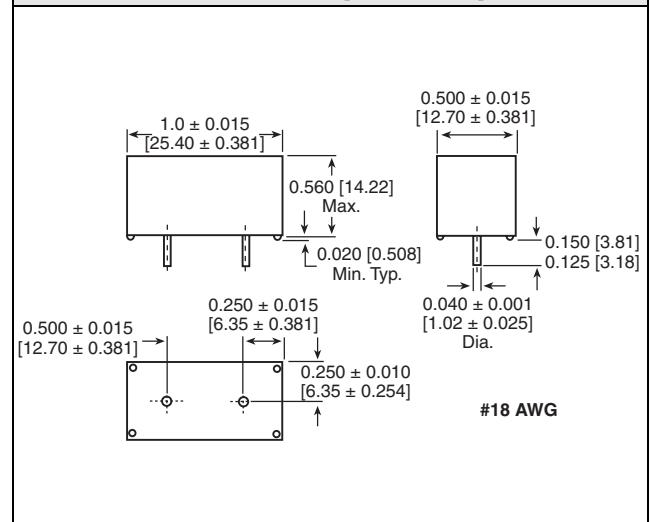

MARKING

- Vishay Dale
- Model
- Value
- Date code

ORDERING INFORMATION

IHM-2	10 μH	± 10 %	EB	e3
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER INFORMATION

I	H	M	2	E	B	1	0	0	K
MODEL				PACKING CODE		INDUCTANCE VALUE			TOL.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.