


## Heatsink Encased Wirewound Power Resistors



### FEATURES

- 5 W to 50 W at 25 °C
- NF C 83-210
- CECC 40 203
- High stability < 0.05 % year
- Low temperature coefficient typically  $\pm 15$  ppm/°C
- Wide range of values from 0.006  $\Omega$  to 130 k $\Omega$
- Termination = Sn/Ag/Cu
- Compliant to RoHS directive 2002/95/EC

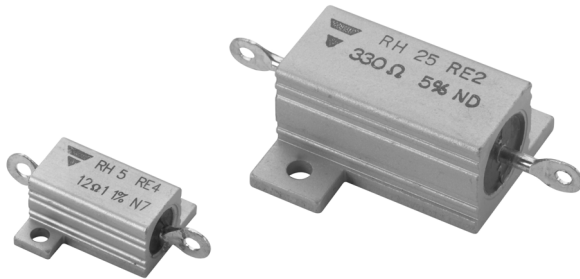

**RoHS**  
COMPLIANT

Encased in a compact and light heatsink offering complete environmental protection, great mechanical strength and easy mounting. Non inductive versions can be supplied under the RHNI designation (please indicate required specifications and frequency range upon ordering).

NF F 16101, 10/1988 and 16102, 04/1992: Not applicable (our parts contain less than 10 g of combustible materials).

DIMENSIONS in millimeters																
SERIES	A	B $\pm$ 0.2	D $\pm$ 0.2	E $\pm$ 0.5	F	G $\pm$ 1	H $\pm$ 0.7	J $\pm$ 0.5	$\varnothing$ K $\pm$ 0.1	L MAX.	M $\pm$ 0.5	N $\pm$ 0.3	$\varnothing$ P MIN.	Q	WEIGHT g	
RH5	28.5 $\pm$ 1.5	12.5	11.3	16.3	6.8 $\pm$ 1.5	8.5	6.2	16.4	2.4	8.9	4.3	1.6	2.1	25.3 $\pm$ 1.5	4	
RH10	35.5 $\pm$ 1.5	15.9	14	19	7.9 $\pm$ 1.5	11	7.9	20.6	2.4	11	5.6	2	2.1	30.6 $\pm$ 1.5	6.4	
RH25	49 $\pm$ 1.3	19.8	18.3	28	11.1 $\pm$ 1.5	14	9.9	27.5	3.2	15	8	2.4	2.1	44.6 $\pm$ 1.3	16.1	
RH50	70.2 $\pm$ 1.4	21.4	39.7	50	11 $\pm$ 1.2	15.5	10.7	29.4	3.2	15	8	2.4	2.1	66.5 $\pm$ 1.4	28.6	

ELECTRICAL SPECIFICATIONS						
VISHAY SFERNICE MODEL AND STYLE			RH5 €	RH10 €	RH25 €	RH50 €
NF C 83-210 (CECC 40 203)			RE4	RE1	RE2	RE3
POWER RATING Chassis Mounted Resistors	MIL Limits	25 °C	5 W	10 W	20 W	30 W
		70 °C	4 W	8 W	16 W	24 W
413 cm <sup>2</sup> for RH5 and RH10 536 cm <sup>2</sup> for RH25 and RH50	Vishay Sfernice Limits	25 °C	10 W	12.5 W	25 W	50 W
		70 °C	8 W	10 W	20 W	40 W
Unmounted Resistors	Vishay Sfernice Limits	25 °C	4 W	6 W	9W	12 W
		70 °C	3.2 W	4.8 W	7.2 W	9.6 W
Rated Maximum Voltage (V <sub>RMS</sub> )			160 V	250 V	550 V	1285 V



ELECTRICAL SPECIFICATIONS					
VISHAY SFERNICE MODEL AND STYLE		RH5	RH10	RH25	RH50
Dielectric Strength $V_{RMS}$		1000 V	1500 V	2500 V	2500 V
Vishay Sfernice		0.01 $\Omega$ 12 k $\Omega$	0.006 $\Omega$ 20 k $\Omega$	0.006 $\Omega$ 62 k $\Omega$	0.006 $\Omega$ 130 k $\Omega$
NF C 83-210		0.1 $\Omega$ 2.7 k $\Omega$	0.1 $\Omega$ 4.99 k $\Omega$	0.1 $\Omega$ 11.8 k $\Omega$	0.1 $\Omega$ 33.2 k $\Omega$
Minimum Ohmic Values in Relation to Tolerance	E 96	$\pm 0.1\%$	1 $\Omega$	1 $\Omega$	
	E 96	$\pm 0.5\%$	0.1 $\Omega$	0.1 $\Omega$	
	E 96	$\pm 1\%$	0.1 $\Omega$	0.05 $\Omega$	
	E 48	$\pm 2\%$	0.01 $\Omega$	0.01 $\Omega$	
	E 24	$\pm 5\%$	0.01 $\Omega$	0.01 $\Omega$	
	E 12	$\pm 10\%$	0.01 $\Omega$	0.008 $\Omega$	0.006 $\Omega$

**Note**

- Undergoes European Quality Insurance System (CECC)

PERFORMANCE			
TESTS	MIL-R-18546 D	NF C 83-210	TYPICAL DRIFTS
	CONDITIONS		
Operating Temperature Range	- 55 °C + 200 °C		-
Momentary Overload	5 $P_n$ /5 s		$\pm (0.25\% + 0.05 \Omega)$
Climatic Sequence	- 55 °C + 200 °C 5 cycles		$\pm (0.25\% + 0.05 \Omega)$
Load Life Test at High Temperature	2 h at + 275 °C		$\pm (1\% + 0.05 \Omega)$ Ins. resistance $\geq 1 \text{ G}\Omega$
Humidity (Steady State)	56 days		$\pm (1\% + 0.05)$ Ins. resistance $\geq 100 \text{ M}\Omega$
Resistance to Moisture	Climatic sequences test, with load and polarisation		$\pm (1\% + 0.05 \Omega)$
Temperature Coefficient	5 to 10 > 10		$\pm 50 \text{ ppm}/^\circ\text{C}$ $\pm 25 \text{ ppm}/^\circ\text{C}$
Load Life at Maximum Temperature	1000 h 25 °C	$P_n$ MIL Vishay	$\pm (1\% + 0.05 \Omega)$
	200 °C	30 % of $P_n$ Sfernice	Ins. resistance $\geq 1 \text{ G}\Omega$

**MOMENTARY OVERLOAD**

**1. Momentary overload (> 2 s):**

See example in table below. In all cases, it should be understood that:


- The 12  $P_n$  overload applies only to ohmic values 0.1.
- The overload voltage shall not be higher than that used for the dielectric strength test (see Standard Electrical Specifications).

**2. Short time overload (< 2 s):**


For times shorter than 2 s, higher overloads can be sustained in some cases. Consult Vishay Sfernice.

POWER LOADING	DURATION
2.5 $P_n$	10 s
5 $P_n$	5 s
12 $P_n$	2 s

**POWER RATING**

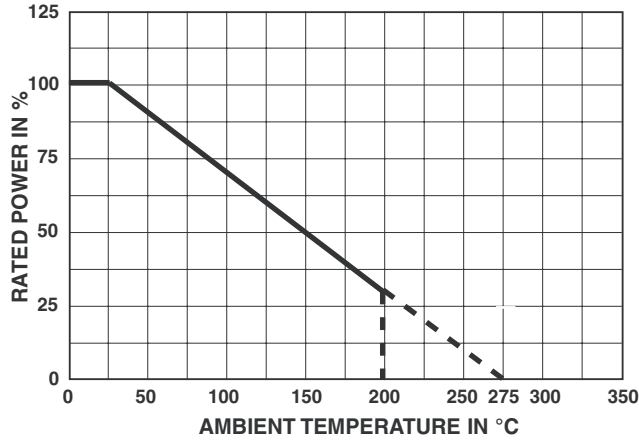

**TEMPERATURE RISE**

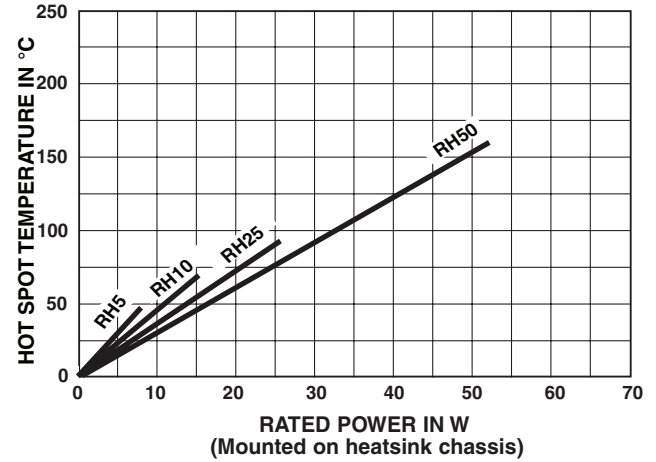

**MARKING**

Vishay Sfernice trademark, model, style, CECC style (if applicable) nominal resistance (in  $\Omega$ ), tolerance (in %), manufacturing date.


**PACKAGING**

Bag of 10 units

**ORDERING INFORMATION**

<b>RH</b>	<b>05</b>	<b>N</b>	<b>18R00</b>	<b>J</b>	<b>S03</b>
MODEL	STYLE	NON INDUCTIVE WINDING Optional	OHMIC VALUE	TOLERANCE	PACKAGING

**GLOBAL PART NUMBER INFORMATION**

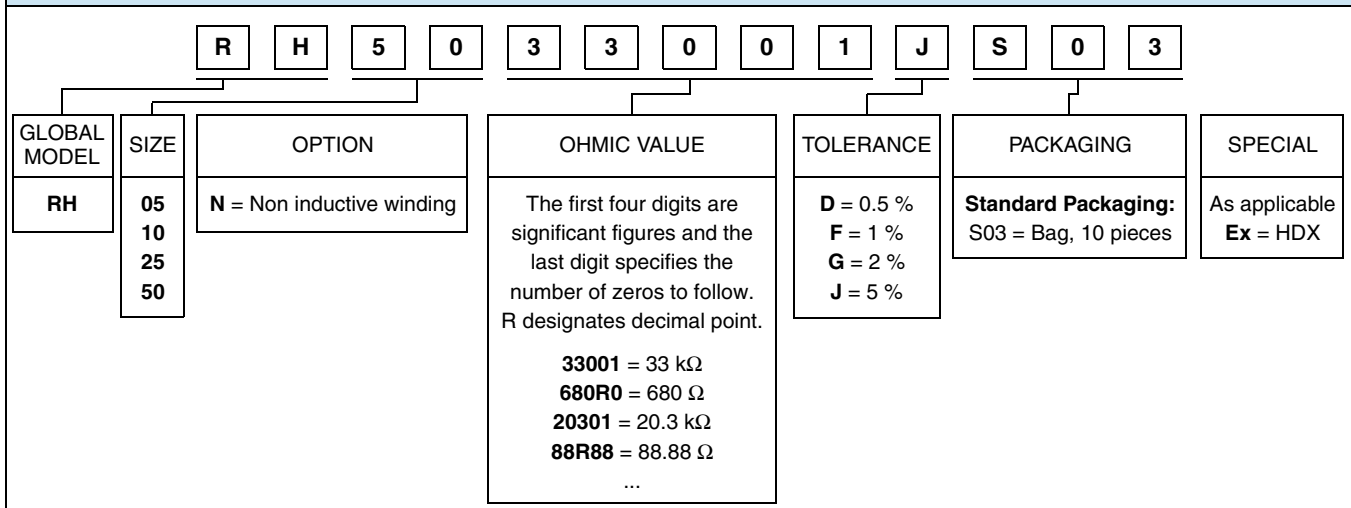



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.