


1/4" Multi-Turn Sealed Container Cermet Trimmers



FEATURES

- 0.25 Watt at 85 °C
- Industrial Grade
- Tests according to CECC 41 000
- MIL-R-22097
- Multi-turn operation
- A low contact resistance variation
- Tight tolerance
- Low end contact resistance

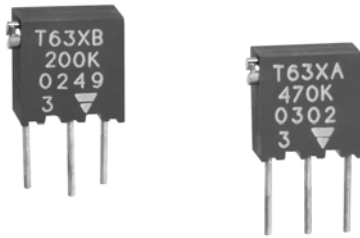





Due to their square shape and small size (6.8 x 6.8 x 5 mm), the multi-turn trimmers of the T63 series are ideally suited for PCB use, enabling high density board mounting with reduced space requirement between cards.

Four versions are available differing by the top or side position of the adjustment screw and by PC pins configuration.





The use of cermet for the resistive track ensures an excellent stability of nominal specifications throughout life.

DIMENSIONS in millimeters





T63XA







T63XB






T63YA






T63YB




T63ZA



T63ZB



CIRCUIT DIAGRAM



Tolerance unless otherwise specified ± 0.5

ELECTRICAL SPECIFICATIONS


Resistive Element	cermet
Electrical Travel	13 turns $\pm$ 2
Resistance Range	10 Ω to 2.2 M Ω
Standard Series and on Request Series E3	1 - 2 - 5 (1 - 2.2 - 4.7)
Tolerance	Standard $\pm$ 10 % On Request $\pm$ 5 %
Power Rating	Linear 0.25 W at + 85 °C
Temperature Coefficient	See Standard Resistance Element Table
Limiting Element Voltage (Linear Law)	250 V
Contact Resistance Variation	2 % R _n or 2 Ω
End Resistance (Typical)	1 Ω
Dielectric Strength (RMS)	1000 V
Insulation Resistance (500VDC)	10 ⁶ M Ω

MECHANICAL SPECIFICATIONS

Mechanical Travel	15 turns $\pm$ 5
Operating Torque (max. Ncm)	1.5
End Stop Torque	clutch action
Unit Weight (max. g)	0.5
Wiper (actual travel)	positioned at approx. 50 %

ENVIRONMENTAL SPECIFICATIONS

Temperature Range	- 55 °C + 155 °C
Climatic Category	55/125/56
Sealing	fully sealed container IP67

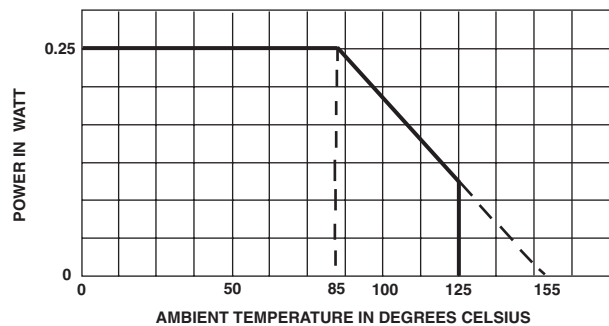POWER RATING CHART**PERFORMANCE**

TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS	
		$\frac{\Delta R T}{R T}$ (%)	$\frac{\Delta R_{1-2}}{R_{1-2}}$ (%)
Load Life	1000 hours at rated power 90°/30° - ambient temp. 85 °C	$\pm$ 1 % Contact res. variation: < 1 % R _n	$\pm$ 2 %
Climatic Sequence	Phase A dry heat 125 °C - 30 % Pr Phase B damp heat Phase C cold - 55 °C Phase D damp heat 5 cycles	$\pm$ 0.5 %	$\pm$ 1 %
Long Term Damp Heat	56 days 40 °C 93 % RH	$\pm$ 0.5 % Dielectric strength : 1000V RMS Insulation resistance : > 10 ⁴ M Ω	$\pm$ 1 %
Rapid Temperature Change	5 cycles - 55 °C to + 125 °C	$\pm$ 0.5 %	$\frac{\Delta V_{1-2}}{\Delta V_{1-3}} \leq \pm$ 1 %
Shock	50 g at 11m secs 3 successive shocks in 3 directions	$\pm$ 0.1 %	$\pm$ 0.2 %
Vibration	10-55 Hz 0.75 mm or 10 g during 6 hours	$\pm$ 0.1 %	$\frac{\Delta V_{1-2}}{\Delta V_{1-3}} \leq \pm$ 0.2 %
Rotational Life	200 cycles	$\pm$ 2 % Contact res. variation: < 1 % R _n	

**STANDARD RESISTANCE ELEMENT DATA**

STANDARD RESISTANCE VALUES	LINEAR LAW			T.C. – 55 °C + 125 °C
	MAX. POWER AT 85 °C	MAX. WORKING VOLTAGE	MAX. WIPER CUR.	
Ω	W	V	mA	ppm/°C
10	0.25	1.58	158	0 +200
20		2.23	112	
50		3.53	77	
100		5	50	± 100
200		7.07	35	
500		11.2	22	
1k		15.8	15.8	
2k		22.3	11.2	
5k		35.3	7.1	
10k		50	5	
20k		70.7	3.5	
25k		79	3.2	
50k		112	2.2	
100k		158	1.6	
200k		224	1.1	
250k		250	1.1	
500k		250	0.50	
1M		250	0.25	
2.2M		250	0.125	

MARKING

Printed:

- VISHAY trademark
- model
- style
- ohmic value (in Ω , k Ω , M Ω)
- tolerance (in %)
- only if non standard,
- manufacturing date
- marking of terminal 3

PACKAGING

- In magazine pack (tube) by 50 pieces code "TU50".

ORDERING INFORMATION

T63 MODEL	XA VERSION	100 k Ω OHMIC VALUE	± 10 % TOLERANCE	TU50 PACKAGING	e3 LEAD FINISH
				TU50 : Tube	e: pure Sn

SAP PART NUMBERING GUIDELINES

T	6	3	X	A	1	0	4	K	T	2	0			
MODEL			STYLE		OHMIC VALUE			TOL	PACKAGING CODE			SPECIAL (IF APPLICABLE)		

See the end of this data book for conversion tables



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.