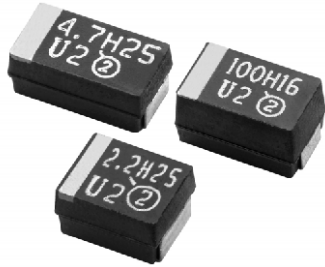


## Solid Tantalum Surface Mount Capacitors Tantamount® Molded Case, High Temperature


**FEATURES**

- Operating temperature up to 150 °C with 50 % voltage derating
- High reliability
- RoHS compliant terminations available: Matte tin (all cases) or gold (D/E cases)
- Standard EIA 535BAAC case sizes (A through E)
- 100 % surge current tested (B, C, D, E case sizes)
- AEC-Q200 qualified
- Compliant to RoHS directive 2002/95/EC
- Find out more about Vishay's Automotive Grade Product requirements at: [www.vishay.com/applications](http://www.vishay.com/applications)


**RoHS\***  
COMPLIANT

**PERFORMANCE/ELECTRICAL CHARACTERISTICS**
**Operating Temperature:** - 55 °C to + 150 °C

**Note:** Refer to doc. 40088

**Capacitance Range:** 0.33 µF to 220 µF


**Capacitance Tolerance:** ± 10 %, ± 20 %

**Voltage Rating:** 6.3 V<sub>DC</sub> to 50 V<sub>DC</sub>
**ORDERING INFORMATION**

TH3 TYPE	D CASE CODE	106 CAPACITANCE	K CAPACITANCE TOLERANCE	035 DC VOLTAGE RATING AT + 85 °C	C TERMINATION AND PACKAGING	0700 ESR
	See Ratings and Case Codes table	This is expressed in picofarads. The first two digits are the significant figures. The third is the number of zeros to follow	K = ± 10 % M = ± 20 %	This is expressed in V. To complete the three-digit block, zeros precede the voltage rating. A decimal point is indicated by an "R" (6R3 = 6.3 V)	A: Gold/7" (178 mm) reels <sup>(1)</sup> B: Gold/13" (330 mm) reels <sup>(1)</sup> C: Matte tin/7" (178 mm) reels D: Matte tin/13" (330 mm) reels E: Tin/lead/7" (178 mm) reels F: Tin/lead/13" (330 mm) reels	Maximum 100 kHz ESR 0500 = 500 mΩ 5000 = 5.0 Ω 10R0 = 10.0 Ω

**Notes**
<sup>(1)</sup> Contact factory for availability

- We reserve the right to supply higher voltage ratings and tighter capacitance tolerance capacitors in the same case size. Voltage substitutions will be marked with the higher voltage rating.

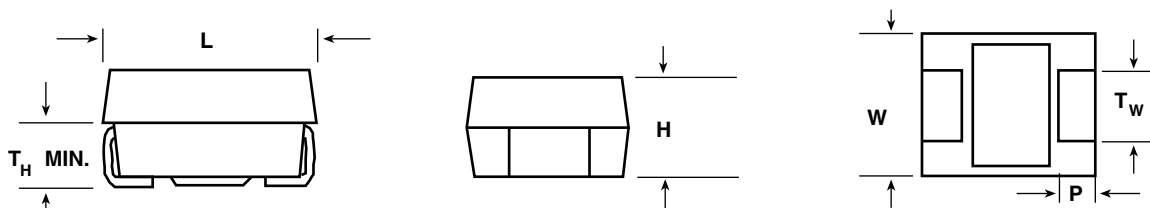**DIMENSIONS** in inches [millimeters]


CASE CODE	EIA SIZE	L	W	H	P	Tw	Th MIN.
A	3216-18	0.126 ± 0.008 [3.2 ± 0.20]	0.063 ± 0.008 [1.6 ± 0.20]	0.063 ± 0.008 [1.6 ± 0.20]	0.031 ± 0.012 [0.80 ± 0.30]	0.047 ± 0.004 [1.2 ± 0.10]	0.028 [0.70]
B	3528-21	0.138 ± 0.008 [3.5 ± 0.20]	0.110 ± 0.008 [2.8 ± 0.20]	0.075 ± 0.008 [1.9 ± 0.20]	0.031 ± 0.012 [0.80 ± 0.30]	0.087 ± 0.004 [2.2 ± 0.10]	0.028 [0.70]
C	6032-28	0.236 ± 0.012 [6.0 ± 0.30]	0.126 ± 0.012 [3.2 ± 0.30]	0.098 ± 0.012 [2.5 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.087 ± 0.004 [2.2 ± 0.10]	0.039 [1.0]
D	7343-31	0.287 ± 0.012 [7.3 ± 0.30]	0.170 ± 0.012 [4.3 ± 0.30]	0.110 ± 0.012 [2.8 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.095 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]
E	7343-43	0.287 ± 0.012 [7.3 ± 0.30]	0.170 ± 0.012 [4.3 ± 0.30]	0.158 ± 0.012 [4.0 ± 0.30]	0.051 ± 0.012 [1.3 ± 0.30]	0.095 ± 0.004 [2.4 ± 0.10]	0.039 [1.0]

\* Pb containing terminations are not RoHS compliant, exemptions may apply

RATINGS AND CASE CODES							
F	6.3 V	10 V	16 V	20 V	25 V	35 V	50 V
0.33						A (11.0)	
0.47					A (8.5)		
1			A (6.5)	A (5.9)	A (5.2, 3.0) B (5.0)	A (6.6) B (4.4)	C (3.3)
1.5						B (4.2) C (3.3)	
2.2		A (4.6)	A (4.3)	A (5.9) B (3.5)	A (5.2) B (3.0)	B (2.5) C (2.2)	
3.3			A (3.4) B (3.0)	B (2.7) C (2.7)	B (3.0) C (2.0)	B (3.5, 2.5) C (1.7)	D (1.7)
4.7		A (2.9) B (2.7)	A (2.9) B (2.1)	A (5.0) B (2.9, 1.9) C (1.7)	A (5.0) B (2.8) C (1.6)	B (3.1) C (1.3) D (1.0)	C (1.5) D (0.9)
6.8			A (2.6, 2.0) B (1.8) C (1.7)	B (2.4) C (1.4)	C (1.8) D (0.9)	D (0.9)	
10	A (2.7)	A (3.4) B (1.8) C (1.7, 1.8)	B (2.0) C (1.4)	C (1.1)	C (1.1) D (0.9)	C (1.6) D (0.3, 0.7)	D (0.8) E (0.5)
15	B (1.8)	B (1.5, 1.8) C (1.4, 1.8)	B (2.0) C (1.0)	B (2.0) C (1.0) D (0.9)	B (2.0, 1.4) C (1.2) D (0.7)	D (0.7)	
22	B (1.5)	B (1.5) C (1.1)	B (1.9) C (1.0) D (0.8)	C (1.0) D (0.7)	D (0.6)	D (0.6, 0.3) E (0.5)	
33	B (1.7)	D (0.8)	C (0.9) D (0.6)	D (0.6)	D (0.5)		
47	B (1.8) C (0.8)	B (1.8) C (0.8, 0.5) D (0.6)	C (0.8) D (0.6)	D (0.7) E (0.6)	E (0.6)		
68	B (1.8)	C (0.8, 1.0) D (1.0, 0.6, 0.4)	D (0.6)	E (0.6)			
100		D (0.6)	D (0.6) E (0.6, 0.15)				
150		D (0.6)					
220		E (0.5)					

**Note**

- ESR limits in Ω are shown in parenthesis

MARKING																				
<p>Capacitance Code, pF</p> <p>Indicates High Temperature</p> <p>Polarity Band (+)</p> <p>Voltage Code</p> <p>A Case</p>	<p>“A” CASE VOLTAGE CODE</p> <table border="1"> <thead> <tr> <th>VOLTS</th> <th>CODE</th> </tr> </thead> <tbody> <tr> <td>4.0</td> <td>G</td> </tr> <tr> <td>6.3</td> <td>J</td> </tr> <tr> <td>10</td> <td>A</td> </tr> <tr> <td>16</td> <td>C</td> </tr> <tr> <td>20</td> <td>D</td> </tr> <tr> <td>25</td> <td>E</td> </tr> <tr> <td>35</td> <td>V</td> </tr> <tr> <td>50</td> <td>T</td> </tr> </tbody> </table>		VOLTS	CODE	4.0	G	6.3	J	10	A	16	C	20	D	25	E	35	V	50	T
	VOLTS	CODE																		
4.0	G																			
6.3	J																			
10	A																			
16	C																			
20	D																			
25	E																			
35	V																			
50	T																			
	<p>Indicates High Temperature</p> <p>Capacitance μF</p> <p>Voltage</p> <p>Polarity Band (+)</p> <p>Date Code</p> <p>Vishay Sprague Logo</p> <p>B, C, D, E Case</p>																			

**Marking**

Capacitor marking includes an anode (+) polarity band, capacitance in microfarads and the voltage rating. “A” case capacitors use a letter code for the voltage and EIA capacitance code.  
The Vishay Sprague® trademark is included if space permits. Capacitors rated at 6.3 V are marked 6 V.  
A manufacturing date code is marked on all capacitors.  
Call the factory for further explanation.



**Solid Tantalum Surface Mount Capacitors  
Tantamount® Molded Case, High Temperature**

Vishay Sprague

<b>RATINGS AND PART NUMBER REFERENCE</b>						
<b>CAPACITANCE ( F)</b>	<b>CASE CODE</b>	<b>PART NUMBER</b>	<b>MAX. DC LEAKAGE AT + 25 °C (<math>\mu</math>A)</b>	<b>MAX. DF AT + 25 °C (%)</b>	<b>MAX. ESR AT + 25 °C 100 kHz (<math>\Omega</math>)</b>	<b>MAX. RIPPLE 100 kHz <math>I_{rms}</math> (A)</b>
<b>6.3 V<sub>DC</sub> AT + 85 °C, 4 V<sub>DC</sub> AT + 125 °C, 3.15 V<sub>DC</sub> AT + 150 °C</b>						
10	A	TH3A106(1)6R3(2)2700	0.6	6	2.700	0.17
15	B	TH3B156(1)6R3(2)1800	0.9	6	1.800	0.22
22	B	TH3B226(1)6R3(2)1500	1.3	6	1.500	0.24
33	B	TH3B336(1)6R3(2)1700	2.0	6	1.700	0.22
47	B	TH3B476(1)6R3(2)1800	2.8	8	1.800	0.22
47	C	TH3C476(1)6R3(2)0800	2.8	6	0.800	0.37
68	B	TH3B686(1)6R3(2)1800	4.1	6	1.800	0.22
<b>10 V<sub>DC</sub> AT + 85 °C, 7 V<sub>DC</sub> AT + 125 °C, 5 V<sub>DC</sub> AT + 150 °C</b>						
2.2	A	TH3A225(1)010(2)4600	0.5	6	4.600	0.13
4.7	A	TH3A475(1)010(2)2900	0.5	6	2.900	0.16
4.7	B	TH3B475(1)010(2)2700	0.5	6	2.700	0.18
10	A	TH3A106(1)010(2)3400	1.0	6	3.400	0.15
10	B	TH3B106(1)010(2)1800	1.0	6	1.800	0.22
10	C	TH3C106(1)010(2)1800	1.0	6	1.800	0.25
10	C	TH3C106(1)010(2)1700	1.0	6	1.700	0.25
15	B	TH3B156(1)010(2)1800	1.0	6	1.800	0.22
15	B	TH3B156(1)010(2)1500	1.0	6	1.500	0.24
15	C	TH3C156(1)010(2)1800	1.0	6	1.800	0.25
15	C	TH3C156(1)010(2)1400	1.0	6	1.400	0.28
22	B	TH3B226(1)010(2)1500	2.2	6	1.500	0.24
22	C	TH3C226(1)010(2)1100	2.2	6	1.100	0.32
33	D	TH3D336(1)010(3)0800	3.3	6	0.800	0.43
47	B	TH3B476(1)010(2)1800	4.7	6	1.800	0.22
47	C	TH3C476(1)010(2)0800	4.7	6	0.800	0.37
47	C	TH3C476(1)010(2)0500	4.7	6	0.500	0.47
47	D	TH3D476(1)010(3)0600	4.7	6	0.600	0.50
68	C	TH3C686(1)010(2)1000	6.8	8	1.000	0.33
68	C	TH3C686(1)010(2)0800	6.8	8	0.800	0.37
68	D	TH3D686(1)010(3)1000	6.8	6	1.000	0.39
68	D	TH3D686(1)010(3)0600	6.8	6	0.600	0.50
68	D	TH3D686(1)010(3)0400	6.8	6	0.400	0.61
100	D	TH3D107(1)010(3)0600	10.0	8	0.600	0.50
150	D	TH3D157(1)010(3)0600	15.0	8	0.600	0.50
220	E	TH3E227(1)010(3)0500	22.0	8	0.500	0.61
<b>16 V<sub>DC</sub> AT + 85 °C, 10 V<sub>DC</sub> AT + 125 °C, 8 V<sub>DC</sub> AT + 150 °C</b>						
1	A	TH3A105(1)016(2)6500	0.5	4	6.500	0.11
2.2	A	TH3A225(1)016(2)4300	0.5	6	4.300	0.13
3.3	A	TH3A335(1)016(2)3400	0.5	6	3.400	0.15
3.3	B	TH3B335(1)016(2)3000	0.5	6	3.000	0.17
4.7	A	TH3A475(1)016(2)2900	0.8	6	2.900	0.16
4.7	B	TH3B475(1)016(2)2100	0.8	6	2.100	0.20
6.8	A	TH3A685(1)016(2)2600	1.1	6	2.600	0.17
6.8	A	TH3A685(1)016(2)2000	1.1	6	2.000	0.19
6.8	B	TH3B685(1)016(2)1800	1.1	6	1.800	0.22
6.8	C	TH3C685(1)016(2)1700	1.1	6	1.700	0.25
10	B	TH3B106(1)016(2)2000	1.6	6	2.000	0.21
10	C	TH3C106(1)016(2)1400	1.6	6	1.400	0.28

**Notes**

- (1) Capacitance Tolerance: K, M
- (2) Termination and Packaging: C, D, E, F
- (3) Termination and Packaging: A, B, C, D, E, F

RATINGS AND PART NUMBER REFERENCE						
CAPACITANCE ( F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C ( $\mu$ A)	MAX. DF AT + 25 °C (%)	MAX. ESR AT + 25 °C 100 kHz ( $\Omega$ )	MAX. RIPPLE 100 kHz $I_{rms}$ (A)
<b>16 V<sub>DC</sub> AT + 85 °C, 10 V<sub>DC</sub> AT + 125 °C, 8 V<sub>DC</sub> AT + 150 °C</b>						
15	B	TH3B156(1)016(2)2000	2.4	6	2.000	0.21
22	B	TH3B226(1)016(2)1900	3.5	6	1.900	0.21
22	C	TH3C226(1)016(2)1000	3.5	6	1.000	0.33
22	D	TH3D226(1)016(3)0800	3.5	6	0.800	0.43
33	C	TH3C336(1)016(2)0900	5.3	6	0.900	0.35
33	D	TH3D336(1)016(3)0600	5.3	6	0.600	0.50
47	C	TH3C476(1)016(2)0800	7.5	6	0.800	0.37
47	D	TH3D476(1)016(3)0600	7.5	6	0.600	0.50
68	D	TH3D686(1)016(3)0600	10.9	6	0.600	0.50
100	D	TH3D107(1)016(3)0600	16.0	8	0.600	0.50
100	E	TH3E107(1)016(3)0600	16.0	8	0.600	0.56
100	E	TH3E107(1)016(3)0150	16.0	8	0.150	1.11
<b>20 V<sub>DC</sub> AT + 85 °C, 13 V<sub>DC</sub> AT + 125 °C, 10 V<sub>DC</sub> AT + 150 °C</b>						
1	A	TH3A105(1)020(2)5900	0.5	4	5.900	0.11
2.2	A	TH3A225(1)020(2)5900	0.5	6	5.900	0.11
2.2	B	TH3B225(1)020(2)3500	0.5	6	3.500	0.16
3.3	B	TH3B335(1)020(2)2700	0.7	6	2.700	0.18
3.3	C	TH3C335(1)020(2)2700	0.7	6	2.700	0.20
4.7	A	TH3A475(1)020(2)5000	0.9	6	5.000	0.12
4.7	B	TH3B475(1)020(2)2900	0.9	6	2.900	0.17
4.7	B	TH3B475(1)020(2)1900	0.9	6	1.900	0.21
4.7	C	TH3C475(1)020(2)1700	0.9	6	1.700	0.25
10	C	TH3C106(1)020(2)1100	2.0	6	1.100	0.32
15	C	TH3C156(1)016(2)1000	2.4	6	1.000	0.33
15	B	TH3B156(1)020(2)2000	3.0	6	2.000	0.21
15	C	TH3C156(1)020(2)1000	3.0	6	1.000	0.33
15	D	TH3D156(1)020(3)0900	3.0	6	0.900	0.41
22	C	TH3C226(1)020(2)1000	4.4	6	1.000	0.33
22	D	TH3D226(1)020(3)0700	4.4	6	0.700	0.46
33	D	TH3D336(1)020(3)0600	6.6	6	0.600	0.50
47	D	TH3D476(1)020(3)0700	9.4	6	0.700	0.46
47	E	TH3E476(1)020(3)0600	9.4	6	0.600	0.56
68	E	TH3E686(1)020(3)0600	13.6	6	0.600	0.56
<b>25 V<sub>DC</sub> AT + 85 °C, 17 V<sub>DC</sub> AT + 125 °C, 12.5 V<sub>DC</sub> AT + 150 °C</b>						
0.47	A	TH3A474(1)025(2)8500	0.5	4	8.500	0.09
1	A	TH3A105(1)025(2)5200	0.5	4	5.200	0.12
1	A	TH3A105(1)025(2)3000	0.5	4	3.000	0.16
1	B	TH3B105(1)025(2)5000	0.5	4	5.000	0.13
2.2	A	TH3A225(1)025(2)5200	0.6	6	5.200	0.12
2.2	B	TH3B225(1)025(2)3000	0.6	6	3.000	0.17
3.3	B	TH3B335(1)025(2)3000	0.8	6	3.000	0.17
3.3	C	TH3C335(1)025(2)2000	0.8	6	2.000	0.23
4.7	A	TH3A475(1)025(2)5000	1.2	6	5.000	0.12
4.7	B	TH3B475(1)025(2)2800	1.2	6	2.800	0.17
4.7	C	TH3C475(1)025(2)1600	1.2	6	1.600	0.26
6.8	B	TH3B685(1)025(2)2400	1.7	6	2.400	0.19

**Notes**

- (1) Capacitance Tolerance: K, M
- (2) Termination and Packaging: C, D, E, F
- (3) Termination and Packaging: A, B, C, D, E, F



Solid Tantalum Surface Mount Capacitors  
Tantamount® Molded Case, High Temperature

Vishay Sprague


RATINGS AND PART NUMBER REFERENCE						
CAPACITANCE ( F)	CASE CODE	PART NUMBER	MAX. DC LEAKAGE AT + 25 °C ( $\mu$ A)	MAX. DF AT + 25 °C (%)	MAX. ESR AT + 25 °C 100 kHz ( $\Omega$ )	MAX. RIPPLE 100 kHz $I_{rms}$ (A)
<b>25 V<sub>DC</sub> AT + 85 °C, 17 V<sub>DC</sub> AT + 125 °C, 12.5 V<sub>DC</sub> AT + 150 °C</b>						
6.8	C	TH3C685(1)025(2)1400	1.7	6	1.400	0.28
10	C	TH3C106(1)025(2)1100	2.5	6	1.100	0.32
10	D	TH3D106(1)025(2)0900	2.5	6	0.900	0.41
15	B	TH3B156(1)025(2)2000	3.8	6	2.000	0.21
15	B	TH3B156(1)025(2)1400	3.8	6	1.400	0.25
15	C	TH3C156(1)025(2)1200	3.8	6	1.200	0.30
15	D	TH3D156(1)025(3)0700	3.8	6	0.700	0.46
22	D	TH3D226(1)025(3)0600	5.5	6	0.600	0.50
33	D	TH3D336(1)025(3)0500	8.3	6	0.500	0.55
47	E	TH3E476(1)025(3)0600	11.8	6	0.600	0.56
<b>35 V<sub>DC</sub> AT + 85 °C, 23 V<sub>DC</sub> AT + 125 °C, 17.5 V<sub>DC</sub> AT + 150 °C</b>						
0.33	A	TH3A334(1)035(2)11R0	0.5	4	11.000	0.08
1	A	TH3A105(1)035(2)6600	0.5	4	6.600	0.11
1	B	TH3B105(1)035(2)4400	0.5	4	4.400	0.14
1.5	B	TH3B155(1)035(2)4200	0.5	6	4.200	0.14
1.5	C	TH3C155(1)035(2)3300	0.5	6	3.300	0.18
2.2	B	TH3B225(1)035(2)2500	0.8	6	2.500	0.18
2.2	C	TH3C225(1)035(2)2200	0.8	6	2.200	0.22
3.3	B	TH3B335(1)035(2)3500	1.2	6	3.500	0.16
3.3	B	TH3B335(1)035(2)2500	1.2	6	2.500	0.18
3.3	C	TH3C335(1)035(2)1700	1.2	6	1.700	0.25
4.7	B	TH3B475(1)035(2)3100	1.7	6	3.100	0.17
4.7	C	TH3C475(1)035(2)1300	1.6	6	1.300	0.29
4.7	D	TH3D475(1)035(3)1000	1.6	6	1.000	0.39
6.8	C	TH3C685(1)035(2)1800	2.4	6	1.800	0.25
6.8	D	TH3D685(1)035(3)0900	2.4	6	0.900	0.41
10	C	TH3C106(1)035(2)1600	3.5	6	1.600	0.26
10	D	TH3D106(1)035(3)0700	3.5	6	0.700	0.46
10	D	TH3D106(1)035(3)0300	3.5	6	0.300	0.71
15	D	TH3D156(1)035(3)0700	5.3	6	0.700	0.46
22	D	TH3D226(1)035(3)0600	7.7	6	0.600	0.50
22	D	TH3D226(1)035(3)0300	7.7	6	0.300	0.71
22	E	TH3E226(1)035(3)0500	7.7	6	0.500	0.61
<b>50 V<sub>DC</sub> AT + 85 °C, 33 V<sub>DC</sub> AT + 125 °C, 25 V<sub>DC</sub> AT + 150 °C</b>						
1	C	TH3C105(1)050(2)3300	0.5	4	3.300	0.18
3.3	D	TH3D335(1)050(3)1700	1.7	6	1.700	0.30
4.7	C	TH3C475(1)050(2)1500	2.4	6	1.500	0.27
4.7	D	TH3D475(1)050(3)0900	2.4	6	0.900	0.41
6.8	D	TH3D685(1)050(3)0900	3.4	6	0.900	0.41
10	D	TH3D106(1)050(3)0800	5.0	6	0.800	0.43
10	E	TH3E106(1)050(3)0500	5.0	6	0.500	0.61

**Notes**

- (1) Capacitance Tolerance: K, M
- (2) Termination and Packaging: C, D, E, F
- (3) Termination and Packaging: A, B, C, D, E, F



**TYPICAL LEAKAGE CURRENT FACTOR**

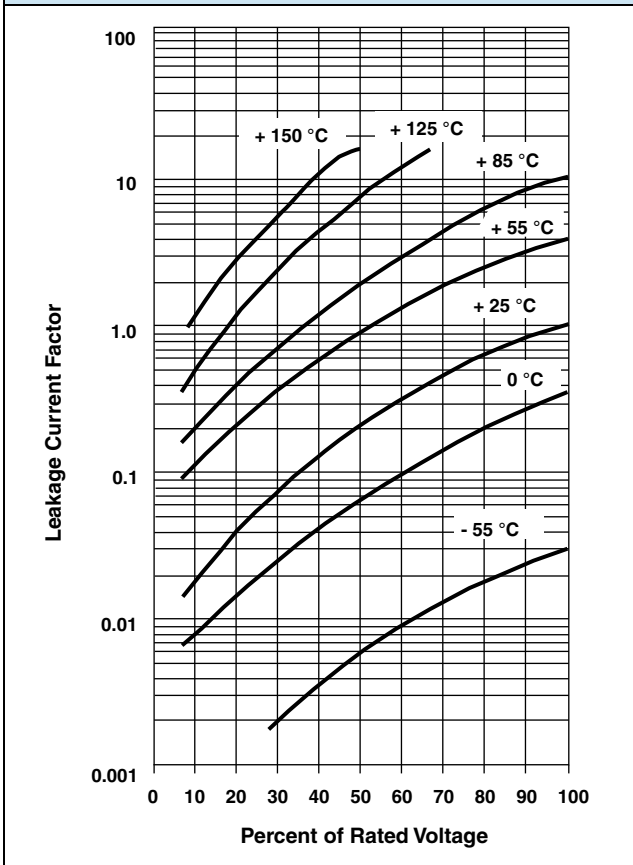

**Notes**

**At + 25 °C**, the leakage current shall not exceed the value listed in the Standard Ratings table.

**At + 85 °C**, the leakage current shall not exceed 10 times the value listed in the Standard Ratings table.

**At + 125 °C**, the leakage current shall not exceed 12 times the value listed in the Standard Ratings table.

**At + 150 °C**, the leakage current shall not exceed 15 times the value listed in the Standard Ratings table.



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.