

Multilayer Ceramic Chip Capacitors for Telecom Applications



FEATURES

- Replaces high voltage, leaded, film capacitors
- Rated for telecommunications voltages
- Saves board space and weight
- Surface mount (EIA size) packages
- Wide band operation, excellent high frequency filtering


RoHS
COMPLIANT

APPLICATIONS

- Ideal for telephone line (Tip 'N Ring®) filtering
- Voice over Internet (VOI) cards

ELECTRICAL SPECIFICATIONS

NOTE: Electrical characteristics at + 25 °C unless otherwise specified

Capacitance Range: 0.033 pF to 1.0 µF

Temperature Coefficient of Capacitance (TCC):
± 15 % from - 55 °C to + 125 °C

Dissipation Factor (DF):
2.5 % maximum at 1.0 Vrms and 1 kHz

Aging Rate: 1 % maximum per decade

Insulation Resistance (IR):

At + 25 °C and rated voltage 100 000 MΩ minimum or 1000 ΩF, whichever is less.

At + 125 °C and rated voltage 10 000 MΩ minimum or 100 ΩF, whichever is less.

Dielectric Withstanding Voltage (DWV):

This is the maximum voltage the capacitors are tested for a 1 to 5 second period and the charge/discharge current does not exceed 50 mA

250 Vdc: DWV at 250 % of rated voltage

DIMENSIONS in inches [millimeters]

PART ORDERING NUMBER	LENGTH	WIDTH	MAXIMUM THICKNESS (T)	TERMINATION PAD	
				MINIMUM	MAXIMUM
VJ1812	0.177 ± 0.010 [4.50 ± 0.25]	0.126 ± 0.010 [3.20 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
VJ1825	0.177 ± 0.010 [4.50 ± 0.25]	0.252 ± 0.010 [6.40 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]
VJ2225	0.220 ± 0.010 [5.59 ± 0.25]	0.250 ± 0.010 [6.35 ± 0.25]	0.086 [2.18]	0.010 [0.25]	0.030 [0.76]

ORDERING INFORMATION

VJ1812	Y	334	J	X	P	A	T	3T
CASE CODE	DIELECTRIC	CAPACITANCE NOMINAL CODE	CAPACITANCE TOLERANCE	TERMINATION	DC VOLTAGE RATING ¹⁾	MARKING	PACKAGING	PROCESS CODE
1812 1825 2225	Y = X7R	Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. Example: 334 = 330 000 pF	J = ± 5 % K = ± 10 % M = ± 20 %	X = Ni barrier with 100 % tin plated finish. F = AgPd	P = 250 V	A = Unmarked	T = 7" Reel, plastic tape R = 11 1/4" Reel, plastic tape B = Bulk W = Waffle tray	3T = Tip 'N Ring

Note

1. DC voltage rating should not be exceeded in application

TIP 'N RING® - X7R DIELECTRIC				
EIA TYPE		1812¹⁾	1825¹⁾	2225¹⁾
VOLTAGE (Vdc)		250	250	250
CAP. CODE	CAP.			
333	0.033 μ F			•
393	0.039 μ F			•
473	0.047 μ F			•
563	0.056 μ F			•
683	0.068 μ F			•
823	0.082 μ F			•
104	0.10 μ F	•		•
124	0.12 μ F	•		•
154	0.15 μ F	•	•	•
184	0.18 μ F	•	•	•
224	0.22 μ F	•	•	•
274	0.27 μ F	•	•	•
334	0.33 μ F	•	•	•
394	0.39 μ F	•	•	•
474	0.47 μ F	•	•	•
564	0.56 μ F		•	•
684	0.68 μ F		•	•
824	0.82 μ F			•
105	1.0 μ F			•





Note

1. See soldering recommendations within this data book, or visit www.vishay.com/doc?45034



Multilayer Ceramic Chip Capacitors
for Telecom Applications

TIP 'N RING® - TYPICAL PARAMETERS

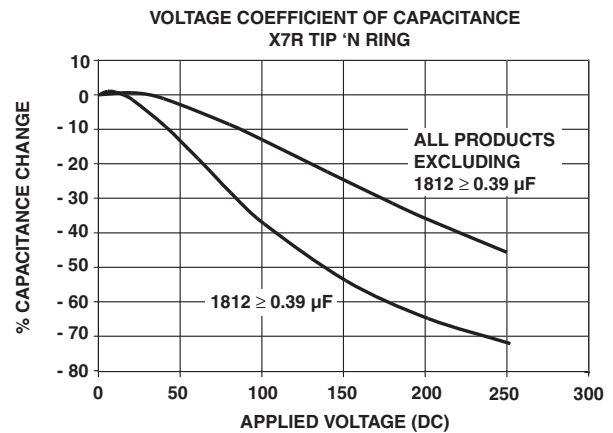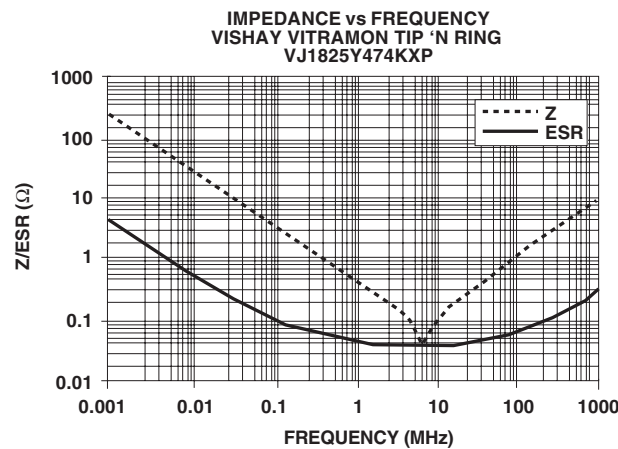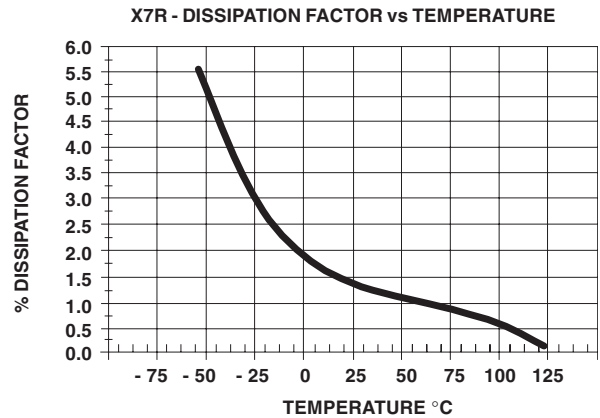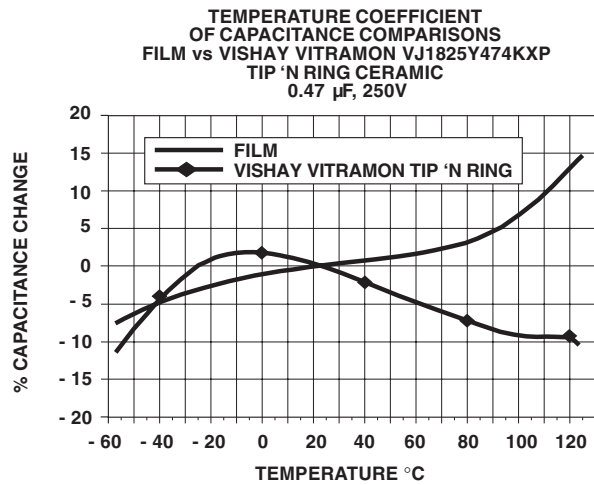

STANDARD PACKAGING QUANTITIES 1/2/3)

		7" REEL QUANTITIES		11 1/4" AND 13" REEL QUANTITIES		BULK QUANTITIES	
BODY SIZE	TAPE SIZE	PAPER TAPE PACKAGING CODE "C"	PLASTIC TAPE PACKAGING CODE "T"	PAPER TAPE PACKAGING CODE "P"	PLASTIC TAPE PACKAGING CODE "R"	VIAL PACKAGING CODE "B"	WAFFLE PACKAGING CODE "W"
1812	12 mm	N/A	1000	N/A	5000	1000	N/A
1825	12 mm	N/A	1000	N/A	5000	1000	1000
2225	12 mm	N/A	1000	N/A	5000	N/A	1000

Note

- Vishay Vitramon uses embossed plastic carrier tape
- REFERENCE: EIA Standard RS 481 - "Taping of Surface Mount Components for Automatic Placement"
- N/A = Not Available



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.