


Bulk Metal® Foil Technology High Precision 4-Terminal Power Current Sensing Resistors with TCR as low as $\pm 1 \text{ ppm}/^\circ\text{C}$ and Tolerance $\pm 0.1 \%$

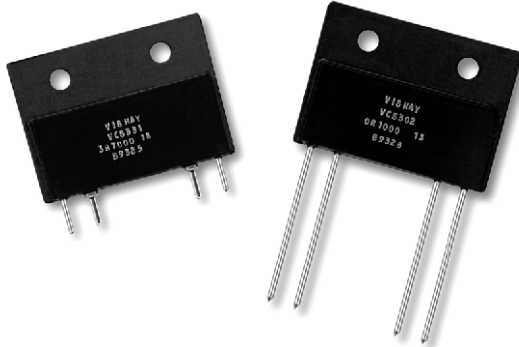

Any value at any tolerance available within resistance range

The 300 Series offers precision Bulk Metal® Foil technology resistors as low as 5 mΩ with a temperature coefficient down to 1 ppm/°C and unmatched long term stability. The 4 terminal current sensing resistors, when mounted on a heat sink, can sustain 10 watts continuously without an appreciable change in resistance (0.15 % maximum). The typical 50 % power derating specification associated with other technologies is not necessary. A choice of lead configurations is available.

Our Application Engineering Department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

FEATURES

- Temperature Coefficient of Resistance (TCR): down to $\pm 1 \text{ ppm}/^\circ\text{C}$ Max. (see table 2)
- Tolerance: to $\pm 0.1 \%$ (see table 1)
- Power Rating (heat-sinked): 10 W
- Load Life Stability: $\pm 0.05 \%$ at 25 °C, 2000 hours at Rated Power
- Resistance Range: 0.005 Ω to 500 Ω
- Electrostatic Discharge (ESD) above 25 000 V
- Non Inductive, Non Capacitive Design
- Rise Time: 1.0 ns without ringing
- Current Noise: < - 40 dB
- Thermal EMF: 0.05 μV/°C typical
- Voltage Coefficient: < 0.1 ppm/V
- Non Inductive: 0.08 μH
- Non Hot Spot Design
- Terminal Finishes available: Lead (Pb)-free
Tin/Lead Alloy
- Any value available within resistance range (e.g. 1K2345)
- Prototype samples available from 48 hours. For more information, please contact foil@vishay.com
- For better performances, please contact Application Engineering



RoHS*
COMPLIANT

TABLE 1 - CHARACTERISTICS

MODEL NUMBER	RESISTANCE RANGE	TOLERANCE ¹⁾	POWER RATING ²⁾ at + 25 °C	MAXIMUM CURRENT ²⁾
VCS301, VCS302	0.005 Ω < R < 0.1 Ω 0.1 Ω ≤ R < 0.25 Ω	$\pm 1 \%$ $\pm 0.5 \%$	10 W on Heat Sink ³⁾ or 3 W in Free Air	15 A
VCS331, VCS332	0.25 Ω < R < 500 Ω	$\pm 0.1 \%$		5 A


Notes

1. Tighter tolerance is available - for more details contact Application Engineering
2. The lower of the two limitations (Power or Current) is decisive
3. Heatsink - Aluminum (6 inches length x 4 inches width x 2 inches height x 0.04 inches thick)

TABLE 2 - TCR CHART (MAXIMUM)

(0 °C TO + 60 °C)		
≥ 0.005 Ω	to < 0.01 Ω	$\pm 15 \text{ ppm}/^\circ\text{C}$
≥ 0.01 Ω	to < 0.05 Ω	$\pm 10 \text{ ppm}/^\circ\text{C}$
≥ 0.05 Ω	to < 0.1 Ω	$\pm 5 \text{ ppm}/^\circ\text{C}$
≥ 0.1 Ω	to < 1 Ω	$\pm 3 \text{ ppm}/^\circ\text{C}$
≥ 1 Ω	to < 10 Ω	$\pm 2 \text{ ppm}/^\circ\text{C}$
≥ 10 Ω	to < 500 Ω	$\pm 1 \text{ ppm}/^\circ\text{C}$

FIGURE 1 - POWER DERATING CURVE

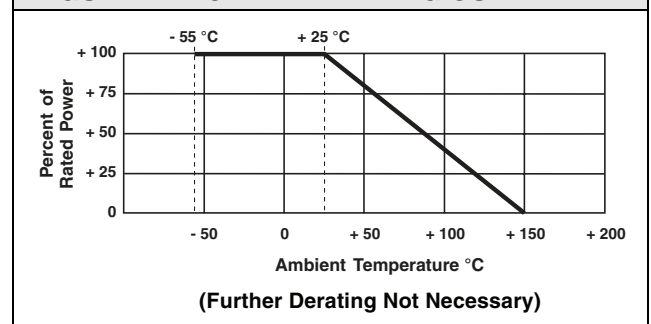

* Pb containing materials are not RoHS compliant, exemptions may apply

FIGURE 2 - TRIMMING TO VALUES

(Conceptual Illustration)


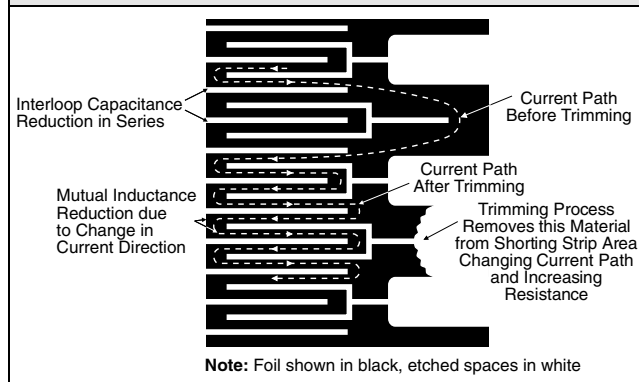


FIGURE 3 - TYPICAL TCR CURVE

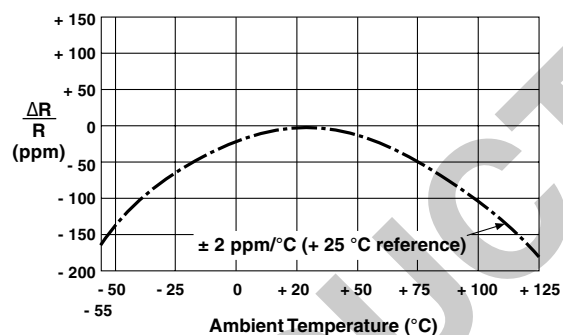


(For more details, see table 2)

FIGURE 4 - DIMENSIONS in inches (millimeters) AND SCHEMATIC

Model VCS301 and VCS331 (E Lead Rectangular)

Model VCS302 and VCS332 (Round Leads)

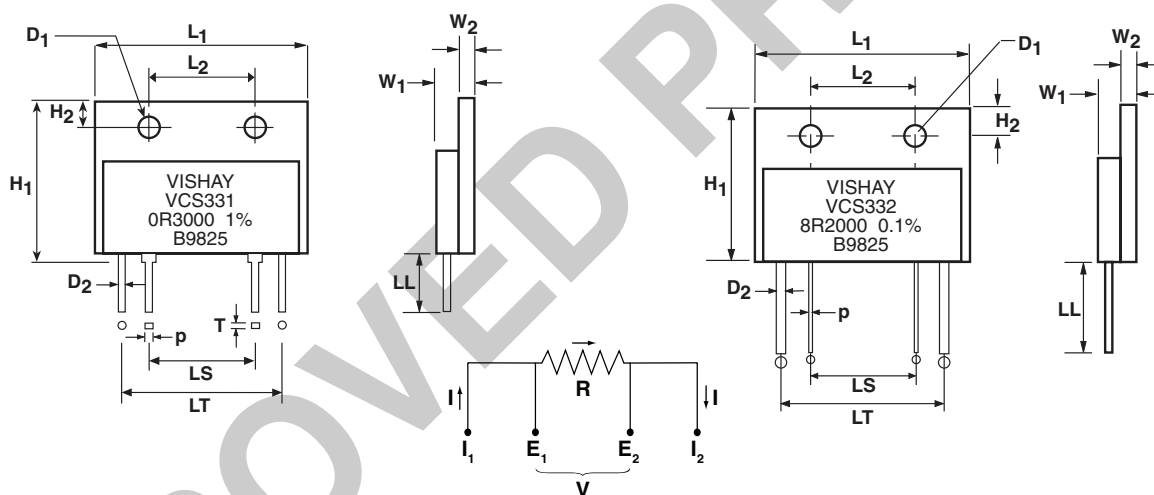

MODEL	L_1 ± 0.008 (± 0.20)	L_2 ± 0.008 (± 0.20)	H_1 MAXIMUM	H_2 ± 0.008 (± 0.20)	W_1 MAXIMUM	W_2 MAXIMUM	LL MINIMUM	LS ± 0.020 (± 0.51)	LT ± 0.020 (± 0.51)	D_1 NOMINAL	D_2 NOMINAL	P NOMINAL	T NO
VCS301 VCS331	1.340 (34.04)	0.701 (17.81)	1.063 (27.00)	0.197 (5.00)	0.210 (5.33)	0.087 (2.21)	0.216 (5.49)	0.689 (17.50)	1.083 (27.51)	0.138 (3.51)	0.040 (1.02)	0.040 (1.02)	0.016 (0.41)
VCS302 VCS332	1.340 (34.04)	0.701 (17.81)	1.024 (26.01)	0.197 (5.00)	0.210 (5.33)	0.087 (2.21)	1.000 (25.40)	0.689 (17.50)	1.083 (27.51)	0.138 (3.51)	0.040 (1.02)	0.032 (0.81)	-



Bulk Metal® Foil Technology High Precision
4-Terminal Power Current Sensing Resistors with
TCR as low as $\pm 1 \text{ ppm/}^\circ\text{C}$ and Tolerance $\pm 0.1 \%$

Vishay Foil Resistors

TABLE 3 - VISHAY VCS301, VCS302, VCS331, VCS332 PERFORMANCE


TEST OR CONDITION	VCS301, VCS302, VCS331, VCS332 PERFORMANCE ¹⁾
Maximum Ambient Temperature at Rated Power	$\pm 25^\circ\text{C}$
Maximum Ambient Temperature at Zero Power	$\pm 150^\circ\text{C}$
Temperature Coefficient	see table 2
Thermal Shock	$\pm 0.05 \%$
Short Time Overload (5 x Rated Power for 5 seconds)	$\pm 0.02 \%$
Terminal Strength	$\pm 0.05 \%$
High Temperature Exposure	$\pm 0.05 \%$ (2000 hours at 150°C)
Moisture Resistance	$\pm 0.05 \%$
Low Temperature Storage (24 hours at -55°C)	$\pm 0.05 \%$
Shock (Specified Pulse)	$\pm 0.1 \%$
Vibration (High Frequency)	$\pm 0.1 \%$
Load Life (Rated Power, $+25^\circ\text{C}$, 2000 hours)	$\pm 0.05 \%$
Resistance Tolerance	0.1 %, 0.5 %, 1 %, 2 %, 5 %
Thermal EMF	0.2 $\mu\text{V/}^\circ\text{C}$ Max. (E Terminal)
Weight	8.1 g maximum
Case Temperature Rise	17°C/W^2 (VCS301, VCS302) - 9°C/W^2 (VCS331, VCS332)
Thermal Resistance	8°C/W^2 (VCS301, VCS302) - 12.5°C/W^2 (VCS331, VCS332)

Notes

1. ΔR 's plus additional 0.0005 Ω for measurement error
2. All measurements done in free air

TABLE 4 - GLOBAL PART NUMBER INFORMATION


NEW GLOBAL PART NUMBER: Y09600R25000B9L (preferred part number format)

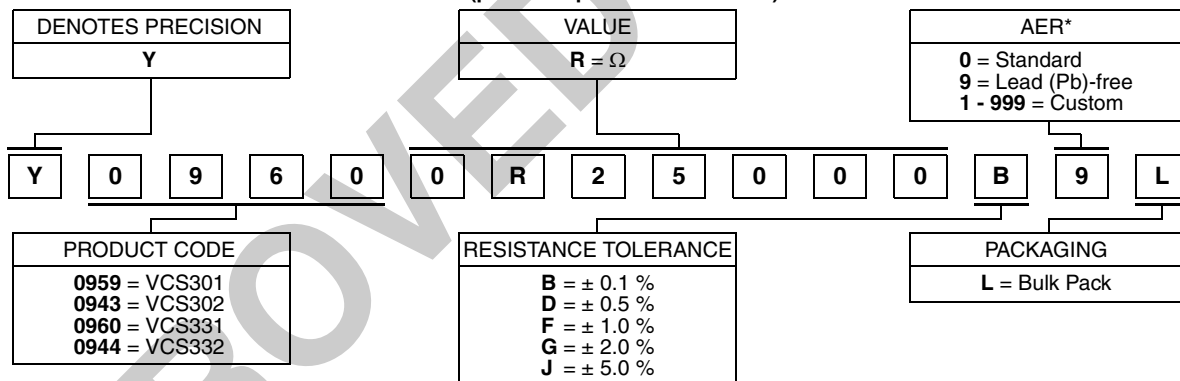

FOR EXAMPLE: ABOVE GLOBAL ORDER Y0960 0R25000 B 9 L:

TYPE: VCS331
VALUE: 0.25Ω
ABSOLUTE TOLERANCE: $\pm 0.1 \%$
TERMINATION: Lead (Pb)-free
PACKAGING: Bulk

HISTORICAL PART NUMBER: VCS331T 0R2500 B B (will continue to be used)

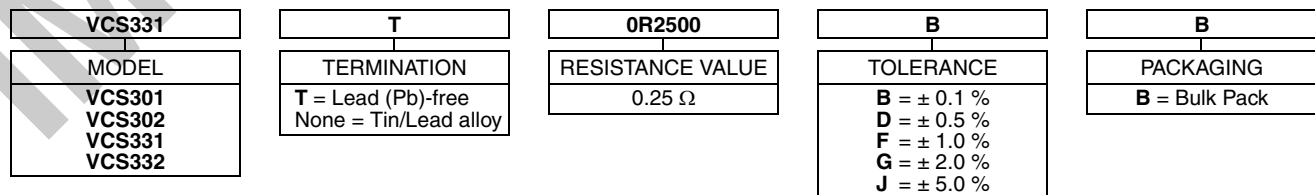**Note**

* For non-standard requests, please contact Application Engineering.



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.