

Metallized Polypropylene (PP) Capacitors PCM 7.5 mm to 37.5 mm

Special Features

- High volume/capacitance ratio
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2002/95/EC

Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- Oscillating circuits
- High frequency coupling and decoupling

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

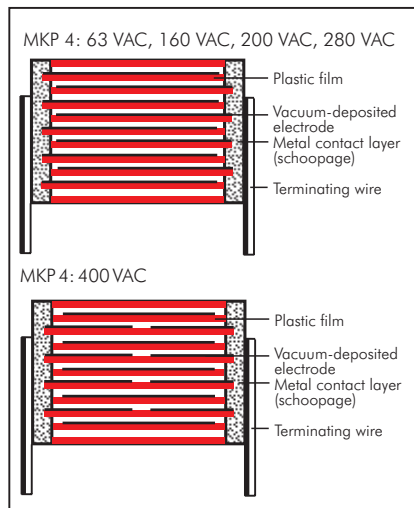

Encapsulation:

Solvent-resistant, flame-retardent plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.

Epoxy resin seal: Red

Electrical Data

Capacitance range:

1000 pF to 33 μ F (E12-values on request)

Rated voltages:

100 VDC, 250 VDC, 400 VDC, 630 VDC, 1000 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:

-55° C to $+100^{\circ}$ C

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at $+20^{\circ}$ C:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

(mean value: $5 \times 10^5 \text{ M}\Omega$)

$C > 0.33 \mu\text{F}$: $\geq 30\,000 \text{ sec (M}\Omega \times \mu\text{F)}$

(mean value: 100 000 sec)

Measuring voltage: 100 V/1 min.

Dissipation factors at $+20^{\circ}$ C: $\tan \delta$

at f	$C \leq 0.1 \mu\text{F}$	$0.1 \mu\text{F} < C \leq 1.0 \mu\text{F}$	$C > 1.0 \mu\text{F}$
1 kHz	$\leq 4 \times 10^{-4}$	$\leq 5 \times 10^{-4}$	$\leq 10 \times 10^{-4}$
10 kHz	$\leq 6 \times 10^{-4}$	$\leq 8 \times 10^{-4}$	-
100 kHz	$\leq 25 \times 10^{-4}$	-	-

Maximum pulse rise time:

Capacitance pF/ μ F	max. pulse rise time V/ μ sec at $T_A < 40^{\circ}$ C				
	100 VDC	250 VDC	400 VDC	630 VDC	1000 VDC
1000 ... 6800	550	550	550	600	650
0.01 ... 0.022	450	450	450	500	550
0.033 ... 0.068	250	250	300	350	400
0.1 ... 0.22	150	150	200	250	300
0.33 ... 0.68	100	100	150	200	200
1.0 ... 2.2	75	100	100	150	150
3.3 ... 4.7	60	100	100	120	-
6.8 ... 10	40	50	60	85	-
15 ... 33	35	50	-	-	-

for pulses equal to the rated voltage

Mechanical Tests

Pull test on leads:

$d \leq 0.8 \phi$: 10 N in direction of leads

$d > 0.8 \phi$: 20 N in direction of leads

according to IEC 60068-2-21

Vibration:

6 hours at 10...2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

Low air density:

1kPa = 10 mbar in accordance with

IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec²

in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Continuation

General Data

Capacitance	100 VDC/63 VAC*				250 VDC/160 VAC*				400 VDC/200 VAC*				630 VDC/280 VAC*				1000 VDC/400 VAC*			
	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**	W	H	L	PCM**
1000 pF	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5
1500 "	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5
2200 "	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	3	8.5	10	7.5*
3300 "	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	3	8.5	10	7.5*	4	9	13	10*
4700 "	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	3	8.5	10	7.5*	4	9	13	10*
6800 "	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	3	8.5	10	7.5*	4	9	13	10*
6800 "	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	3	8.5	10	7.5*	4	9	13	10*
0.01 µF	2.5	7	10	7.5	2.5	7	10	7.5	2.5	7	10	7.5	3	8.5	10	7.5*	4	9	13	10*
0.015 "	2.5	7	10	7.5	2.5	7	10	7.5	3	8.5	10	7.5*	4	9	10	7.5*	4	9	13	10*
0.022 "	2.5	7	10	7.5	2.5	7	10	7.5	4	9	13	10*	4	9	13	10*	4	9	13	10*
0.033 "	2.5	7	10	7.5	2.5	7	10	7.5	4	9	13	10*	4.5	9.5	10.3	7.5*	4	9	13	10*
0.033 "	3	8.5	10	7.5*	3	8.5	10	7.5*	4.5	9.5	10.3	7.5*	5	10.5	10.3	7.5*	4	9	13	10*
0.047 "	4	9	13	10*	4	9	13	10*	4	9	13	10*	4	9	13	10*	5	11	18	15*
0.047 "	4	9	10	7.5*	4	9	10	7.5*	5	10.5	10.3	7.5*	5.7	12.5	10.3	7.5*	5	11	13	10*
0.047 "	4	9	13	10*	4	9	13	10*	4	9	13	10*	5	11	13	10*	5	11	13	10*
0.068 "	4	9	10	7.5*	4	9	10	7.5*	5.7	12.5	10.3	7.5*	6	12	13	10*	6	12	13	10*
0.068 "	4	9	13	10*	4	9	13	10*	5	11	13	10*	6	12.5	18	15*	6	12.5	18	15*
0.1 µF	4.5	9.5	10.3	7.5*	4.5	9.5	10.3	7.5*	6	12	13	10*	7	14	18	15	7	14	18	15
0.1 µF	4	9	13	10*	4	9	13	10*	5	11	18	15*	7	14	18	15	7	14	18	15
0.15 µF	5	10.5	10.3	7.5*	5	10.5	10.3	7.5*	6	12.5	18	15	8	15	18	15*	8.5	18.5	26.5	22.5
0.15 µF	5	11	13	10*	5	11	13	10*	6	12.5	18	15	6	15	26.5	22.5*	8.5	18.5	26.5	22.5
0.22 µF	6	12	13	10*	6	12	13	10*	7	14	18	15	9	16	18	15*	11	21	26.5	22.5*
0.22 µF	5	11	18	15*	5	11	18	15*	7	14	18	15	7	16.5	26.5	22.5*	11	21	26.5	22.5*
0.33 µF	6	12.5	18	15	6	12.5	18	15	8	15	18	15*	8.5	18.5	26.5	22.5	11	21	31.5	27.5*
0.33 µF	6	12.5	18	15	6	12.5	18	15	6	15	26.5	22.5*	8.5	18.5	26.5	22.5	11	21	31.5	27.5
0.47 µF	7	14	18	15	7	14	18	15	7	16.5	26.5	22.5	10.5	19	26.5	22.5*	13	24	31.5	27.5
0.47 µF	7	14	18	15	7	14	18	15	7	16.5	26.5	22.5	10.5	19	26.5	22.5*	13	24	31.5	27.5
0.68 µF	8	15	18	15*	8	15	18	15*	8.5	18.5	26.5	22.5	11	21	31.5	27.5*	17	29	31.5	27.5
0.68 µF	6	15	26.5	22.5*	6	15	26.5	22.5*	8.5	18.5	26.5	22.5	11	21	31.5	27.5	17	29	31.5	27.5
1.0 µF	7	16.5	26.5	22.5	7	16.5	26.5	22.5	11	21	26.5	22.5*	13	24	31.5	27.5	17	29	41.5	37.5
1.5 "	10.5	19	26.5	22.5	10.5	19	26.5	22.5	11	21	31.5	27.5*	15	26	31.5	27.5	20	39.5	41.5	37.5
2.2 "	11	21	26.5	22.5*	11	21	26.5	22.5*	15	26	31.5	27.5	17	29	41.5	37.5	24	45.5	41.5	37.5
3.3 "	11	21	31.5	27.5*	11	21	31.5	27.5*	17	29	31.5	27.5*	19	32	41.5	37.5				
3.3 "	13	24	31.5	27.5	13	24	31.5	27.5	17	29	31.5	27.5*	19	32	41.5	37.5				
4.7 "	13	24	31.5	27.5	15	26	31.5	27.5	17	29	41.5	37.5*	20	39.5	41.5	37.5				
6.8 "	15	26	31.5	27.5*	17	29	31.5	27.5*	20	39.5	41.5	37.5	24	45.5	41.5	37.5				
6.8 "	13	24	41.5	37.5*	15	26	41.5	37.5*	20	39.5	41.5	37.5	24	45.5	41.5	37.5				
10 µF	17	29	41.5	37.5	19	32	41.5	37.5	24	45.5	41.5	37.5	Dims. in mm.							
15 "	19	32	41.5	37.5	20	39.5	41.5	37.5	Taped version see page 100.											
22 "	20	39.5	41.5	37.5	24	45.5	41.5	37.5												
33 "	24	45.5	41.5	37.5																

* AC voltage: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

** PCM = Printed circuit module = lead spacing

■ New values and box sizes.

* On ordering please state the required PCM (lead spacing!)
If not specified, smaller PCM will be booked.

Rights reserved to amend design data without prior notification.

∅ d	PCM	W
0.5	7.5	≤ 3
0.7	7.5	≥ 4
0.7	10	
0.8	15 - 22.5	
0.8	27.5	≤ 15
1.0	27.5	> 15
1.0	37.5	

