


| 序号/RevNo. | 名称/Title  | 文件编号/File No.        |
|-----------|-----------|----------------------|
| 1         | 107F塑件主体  | QJ/XYT-11097---11100 |
| 2         | 107塑件后盖   | QJ/XYT-11101---11104 |
| 3         | 107F铁壳    | QJ/XYT-11085---11088 |
| 4         | DR螺丝      | QJ/XYT-11084         |
| 5         | 107F端子(短) | QJ/XYT-11080         |
| 6         | 107F端子(长) | QJ/XYT-11081         |
| 7         | 107Z字片    | QJ/XYT-11083         |

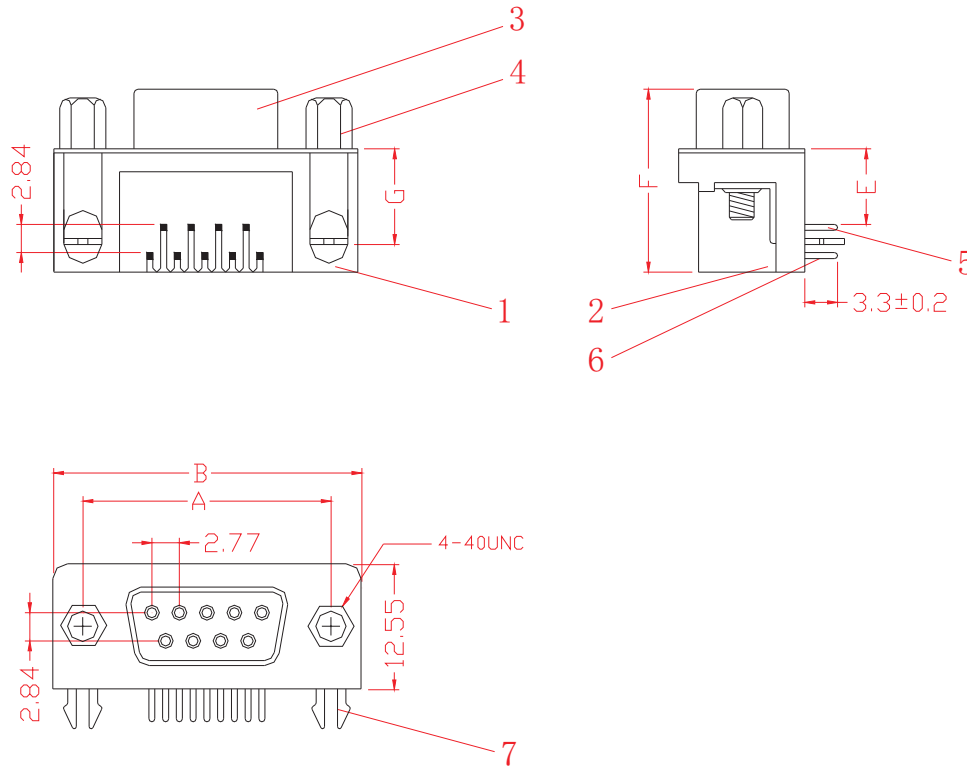

Specifications:

Contact Resistance: 30mΩ max.at dc 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute  
 Operating Temperature:-55℃--+105℃  
 Contact: Phosphor bronze  
 Housing: PBT &30% Glass Fiber(UL 94V-0)

| Position | A     | B     |
|----------|-------|-------|
| 9        | 24.99 | 30.81 |
| 15       | 33.32 | 39.20 |
| 25       | 47.04 | 53.10 |
| 37       | 63.50 | 69.50 |

| E     | F     | G     |
|-------|-------|-------|
| 7.2   | 18.4  | 9.62  |
| 9.4   | 20.64 | 12.06 |
| 13.84 | 25.3  | 16.5  |

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

| 设计/Designed by  | 绘图/Drawing by | 审核/Checked by | 批准/Approved by | 未注公差<br>General Tolerance |       |
|---|---------------|---------------|----------------|---------------------------|-------|
|   |               |               |                | x.                        | ±0.2  |
|   |               |               |                | .x                        | ±0.1  |
|   |               |               |                | .xx                       | ±0.05 |
| 图名/Title: 107F产品图<br>文件编号/File No.: QJ/XYT-12014<br>页序/Sheet: |               |               |                | .xxx                      | ±0.01 |
| 备注/Remark   |               |               |                | 单位/units: mm              |       |

| 序号/RevNo. | 更改记录/Revision note | 签名/Signature | 日期/Date |
|-----------|--------------------|--------------|---------|
|           |                    |              |         |