


序号/RevNo.	名称/Title	文件编号/File No.
1	118-B塑件	QJ/XYT-11232
2	118-B端子	QJ/XYT-11233

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute  
 Operating Temperature: -55°C- +105°C  
 Contact: Brass  
 Housing: PBT &30% Glass Fiber (UL 94V-0)

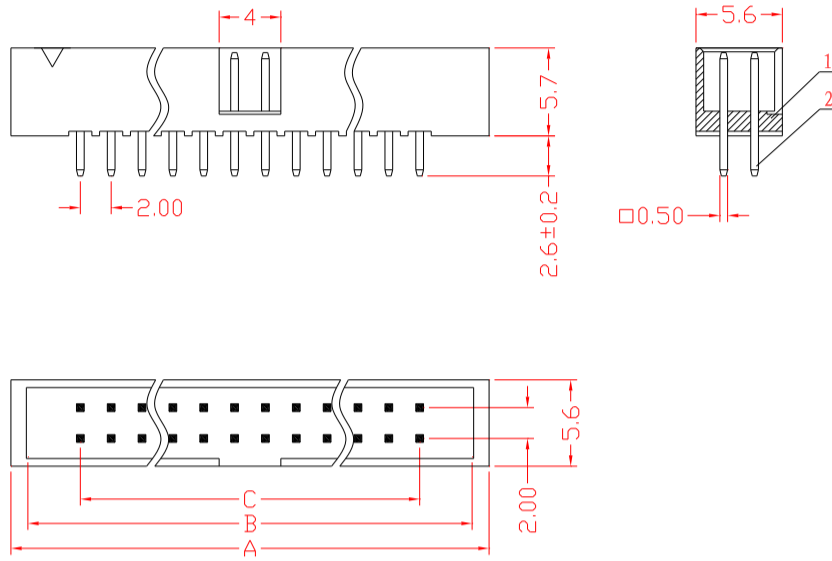

Position	A	B	C
10	17.2	16.1	8
12	19.2	18.1	10
14	21.2	20.1	12
16	23.2	22.1	14
20	27.2	26.1	18
26	33.2	32.1	24
30	37.2	36.1	28
34	41.2	40.1	32
40	47.2	46.1	38
50	57.2	56.1	48
60	67.2	66.1	58
64	71.2	70.1	62

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance		
				x. ±0.2 x.' ±2'		
				图名/Title	文件编号/File No.	.x ±0.1 .x' ±1'
				118-B直针产品图	QJ/XYT-12048	.xx ±0.05 .xx' ±0.5'
备注/Remark				.xxx ±0.01		
				单位/Units: mm		

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date


序号/RevNo.	名称/Title	文件编号/File No.
1	118-B塑件	QJ/XYT-11232
2	118-B端子(短)	QJ/XYT-11233
3	118-B端子(长)	QJ/XYT-11233

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA  
 Insulator Resistance: 1000MΩ min.at DC 500V  
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute  
 Operating Temperature: -55°C- +105°C  
 Contact: Brass  
 Housing: PBT &30% Glass Fiber (UL 94V-0)

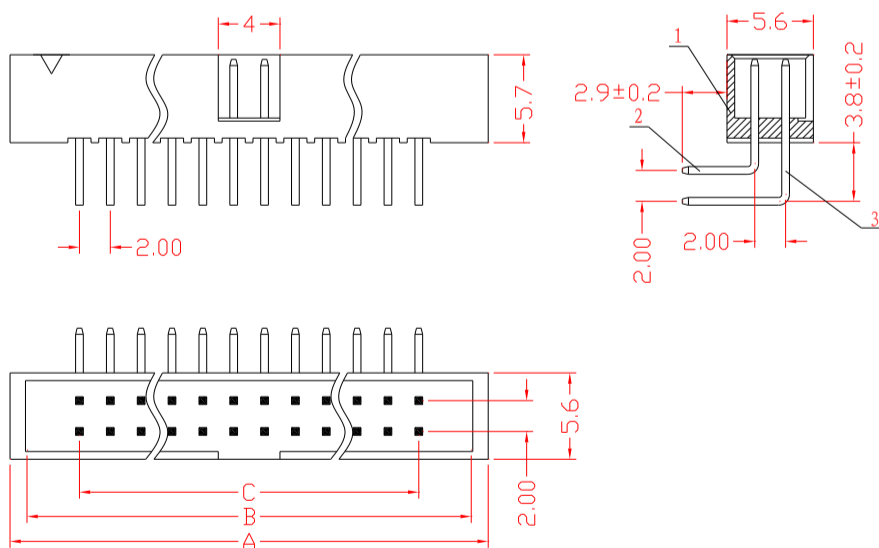

Position	A	B	C
10	17.2	16.1	8
12	19.2	18.1	10
14	21.2	20.1	12
16	23.2	22.1	14
20	27.2	26.1	18
26	33.2	32.1	24
30	37.2	36.1	28
34	41.2	40.1	32
40	47.2	46.1	38
50	57.2	56.1	48
60	67.2	66.1	58
64	71.2	70.1	62

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance		
				x. ±0.2 x.' ±2'		
				图名/Title	文件编号/File No.	.x ±0.1 .x' ±1'
				118-B弯针产品图	QJ/XYT-12049	.xx ±0.05 .xx' ±0.5'
备注/Remark				.xxx ±0.01		
				单位/Units: mm		

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date