


Specification:

Contact resistance: 30mΩ max.at DC100mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Rated current : 1AMP

Dielectric Withstanding:



Voltage: AC 500V For 1minute
 Operating Temperature: -55℃--+105℃
 Contact: Brass
 Housing: PBT & 30% Glass Fiber (UL 94V-0)

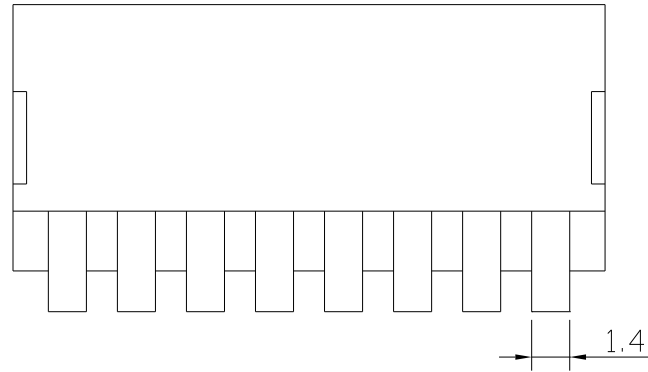

Position	2	3	4	5	6	7	8	9	10	12
A	6.38	8.92	11.46	14.00	16.54	19.08	21.62	24.16	26.70	31.78

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	x. ±0.2	x.' ±2'
		160-DP		.x ±0.1	.x' ±1'
		页序/Sheet		.xx ±0.05	.xx' ±0.5'
		备注/Remark		.xxx ±0.01	
				单位/Units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

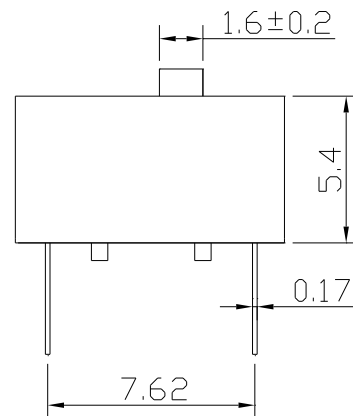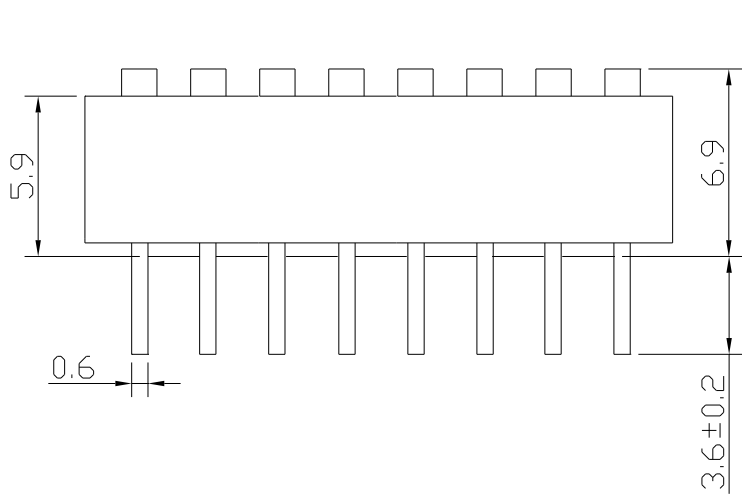


Specification:

Contact resistance: 30mΩ max.at DC100mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Rated current : 1AMP

Dielectric Withstanding:

Voltage: AC 500V For 1minute
 Operating Temperature: -55℃--+105℃
 Contact: Brass
 Housing: PBT & 30% Glass Fiber (UL 94V-0)

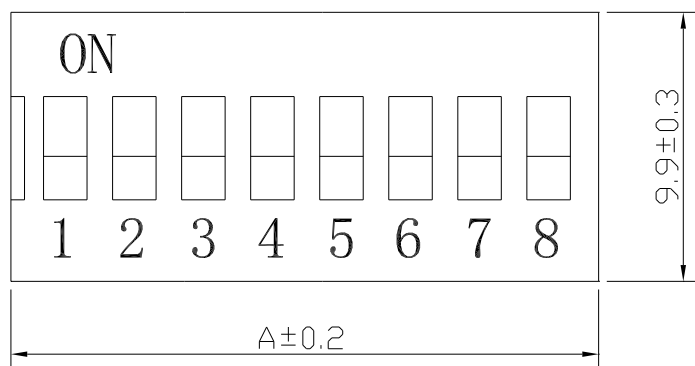

Position	2	3	4	5	6	7	8	9	10	12
A	6.38	8.92	11.46	14.00	16.54	19.08	21.62	24.16	26.70	31.78

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新亚联合科技 XINYA UNITED TECH CO.,LTD.		图名/Title	文件编号/File No.	x. ±0.2	x.' ±2'
		160-DS		.x ±0.1	.x' ±1'
		页序/Sheet		.xx ±0.05	.xx' ±0.5'
		备注/Remark		.xxx ±0.01	
				单位/Units: mm	

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------